

# QuMax for Ericsson (Cradlepoint) S400

## INTEGRATED MULTI-BAND 5G DIRECTIONAL ANTENNA + WI-FI 6E OMNI ANTENNA + PLACE TO INSTALL ERICSSON (CRADLEPOINT) S400 (ALL-IN-ONE)

QuMax antenna for Ericsson (Cradlepoint) S400 router is a perfect outdoor device for improving the signal in rural/suburban and locations where the mobile signal is weak. It has embedded directional 5G and omni Wi-Fi 6E antenna. If you use S400 with QuMax antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

Wi-Fi 6E support!



OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP68



MOUNTING SYSTEM WITH TWO PLANES, 60 DEGREES REGULATION



WIDE BAND 600-6000MHZ, 5G TECHNOLOGY



ANTENNA PERFECTLY MATCHED WITH THE ERICSSON (CRADLEPOINT) S400



ALL ANTENNAS AND ERICSSON (CRADLEPOINT) ROUTER INTEGRATED IN ONE ENCLOSURE



## 5G / LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz
GAIN	617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	80°/80° ±15°
POLARIZATION	X (±45degrees)
IMPEDANCE	50 $\Omega$

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	26.9 x 26.95 x 17.7 cm 10.6 x 10.6 x 7 inch
WEIGHT	2.8 kg 6.17 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0,6 - 0,8 Nm

MAST DIAMETER

25-66mm  
0.98-2.60 inch

## FREQUENCY BANDS

LTE / 4G

1	2	3	4	5	7	8
9	10	12	13	14	17	18
19	20	22	25	26	27	28
29	30	33	34	35	36	37
38	39	40	41	42	43	44
46	47	48	49	52	53	65
66	67	68	69	71	85	103
106						

617 MHz

6000 MHz

5G

n1	n2	n3	n5	n7	n8	n12
n13	n14	n18	n20	n25	n26	n28
n29	n30	n34	n38	n39	n40	n41
n46	n47	n48	n53	n65	n66	n67
n71	n77	n78	n79	n80	n81	n82
n83	n84	n85	n86	n89	n90	n95
n97	n98	n100	n101	n256		


617 MHz

6000 MHz




## PLOTS


### LTE VSWR

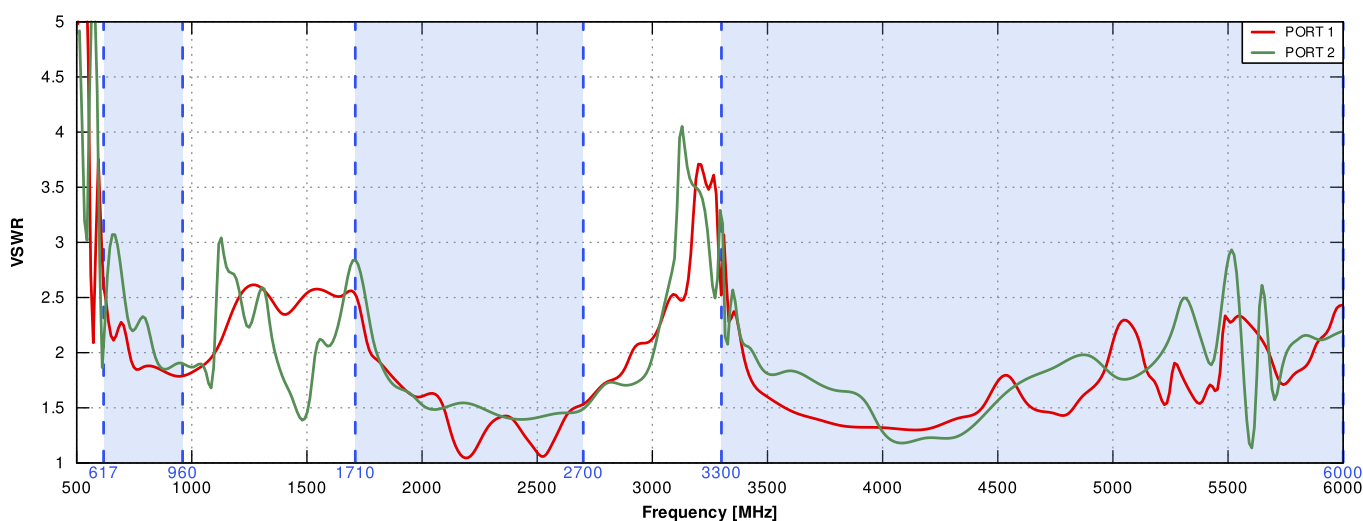


### WI-FI VSWR

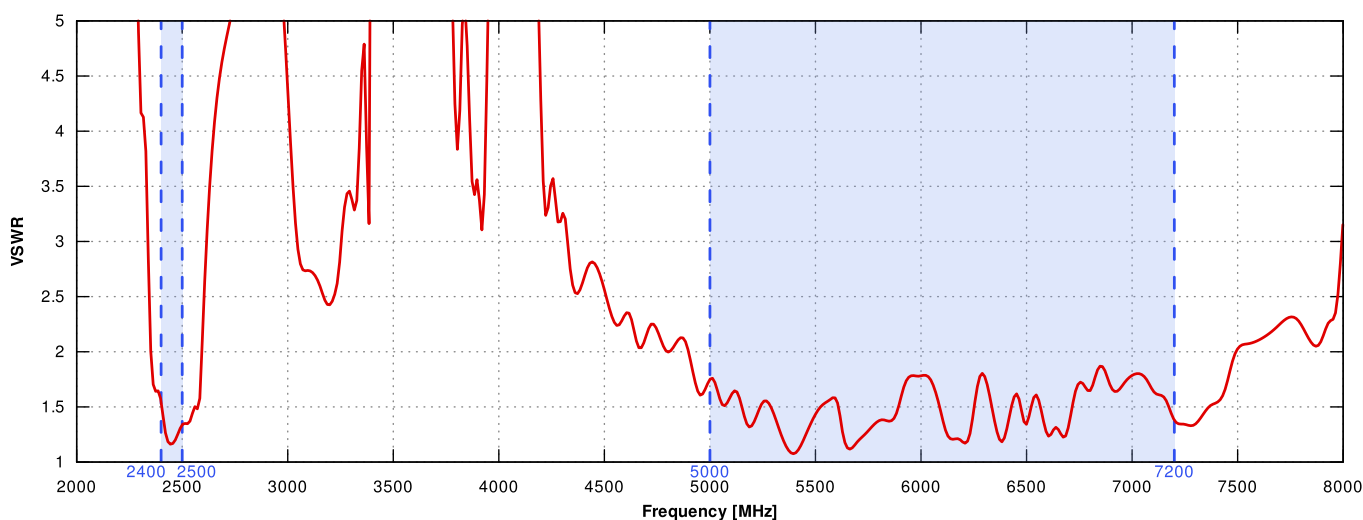


LTE Gain

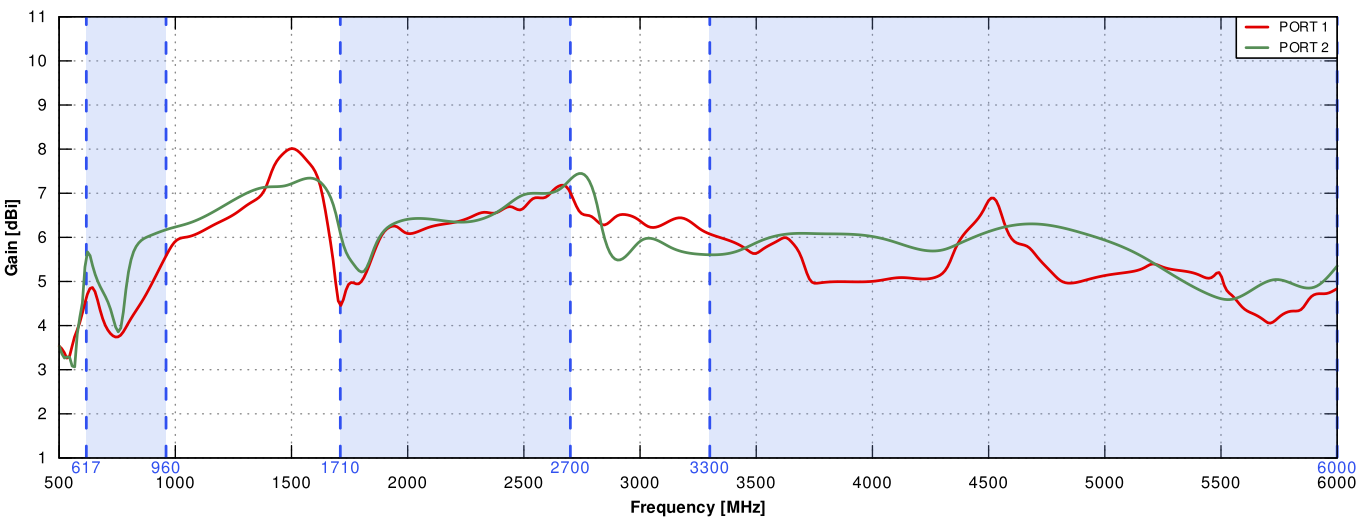


WI-FI Gain

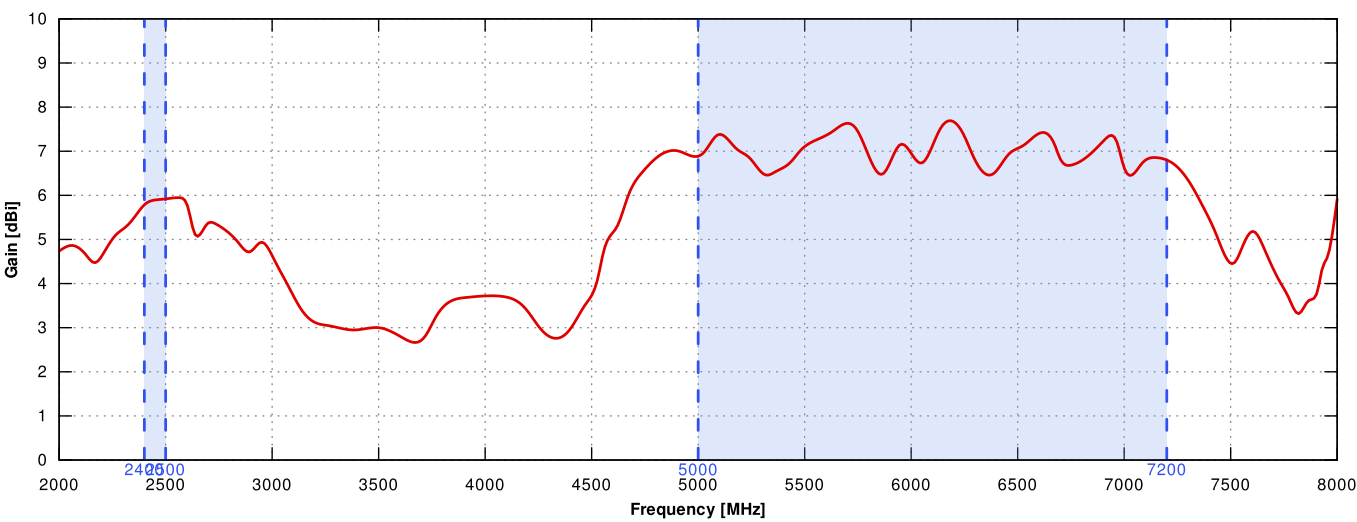


## PORT 1 - 5G/LTE from 650MHz to 950MHz

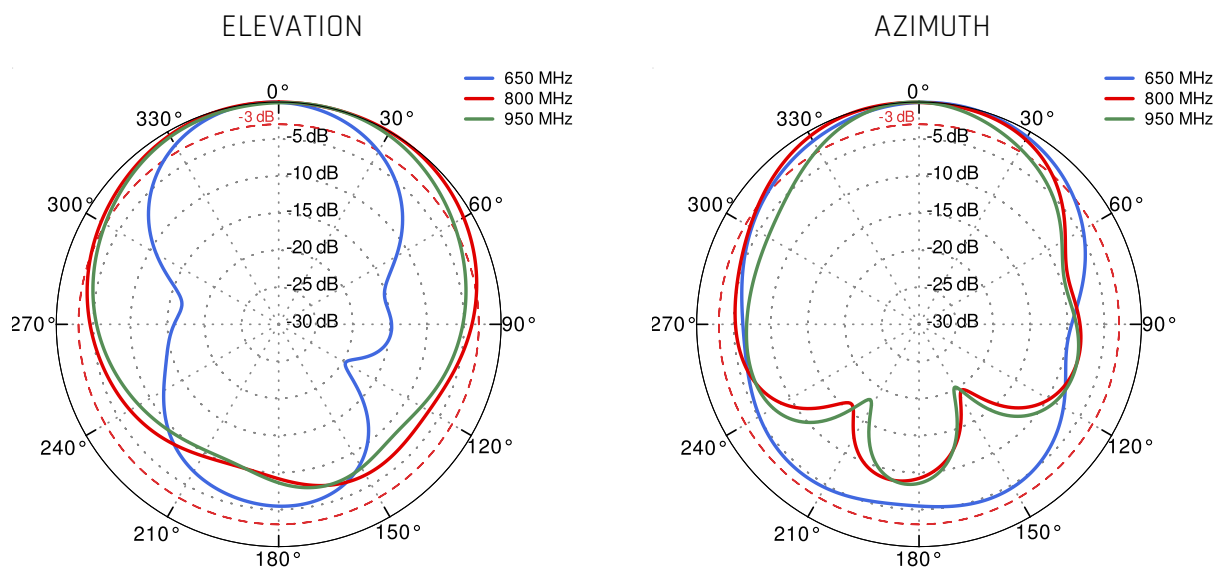


## PORT 1 - 5G/LTE from 1.71GHz to 2.17GHz

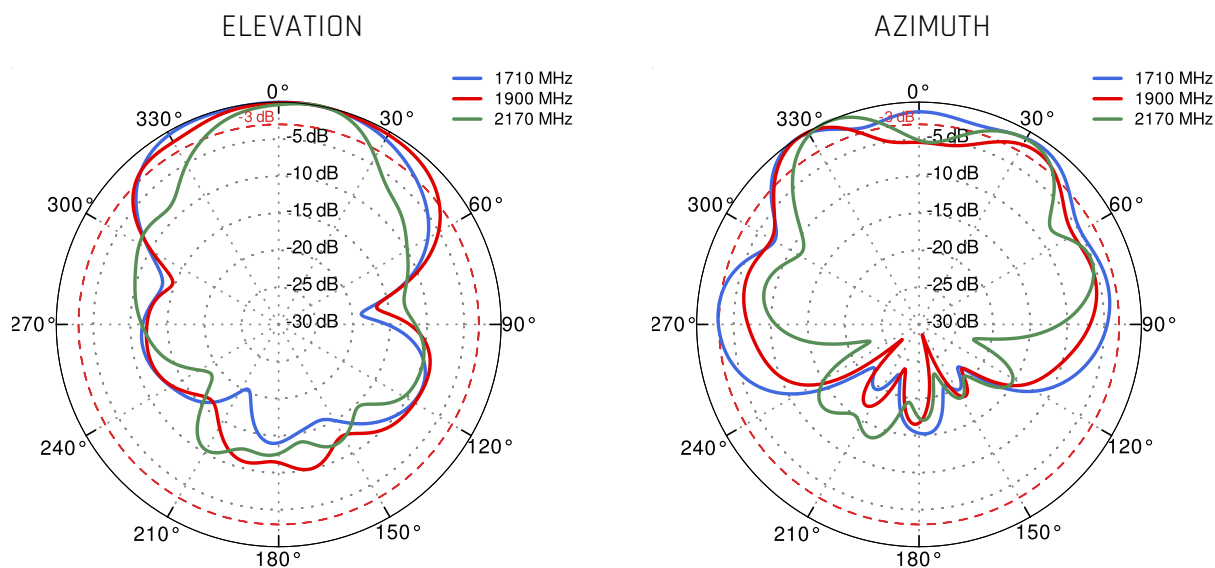


## PORT 1 - 5G/LTE from 2.3GHz to 2.7GHz

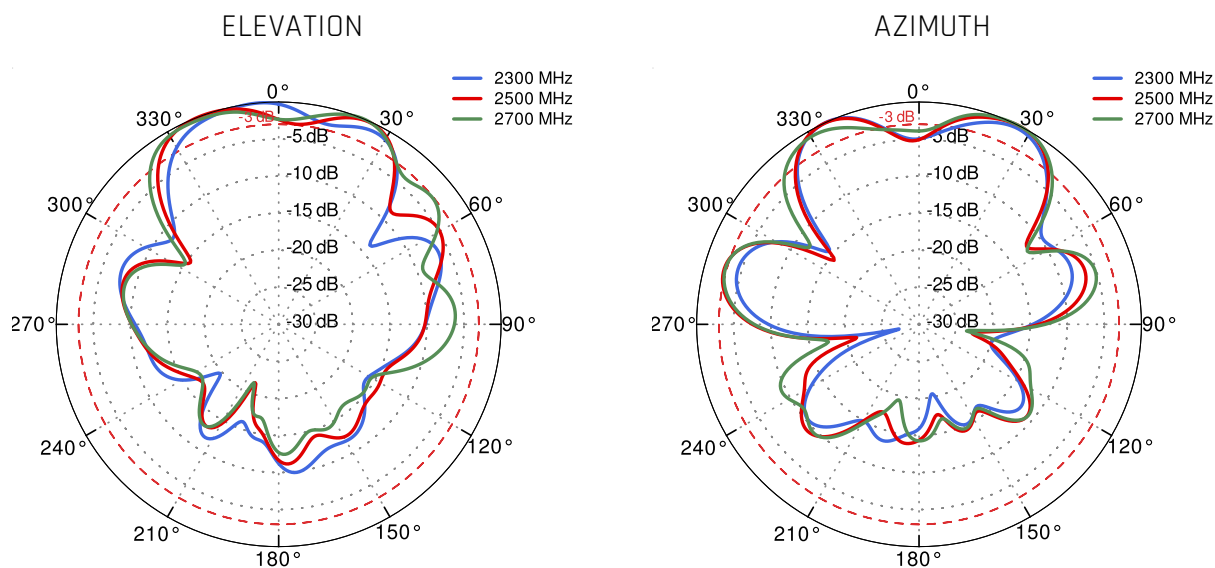


## PORT 1 - 5G/LTE from 3.3GHz to 3.8GHz

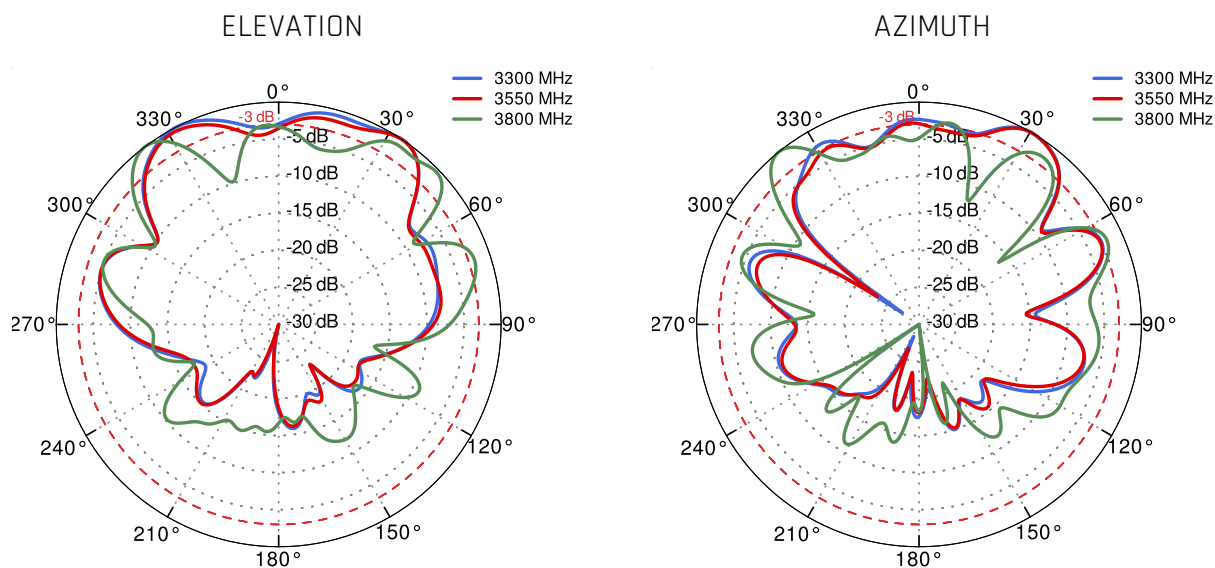


## PORT 1 - 5G/LTE from 4.2GHz to 4.6GHz

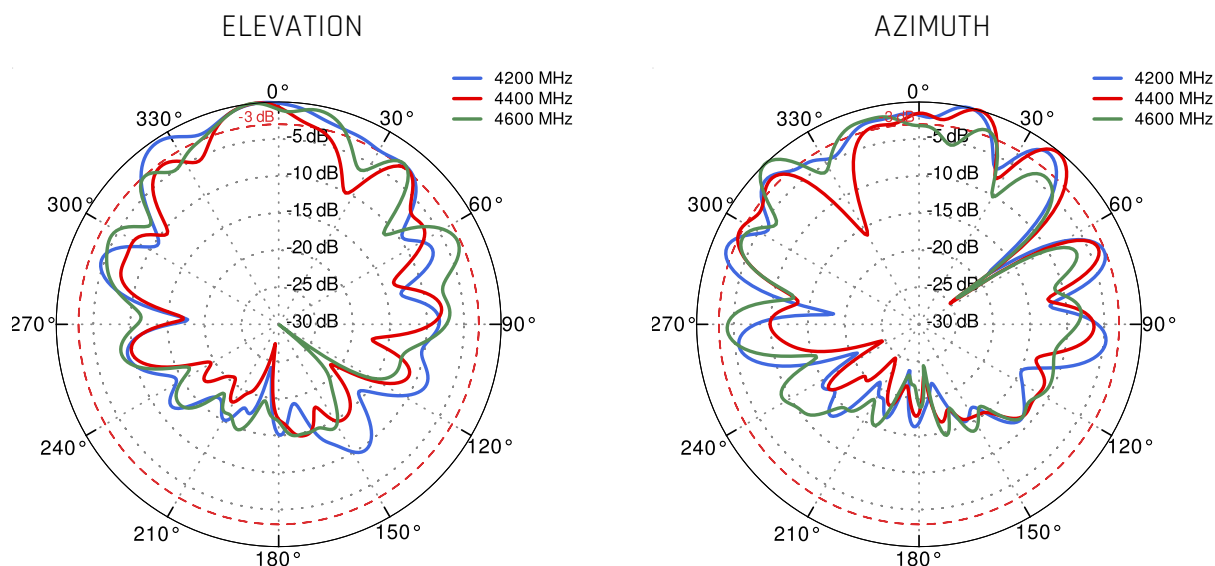


## PORT 1 - 5G/LTE from 5.0GHz to 5.9GHz

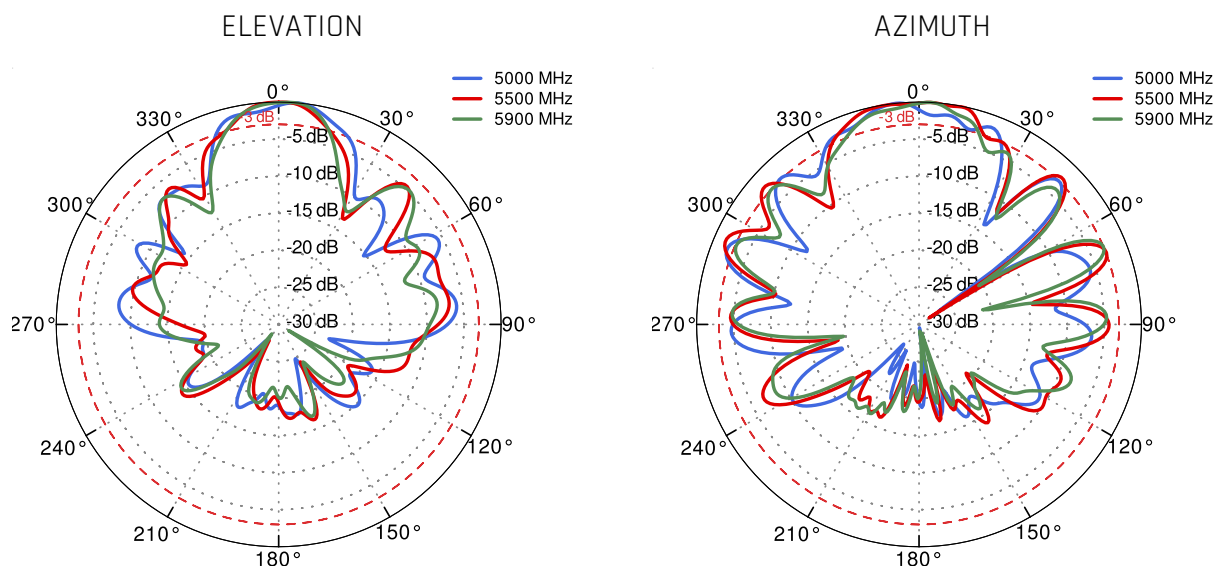


## PORT 2 - 5G/LTE from 650MHz to 950MHz

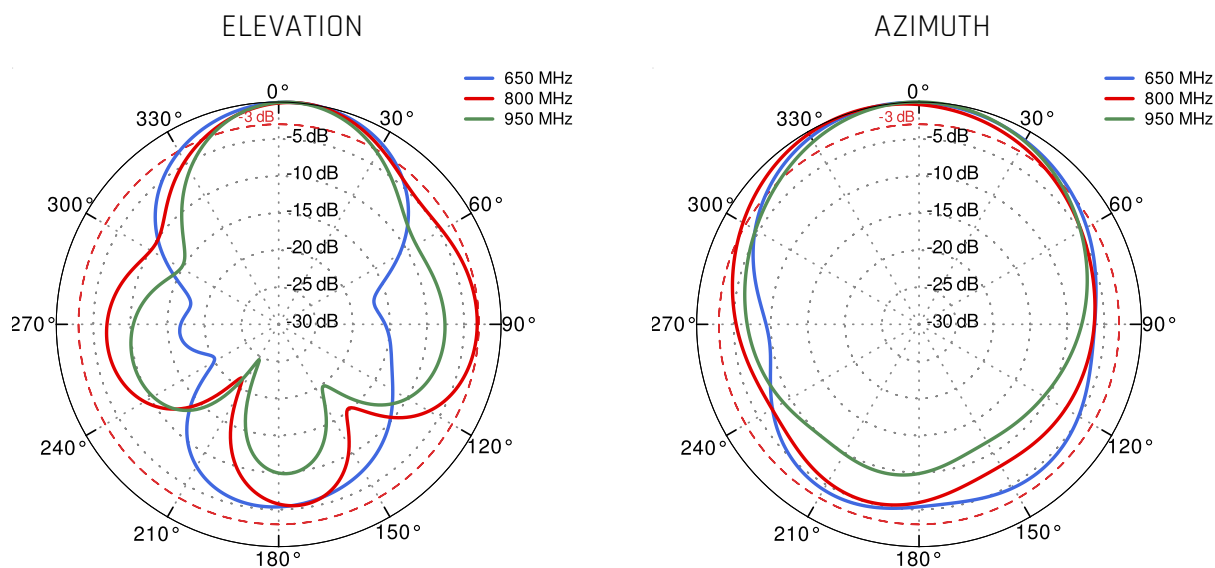


## PORT 2 - 5G/LTE from 1.71GHz to 2.17GHz

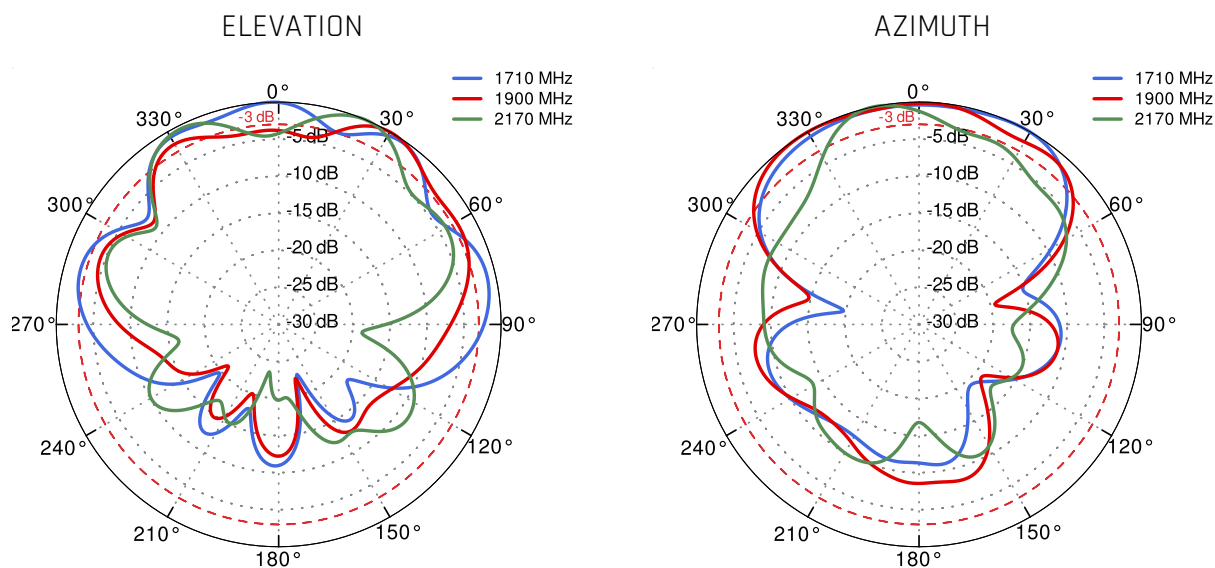

## PORT 2 - 5G/LTE from 2.3GHz to 2.7GHz

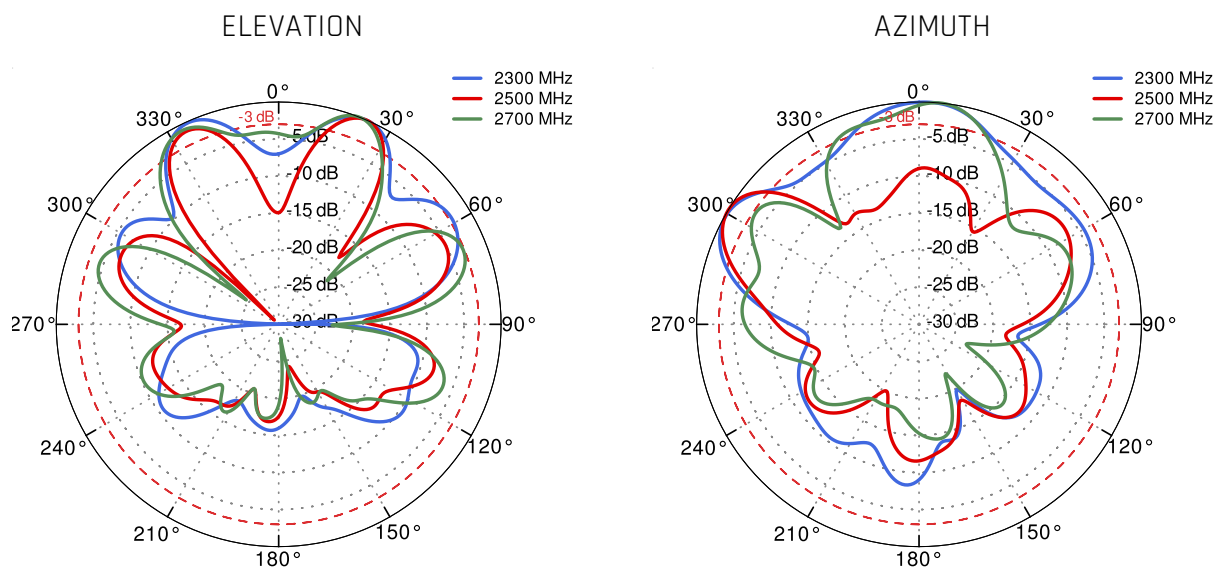


## PORT 2 - 5G/LTE from 3.3GHz to 3.8GHz

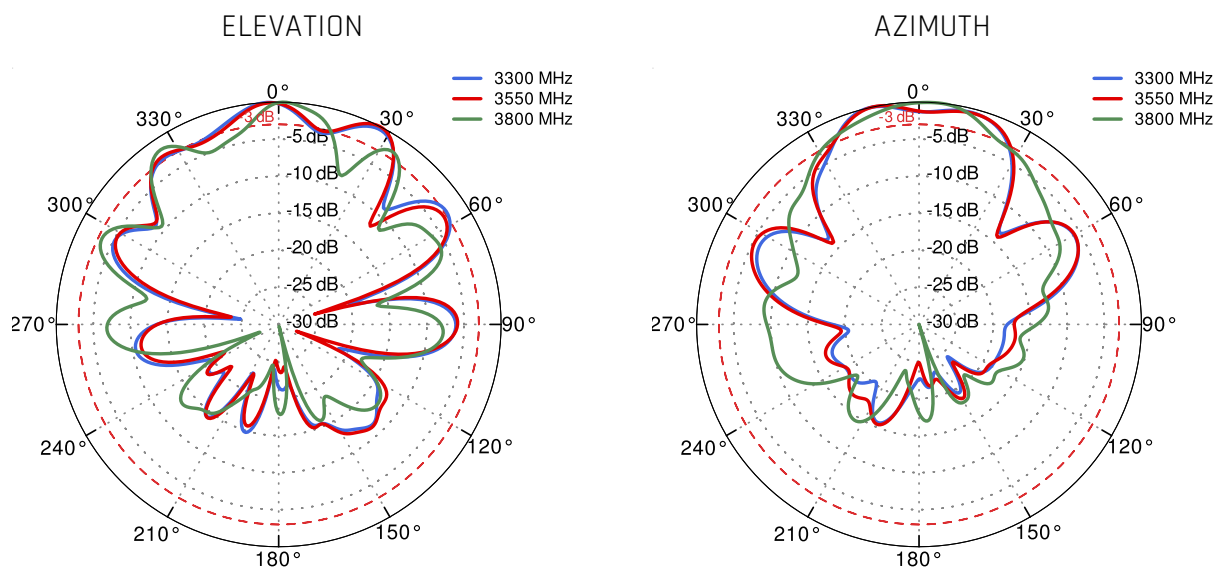




## PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

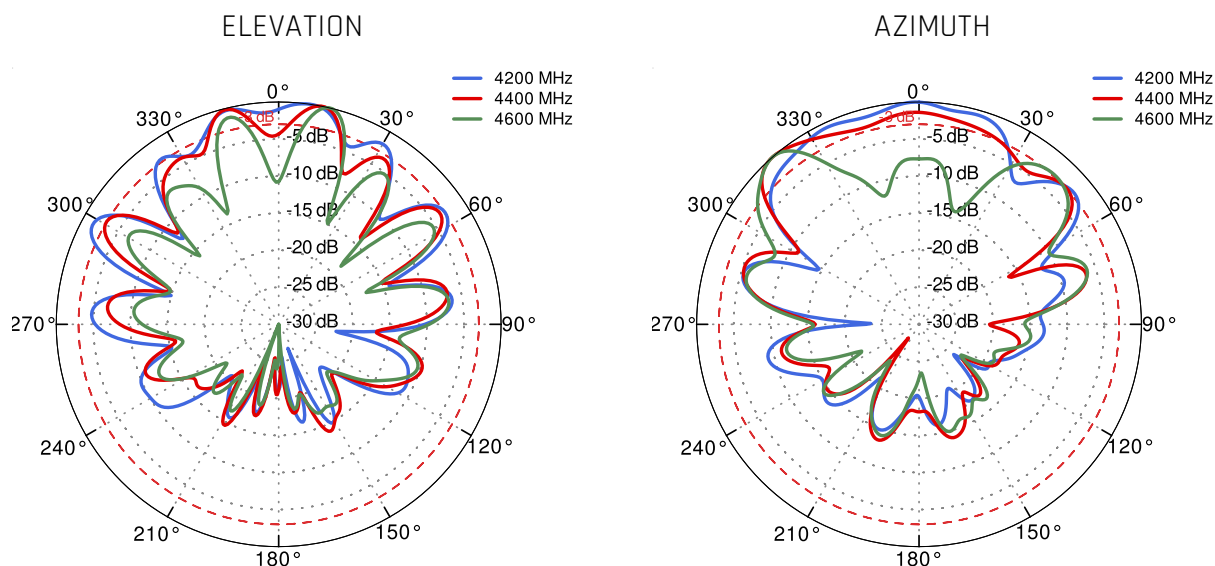


## PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

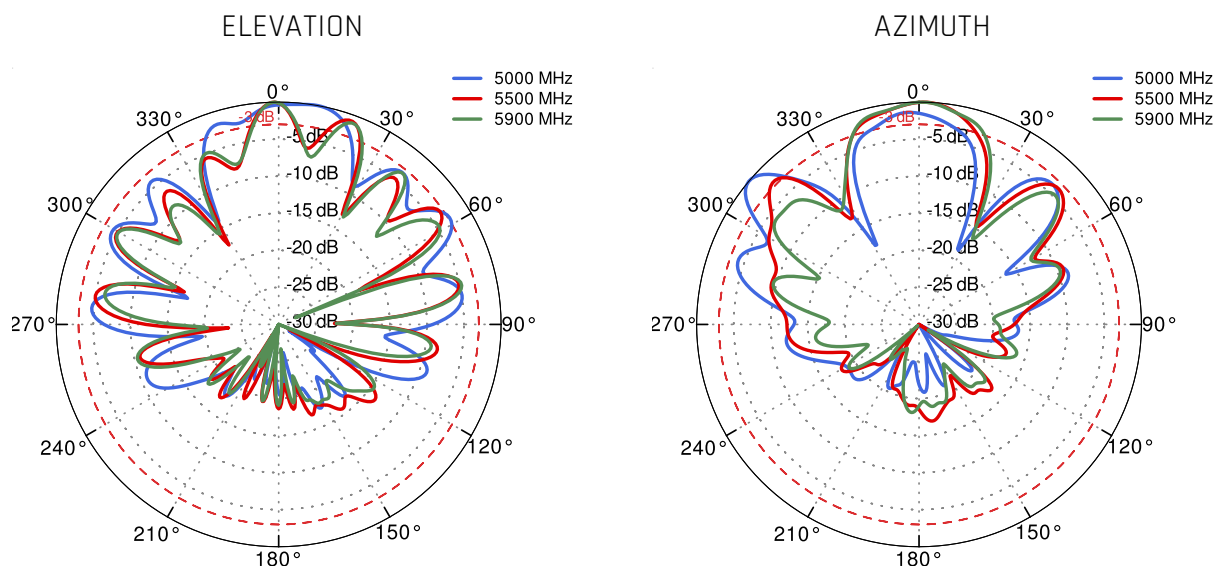



## Wi-Fi From 2.4 GHz to 6.5 GHz

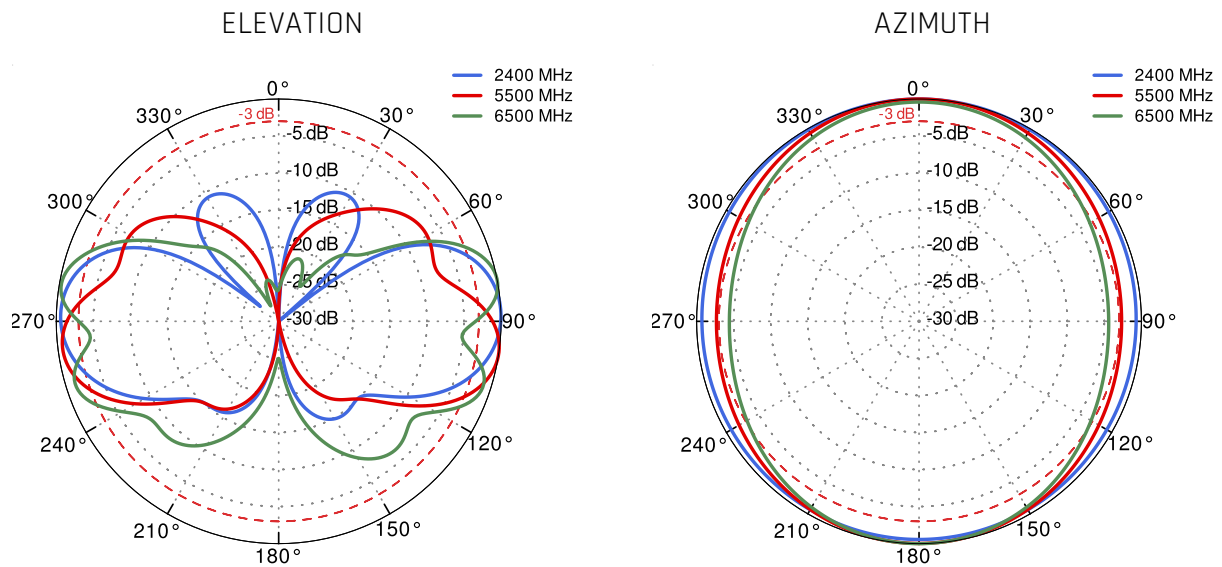

## DIMENSIONS

