

# QuOmni 5G/LTE MIMO 2x2, ver. US

## Omnidirectional ultra wideband 5G/LTE MIMO 2x2 antenna

QuOmni 5G/LTE omnidirectional MIMO 2x2 is ultra wideband LTE Outdoor antenna. It's primary designed for LTE/5G/3G/2G devices which require high efficiency connections. The antenna covers many LTE bands including the new Extended LTE Band 71, frequencies: 617 - 6000MHz. The mounting bracket allows the antenna to be installed on the buildings (on the pole or on the wall) as the client antenna or on the moving points like trains, buses, lorries, yachts, boats to receive Internet by LTE/5G/3G/2G. It's ideal solution to use with all industrial and domestic 2x2 LTE modems and routers like: Teltonika, DIGI, Mikrotik, Robustel, Cisco, etc.

**5G****BAND  
71****2x2 MIMO****617-6000MHz****4 dBi****OMNI  
DIRECTIONAL****IP 68****-40° TO +80°**

OUTDOOR ANTENNA WORKS IN **ANY  
WEATHER CONDITIONS**, IP68



GALVANIZED STEEL, WALL OR POLE  
MOUNTING BRACKET



TWO SMA CONNECTORS



360° BEAMWIDTH



4DBI GAIN



MADE IN **EUROPE**



## 5G / LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.71 - 2.7 GHz 3.3 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.71 - 2.7 GHz : 3.5 dBi 3.3 - 6.0 GHz : 4dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n48, n53, n65, n66, n67, n71, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	2x SMA plug
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
CABLE LENGTH	5m (P/N: A05G2U) or 10m (P/N: A05G2U-1)
CABLE TYPE	LMR195 white
MAST DIAMETER	25-66 mm 0.98-2.60 inch

# **FREQUENCY BANDS**

**LTE / 4G**

	1	2	3	4	5	7	8	
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
617 MHz	29	30	33	34	35	36	37	3800 MHz
	38	39	40	41	42	43	44	
	48	49	52	53	65	66	67	
	68	69	71	85	103	106		

**5G**

	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617 MHz	n48	n53	n65	n66	n67	n71	n78	3800 MHz
	n80	n81	n82	n83	n84	n85	n86	
	n89	n90	n95	n97	n98	n100	n101	
	n256							

## COMPATIBLE ROUTERS


VARIANTS: A05G2U, A05G2U-1

TELTONIKA	RUT200, RUT230, RUT240, RUT241, RUT260, RUT271, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUT976, RUTM09, RUTM11, RUTX09, RUTX11, TRB160
ROBUSTEL	EG5100, LG5100, R1500, R1510, R1511, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
ACKSYS	AirBox LTE, AirWan
ADVANTECH	ICR-2031
ANYBUS	Wireless Router WLAN
COMSET	CM210A-W, CM210Q-W, CM510Q-W, CM685T-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM820Q-4, CM820Q-6, CM820T-W, CM820V-4, CM820V-W
D-LINK	DWR-960, G415 AX1500, G416 AX1500, N300 4G
DIGI	6310-DX, 6330-MX, EX12, EX15, IX10, IX15, IX20, IX30, WR31
ERICSSON (CRADLEPOINT)	CBA550, E100, E102, IBR200, IBR600C, IBR900, L950, R500, R920, S400, S700
FORTINET	FEX-101F, FEX-201F, FEX-211E, FEX-212F, FortiGate Rugged 60F-3G4G, FortiGate Rugged 70F-3G4G
FOUR-FAITH	4G Cellular Router F-R100, 4G Industrial Computer F4931-R2H, 4G Industrial Computer F4932-R2H-DF1, Android Industrial Computer F4932-R1Q, Cellular Wireless Router F-R200, Dual Sim 4G Router F3X46, Dual-sim WiFi Router F3946, Edge Computing Gateway F-G100, Industrial WiFi Router F3X36Q, LAN Port Router F3X26 V2, LTE Industrial Router F3X27 V2, LTE Wireless Router F3x36


<b>INHAND</b>	IR302
<b>MIKROTIK</b>	RB912, RB922, RBM11G, RBM33G
<b>MILESIGHT</b>	UR32
<b>OPTION</b>	CloudGate LTE WW CAT4
<b>PEPLINK</b>	Balance 20X, Balance 310 5G, MAX BR1 Classic, MAX BR1 ENT, MAX BR1 IP55, MAX BR1 M2M, MAX BR1 Mini, MAX BR1 Mini (HW3), MAX BR1 Mini Core (HW3), MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Slim
<b>PROROUTE</b>	H685 4G Router, H685 LTE 4G CAT6 Router, H820 M2M 4G Router
<b>ROBUSTEL</b>	EG5100, LG5100, R1500, R1510, R1511, R1511P, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R2110, R3000, R3000 Industrial, R3000 LG, R3000 Lite, R3000 Quad, R3010
<b>SEMTECH (SIERRA WIRELESS)</b>	AirLink LX40, AirLink LX60, AirLink MP70, AirLink RV50X, AirLink RV55, AirLink RX55, RV55
<b>SIEMENS</b>	6GK5876-4AA00-2BA2, 6GK5876-4AA00-2DA2, 6GK5876-4AA10-2BA2
<b>TELTONIKA</b>	RUT200, RUT230, RUT240, RUT241, RUT260, RUT271, RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUT976, RUTM09, RUTM11, RUTX09, RUTX11, TRB160
<b>WAVETEL</b>	W2400 LTE , W3600 4G/LTE Dual WAN, W3604 Multi-WAN, W3608 Multi-WAN, W421, W4600, W4600-S2
<b>WLINK</b>	ER120, G200, G510, G520, R210, R220, R520
<b>ZYXEL</b>	LTE3202-M437, LTE3301-PLUS, LTE5388-M804, LTE5398-M904, NR5101
<b>OTHER</b>	2 * SMA, 3 * SMA

## PLOTS



VSWR

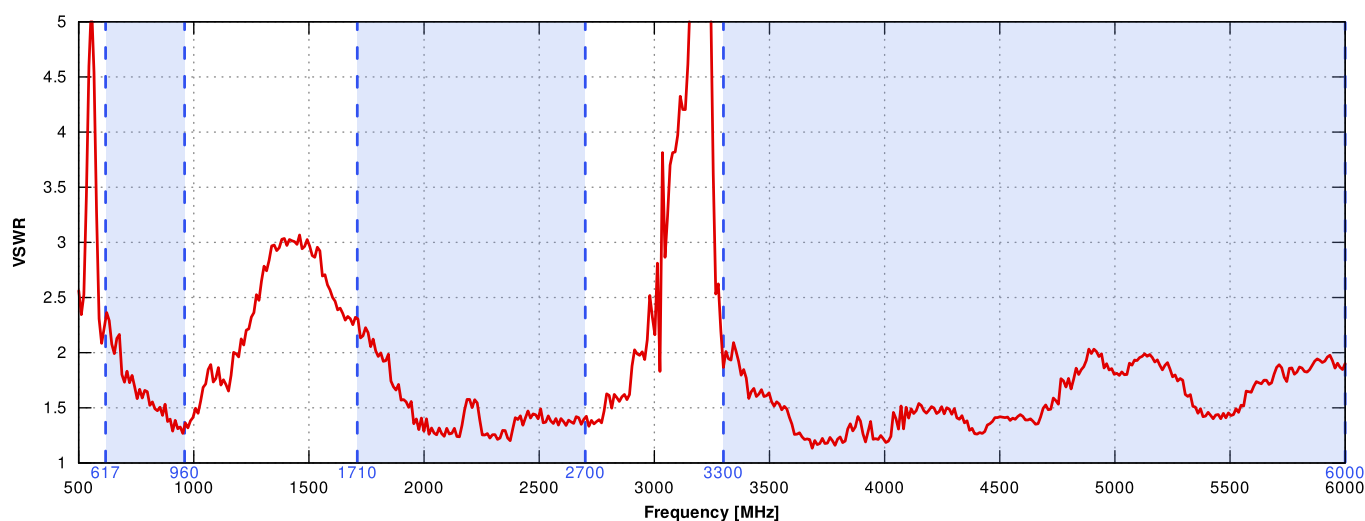



Gain

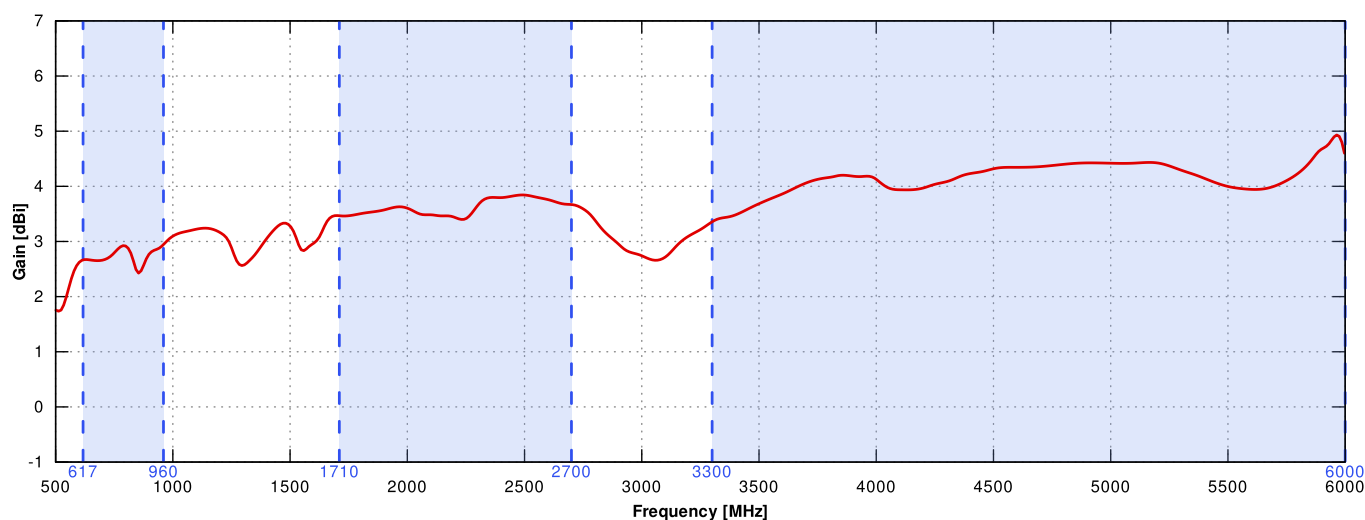



From 617MHz to 960MHz

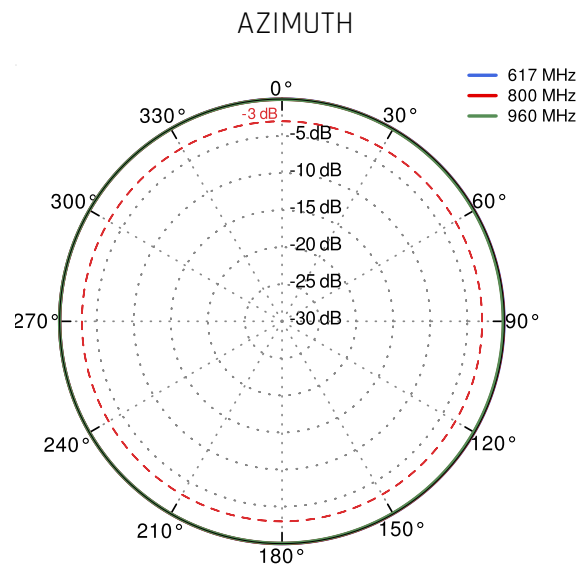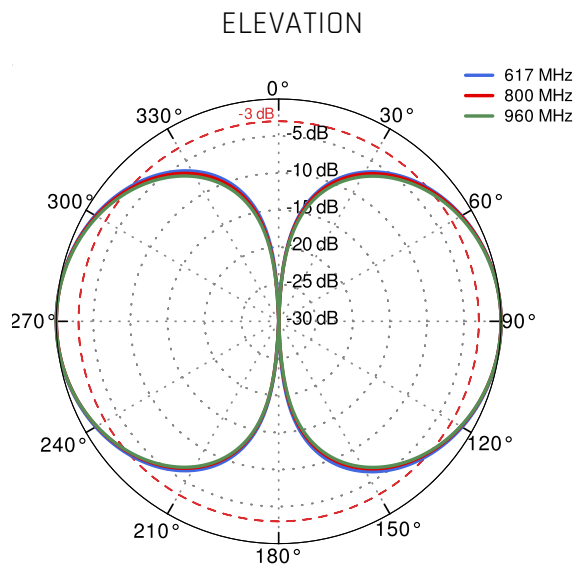



From 1.71GHz to 2.5GHz

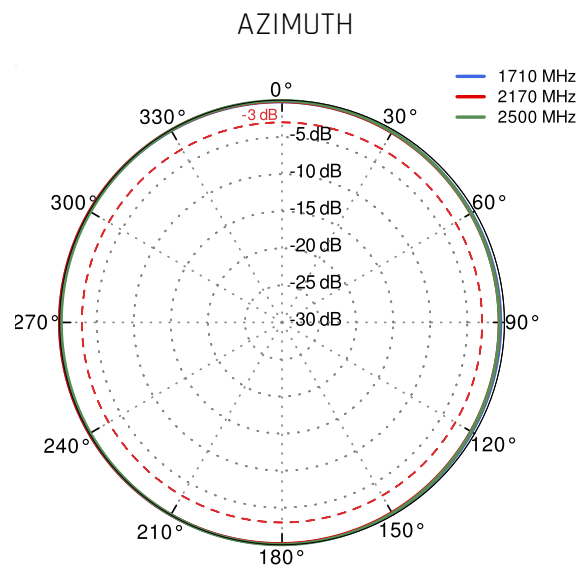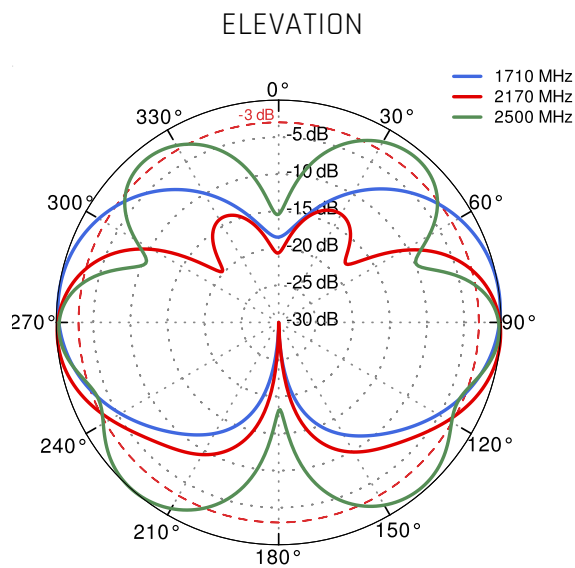

From 3.3GHz to 4.2GHz

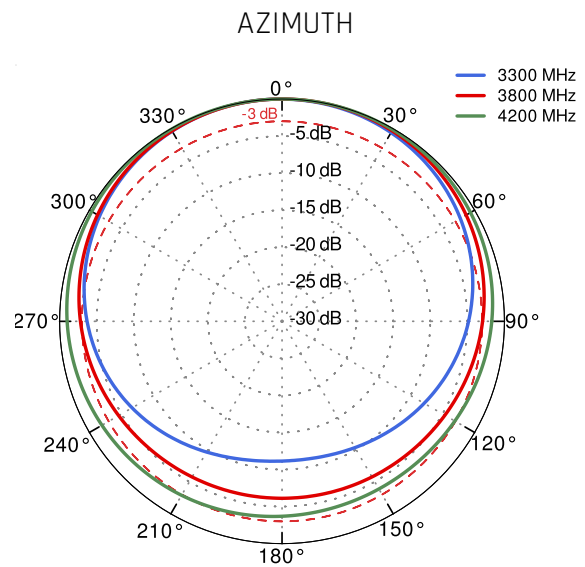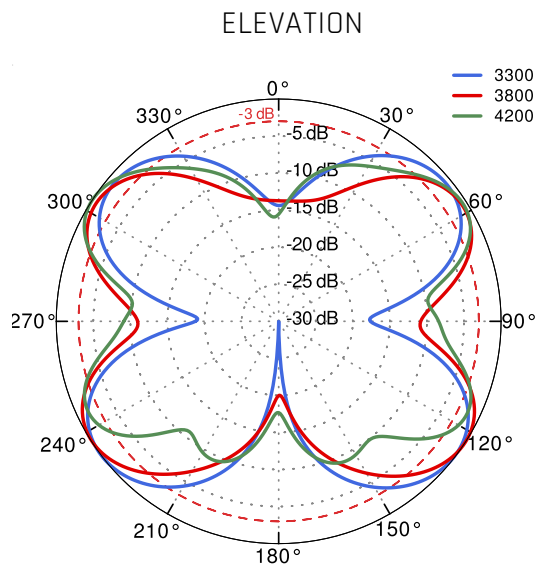

From 4.6GHz to 5.5GHz

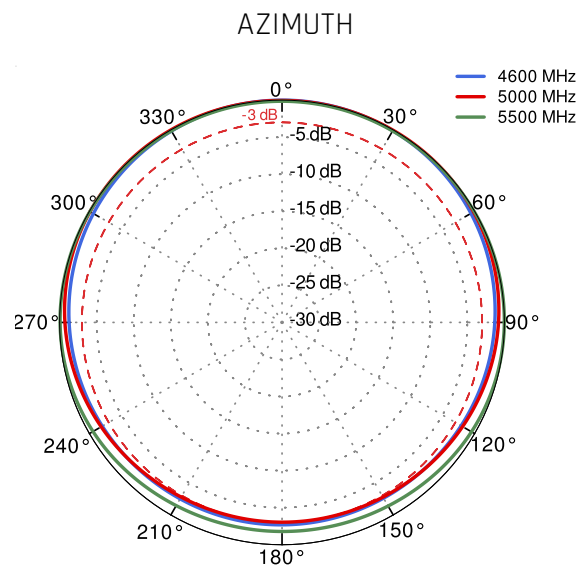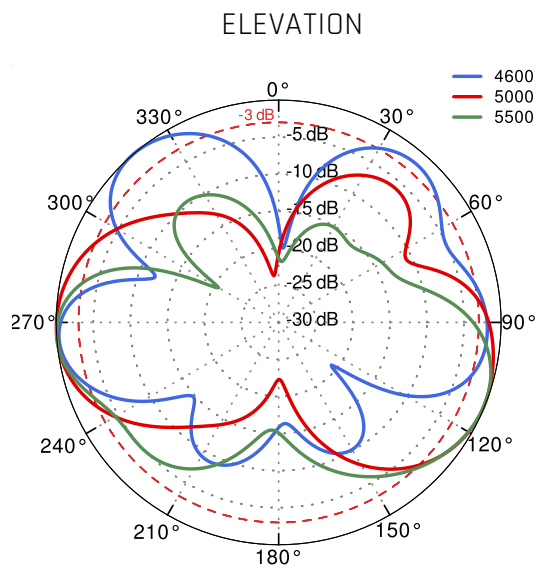

## DIMENSIONS

