

QuOmni LTE SISO

Omnidirectional multiband LTE SISO antenna

QuOmni LTE omnidirectional SISO LTE antenna working in Vertical polarization. It's desired for LTE/3G/2G connections. The antenna can be used for the most popular LTE bands (e.g. 3,7,20) and frequencies 694-2700 MHz. This antenna is predicted to be installed on the buildings (on the pole or on the wall) as a client antenna or on a moving points like trains, buses, lorries, yachts or boats to receive Internet by LTE/3G. Using SMA connectors makes it compatible with most LTE devices, like Teltonika: RUT230, TRB140, TRB141, TRB142, TRB145, TRM240, TRM250 and other SISO LTE/3G/2G modems and routers.

4G
LTE
SISO
694-2700MHz
4 dBi
**OMNI
DIRECTIONAL**
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67



GALVANIZED STEEL, WALL OR POLE
MOUNTING BRACKET



SMA CONNECTOR



360° BEAMWIDTH



4DBI GAIN



MADE IN EUROPE



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	1x SMA plug
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
CABLE LENGTH	5m (P/N: AOLS1) or 10m (P/N: AOLS1-1)
CABLE TYPE	LMR195 white
MAST DIAMETER	40-60 mm 1.57-2.36 inch

FREQUENCY BANDS

LTE / 4G GSM

	5	6	8	12	13	14	17	
617 MHz	18	19	20	26	27	28	29	960 MHz
	44	67	68	85	n81	n82	n83	
	n89							

LTE / 4G UMTS

	1	2	3	4	9	10	25	
1710 MHz	33	34	35	36	37	39	59	2170 MHz
	62	n80	n84	n86	n95			

LTE / 4G WCS DARS

2300 Mhz	30	40						2400 MHz
----------	----	----	--	--	--	--	--	----------

LTE / 4G

2400 MHz	7	38	41	53	69	n90		2700 MHz
----------	---	----	----	----	----	-----	--	----------


COMPATIBLE ROUTERS

VARIANTS: AOLS1, AOLS1-1


TELTONIKA	TRB140, TRB141, TRB142, TRB143, TRB145, TRB245, TRB246, TRB255, TRB256
ROBUSTEL	EG5101, M1000 MP, M1200
FORTINET	Industrial GPS Modem F7916
FOUR-FAITH	4G LTE WiFi Modem F2X16 V4, LoRa Router F8936-L, Sim Card WiFi Router F3X26Q, Wireless 4G LTE Router F3X26-TB, Wireless M-Bus Gateway F-R100WM
MILESIGHT	UR32L, UR32S, UR41
ROBUSTEL	EG5101, M1000 MP, M1200
SIEMENS	6GK7243-7KX30-0XE0, 6GK7243-7SX30-0XE0
TELTONIKA	TRB140, TRB141, TRB142, TRB143, TRB145, TRB245, TRB246, TRB255, TRB256
WAVETEL	WM21 4G Cat M/NB Modem
WLINK	M100, M303, R100, R200

PLOTS



VSWR

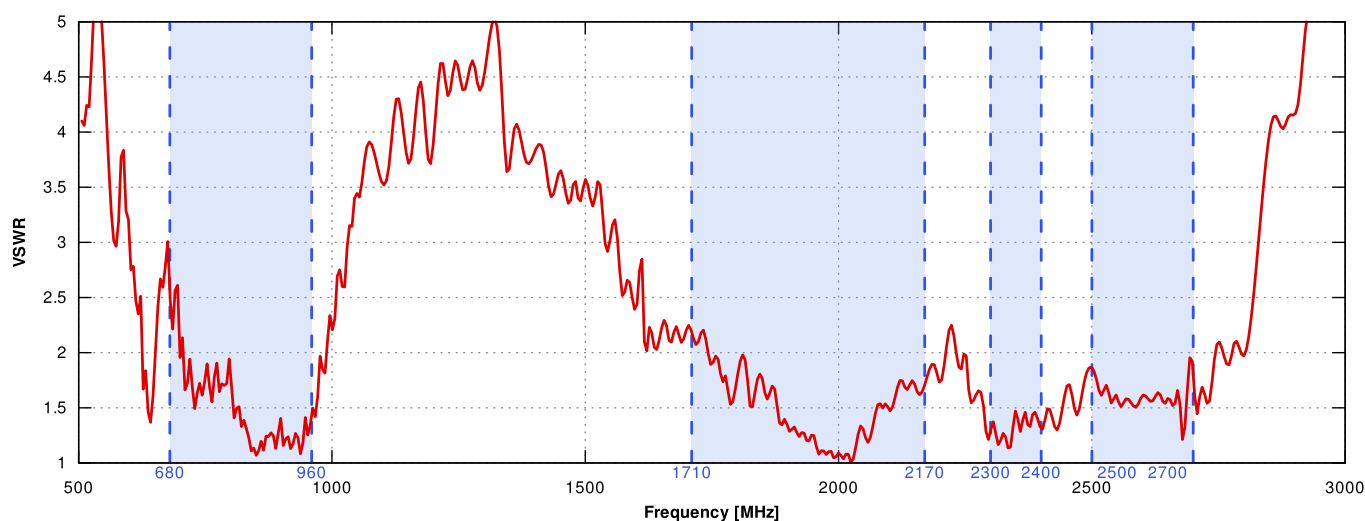



Gain

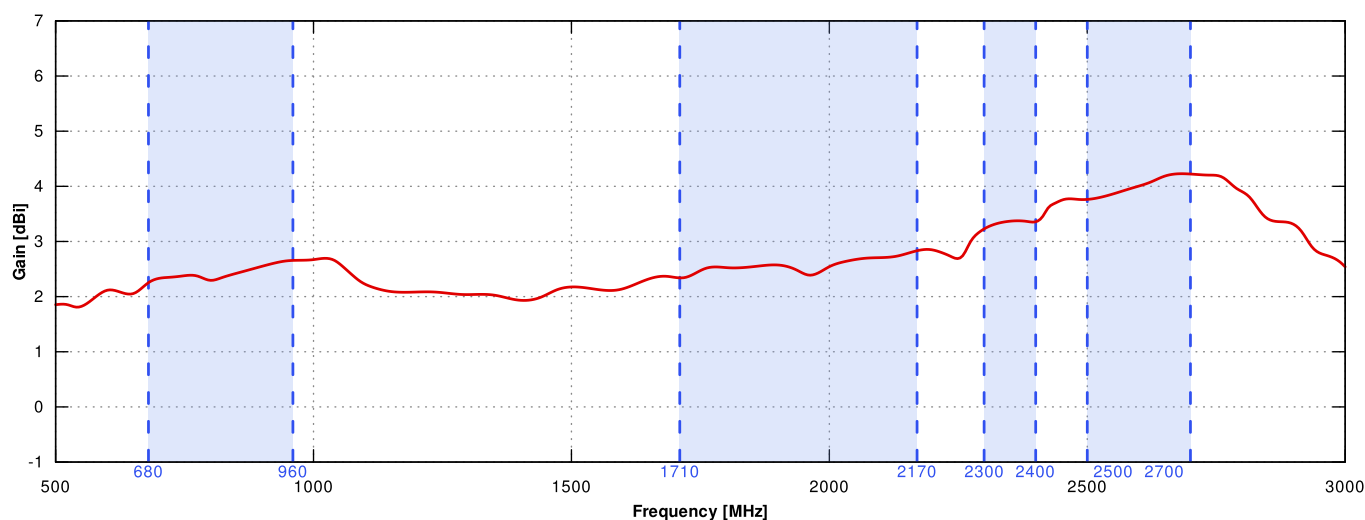



From 700MHz to 900MHz

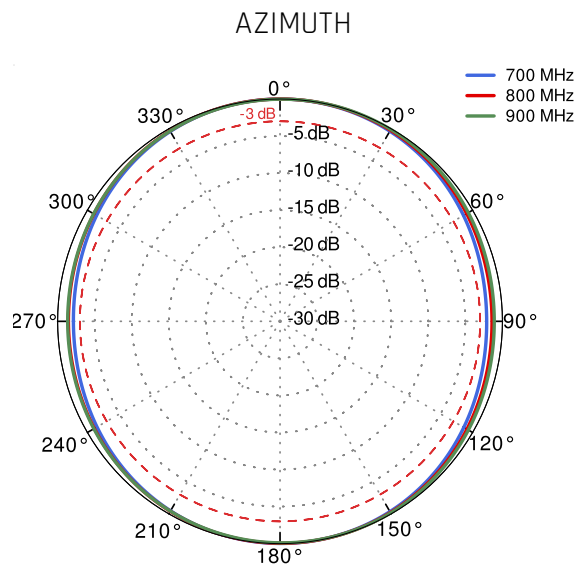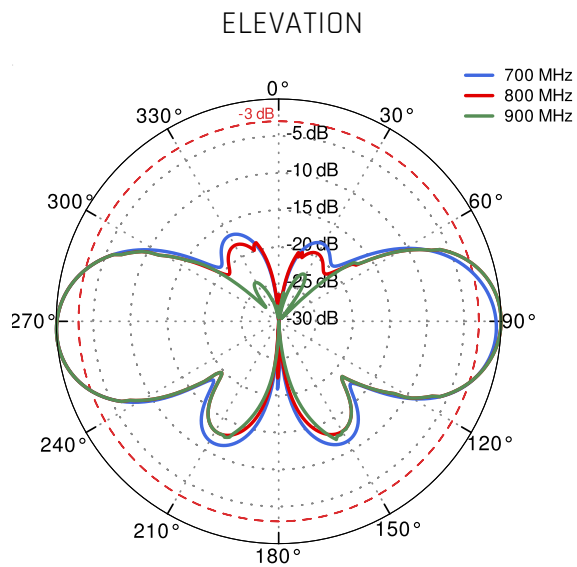

From 1.71GHz to 2.17GHz

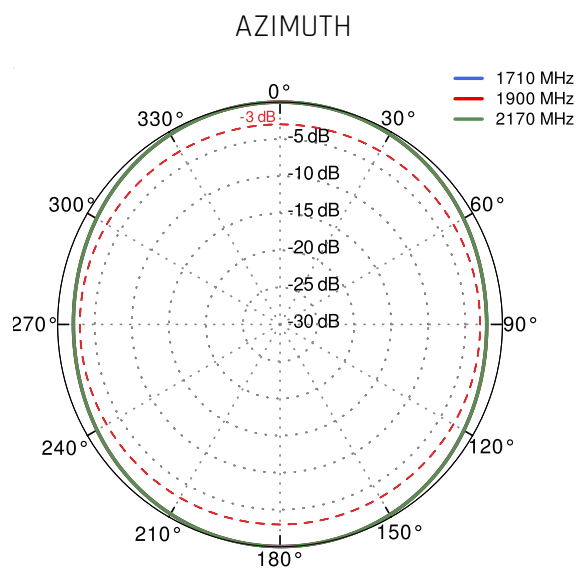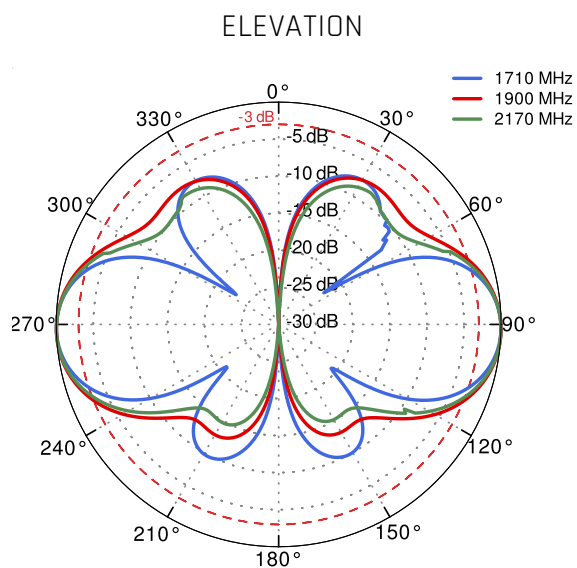

From 2.3GHz to 2.7GHz

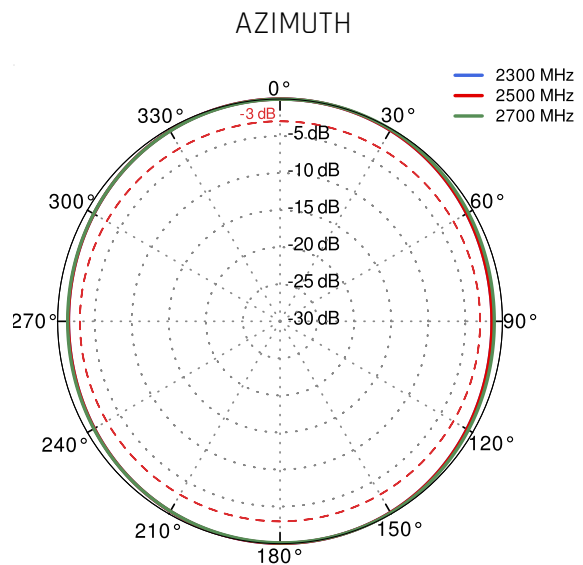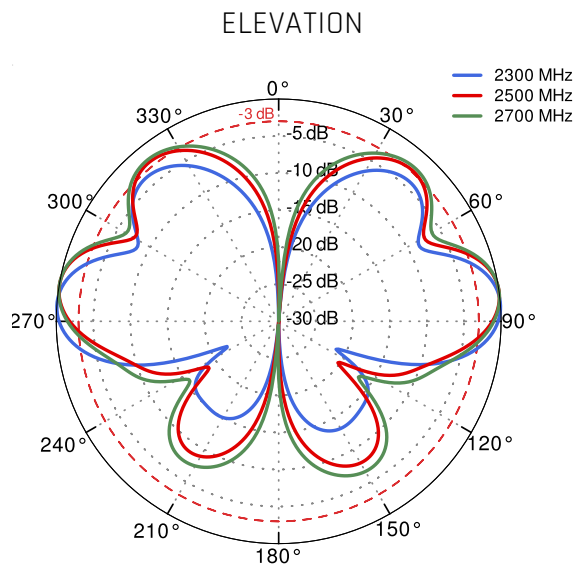

DIMENSIONS

