

# QuSector 14HV-30-4 Wi-Fi 6e

QuSector 14HV-30-4 Wi-Fi 6e offers a 30 degrees, 14dBi gain signal with two 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14HV-30-4 Wi-Fi 6e is a concurrent dual band, H&V polarity, MIMO 4x4 panel antenna. It operates at 2.4GHz and 5-7.125GHz simultaneously with 14dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. Wide frequency range (2.4-2.5GHz & 5.1-7.125GHz) helps to find suitable frequency for the most effective operation. The antenna comes with four 70cm (28inch) cables terminated with RPTNC, RPSMA or Nm connectors.

**Wi Fi 6E**  
2.4GHz + 5GHz  
6GHz + 7GHz  
14 dBi  
DIRECTIONAL  
IP 67  
-40° TO +80°  
4x4 MIMO

OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



WALL OR MAST MOUNTING SYSTEM  
WITH **TWO PLANES, 60 DEGREES**  
REGULATION



MADE IN **EUROPE**



## WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5GHz 5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	30°/30°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 $\Omega$
SEPARATION BETWEEN CONNECTORS	>25dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

## MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xRPSMA/4xNM/4xRPTNC
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

## COMPATIBLE ROUTERS

VARIANT: S14HV.30.4RS

ADTRAN	Bluesocket 1925
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-634, IAP-314, IAP-324, IAP-334
CISCO	Catalyst IW9165E
COMSET	CM770W-6
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENS620EXT, ESW850
EXTREME NETWORKS	AP 305Cx, AP 8533, AP3000X, AP310e

<b>FORTINET</b>	AP1020E, AP822E, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
<b>HUAWEI</b>	AP6150DN
<b>JUNIPER NETWORKS</b>	AP41E
<b>MIKROTIK</b>	L23UGSR-5HaxD2HaxD, RB912
<b>MIST</b>	AP32E, AP41E, AP43E, AP61E
<b>PEPLINK</b>	Balance 310 fiber 5G, MAX HD2, MAX HD4
<b>WAVETEL</b>	W3604 Multi-WAN, W3608 Multi-WAN
<b>WLINK</b>	G930
<b>OTHER</b>	4 * RPSMA

## VARIANT: S14HV.30.4NM

<b>RAJANT</b>	BreadCrumb ES1-5050CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
<b>AEROHIVE NETWORKS</b>	AP1130
<b>ARISTA</b>	O-105E
<b>CISCO</b>	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-CAP1532E, Catalyst 9163E, IW3702-2E, IW3702-4E, IW6300, MR74, MR76, MR84, MR86
<b>D-LINK</b>	DWL-8710AP
<b>EXTREME NETWORKS</b>	AP 360E, AP 3965E


<b>FORTINET</b>	FAP-222C
<b>HUAWEI</b>	AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
<b>PEPLINK</b>	AP Pro AX
<b>RAJANT</b>	BreadCrumb ES1-5050CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2455D, Hawk BreadCrumb FE1-4950, Hawk BreadCrumb® FE1-5050 / FE1-5050A, Peregrine BreadCrumb® FE1-2255B, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-5050CS
<b>RUCKUS</b>	T750SE
<b>SIEMENS</b>	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0
<b>XIRRUS</b>	XH2-120
<b>OTHER</b>	4 * N-male

## VARIANT: S14HV.30.4RT


<b>CISCO</b>	AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802I, AIR-AP3802P, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, MR42E, MR46E, MR53E
<b>OTHER</b>	4 * RPTNC

## PLOTS



VSWR

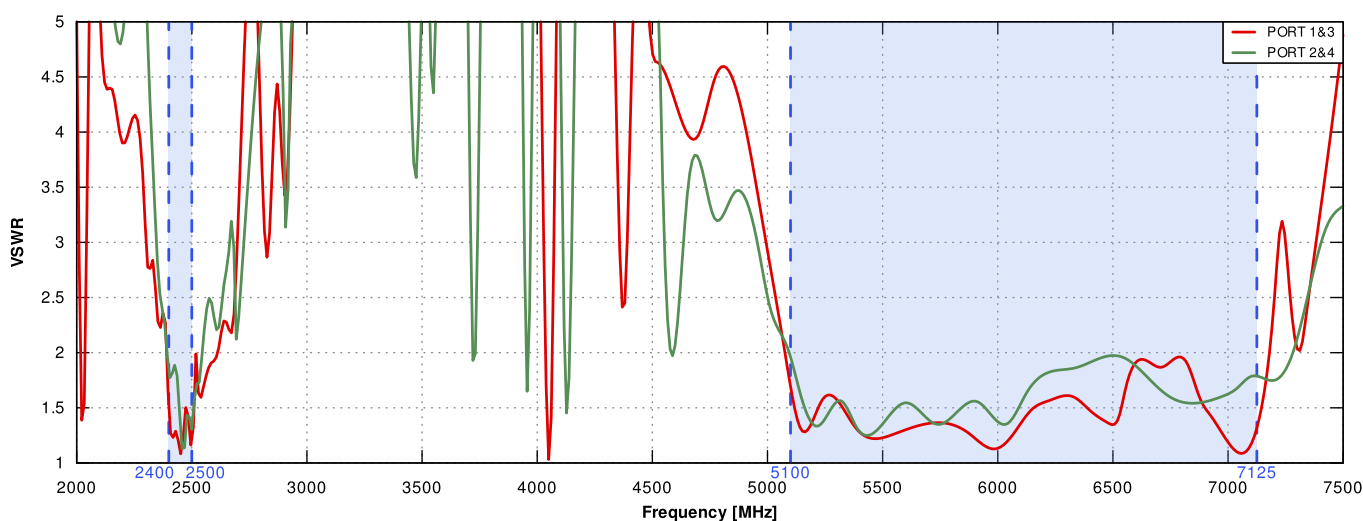



Gain

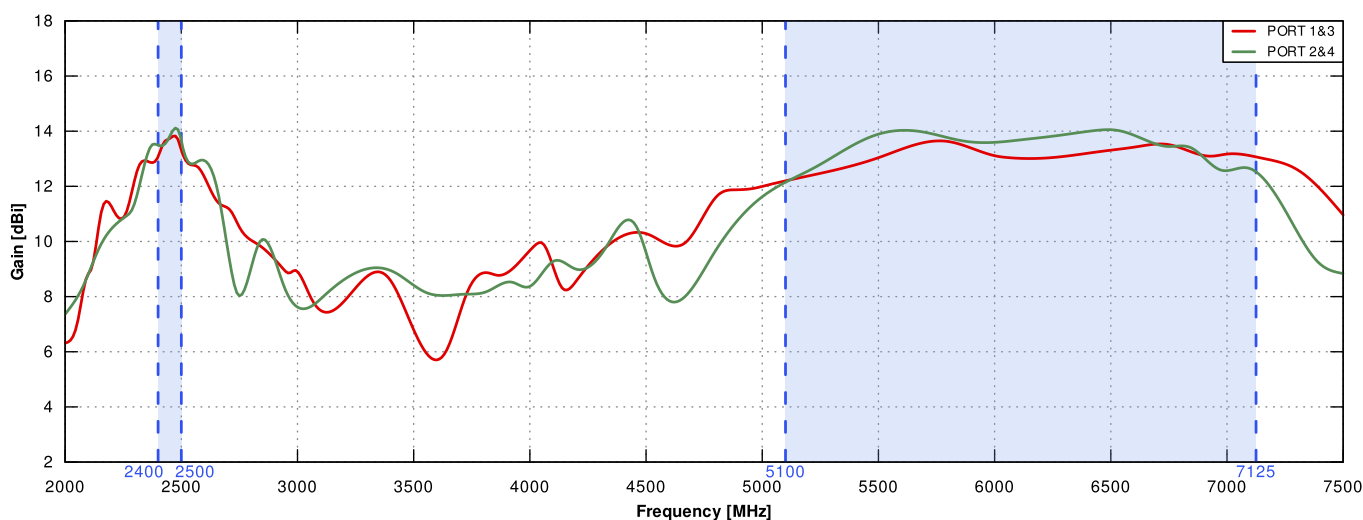


## PORT 1, 3 from 2.4GHz to 2.5GHz

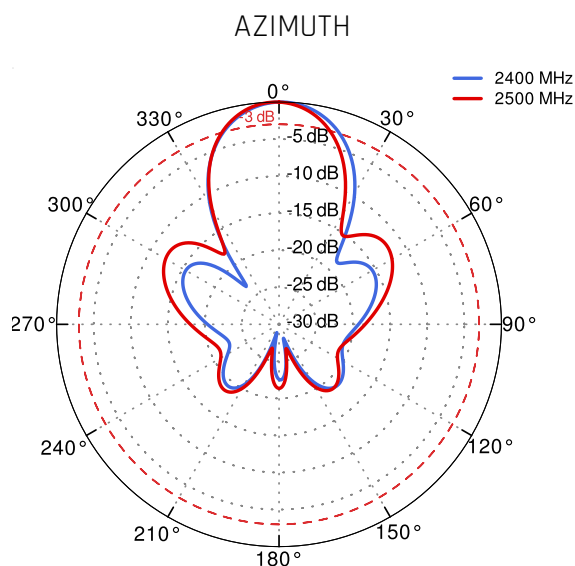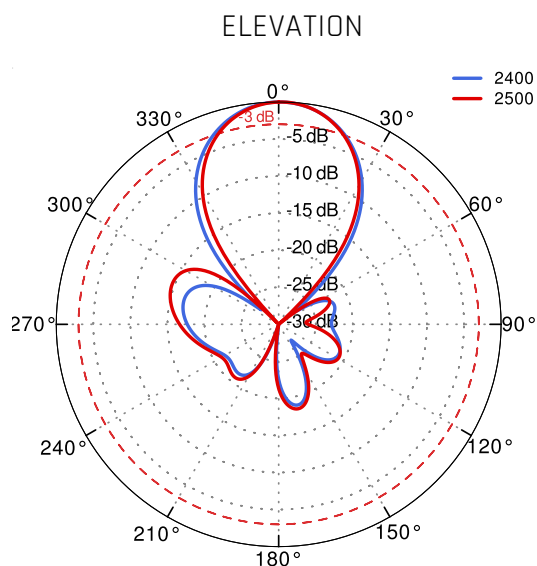


## PORT 1, 3 from 5.1GHz to 6.9GHz

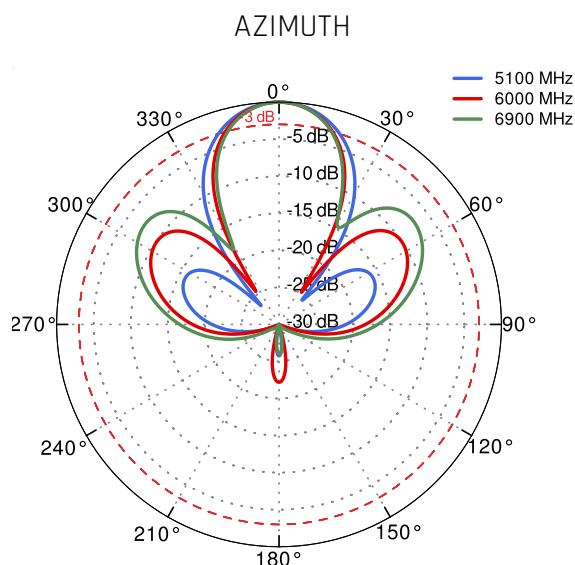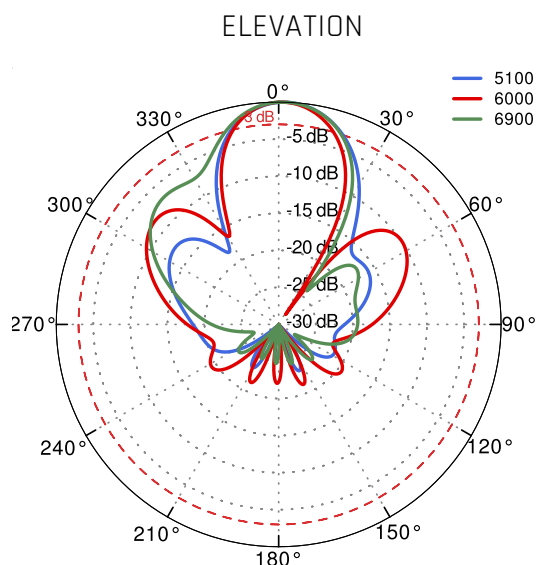

## PORT 2, 4 from 2.4GHz to 2.5GHz

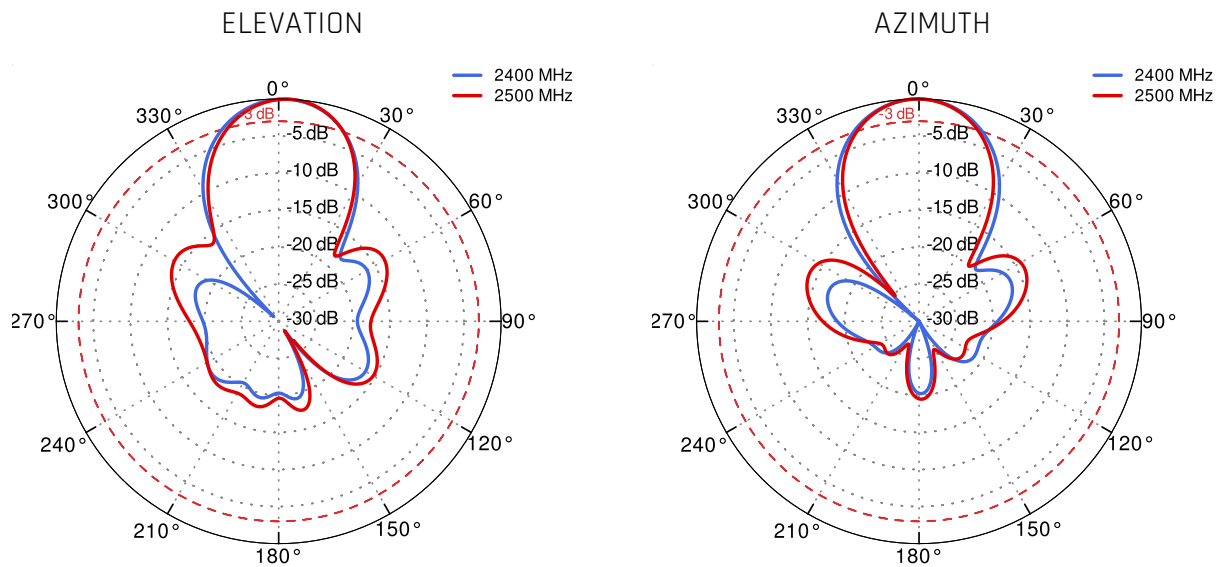

## PORT 2, 4 from 5.1GHz to 6.9GHz

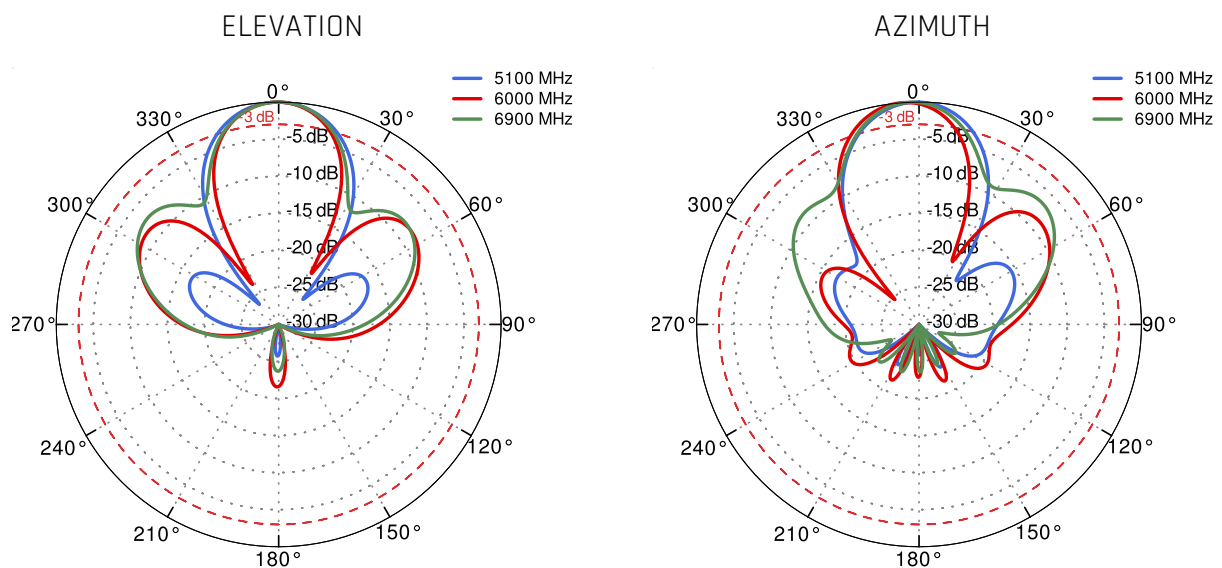



## DIMENSIONS

