

QuSpot for Rajant Cardinal

Integrated multi-band WiFi omni antenna + place to install Rajant Cardinal (All-in-one)

The QuSpot for Rajant Cardinal (AG1) is a rugged, all-in-one omnidirectional Wi-Fi antenna built for demanding industrial, automation, agriculture, and logistics environments.

This IP67-rated ABS enclosure protects an electronics compartment and houses high-gain (7dBi) Wi-Fi antennas with MIMO 4x4 capability, ensuring strong, reliable connectivity across diverse applications. Equipped with an RJ45 Ethernet port and flexible mounting options for poles, walls, or masts, the QuSpot is designed to withstand harsh outdoor conditions.

Its complete integrated design simplifies deployment, providing a reliable and efficient connectivity solution in demanding, high-performance settings.

 **Wi-Fi 6E** **7 dBi** **OMNI
DIRECTIONAL** **IP 68** **-40° TO +80°**

OUTDOOR ANTENNA WORKS IN **ANY
WEATHER CONDITIONS**, IP68




ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



WALL OR MAST MOUNTING SYSTEM



MADE IN **EUROPE**

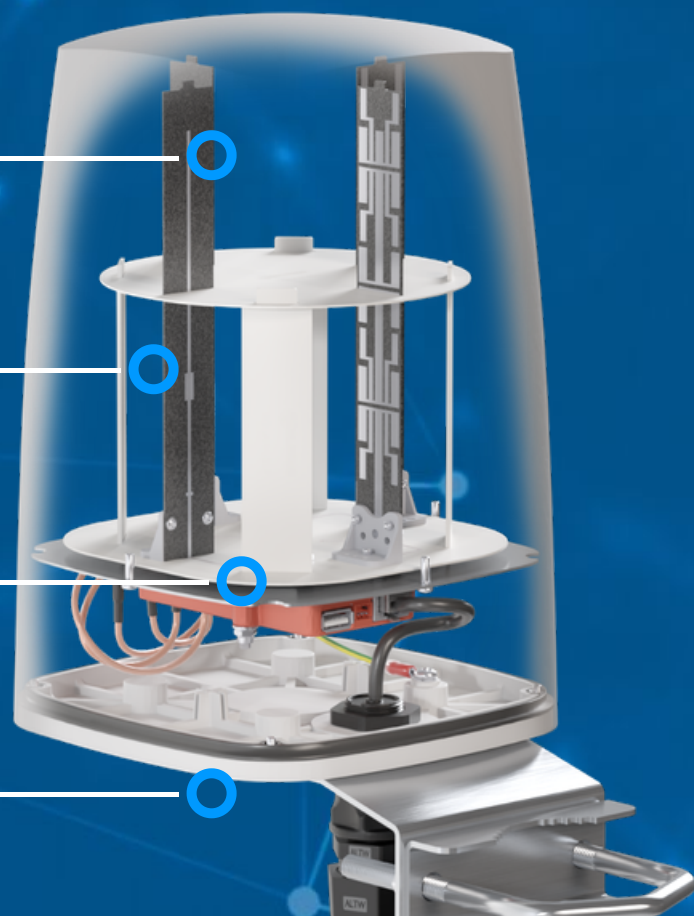

WI-FI ANTENNA SPECIFICATION

| | |
|--------------|--|
| FREQUENCY | 2.40 - 2.50 GHz 5.0 - 7.125 GHz |
| GAIN | 2.40 - 2.50 GHz : 6 dBi 5.0 - 7.125 GHz : 7.5 dBi |
| VSWR | <1.70, max <2.00 |
| BEAMWIDTH | 360°/25° ±5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

MECHANICAL SPECIFICATION

| | |
|-----------------------|---|
| MATERIALS | ABS, aluminum, PTFE |
| CONNECTOR TYPE | RJ45 |
| INGRESS PROTECTION | IP68 |
| DIMENSIONS | 160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch |
| WEIGHT | 1.5 kg 3.31 lbs |
| OPERATING TEMPERATURE | From -40°C to 80°C From -40°F to 176°F |
| MAST DIAMETER | 40-60 mm 1.57-2.36 inch |

FREQUENCY BANDS

LTE / 4G GSM

| | | | | | | | | |
|------------|-----|-----|----|-----|-----|-----|-----|------------|
| 617 MHz | 5 | 8 | 12 | 13 | 14 | 17 | 18 | 960 MHz |
| | 19 | 20 | 26 | 27 | 28 | 29 | 44 | |
| | 67 | 68 | 85 | 103 | n81 | n82 | n83 | |
| | n89 | 100 | | | | | | |

LTE / 4G UMTS

| | | | | | | | | |
|-------------|-----|-----|-----|-----|------|----|-----|-------------|
| 1710 MHz | 1 | 2 | 3 | 4 | 9 | 10 | 25 | 2170 MHz |
| | 33 | 34 | 35 | 36 | 37 | 39 | n80 | |
| | n84 | n86 | n95 | n98 | n101 | | | |

LTE / 4G WCS DARS


| | | | | | | | | |
|-------------|----|----|-----|--|--|--|--|-------------|
| 2300 MHz | 30 | 40 | n97 | | | | | 2400 MHz |
|-------------|----|----|-----|--|--|--|--|-------------|

LTE / 4G


| | | | | | | | | |
|-------------|---|----|----|----|----|-----|--|-------------|
| 2400 MHz | 7 | 38 | 41 | 53 | 69 | n90 | | 2700 MHz |
|-------------|---|----|----|----|----|-----|--|-------------|

PLOTS


VSWR for Wi-Fi antenna

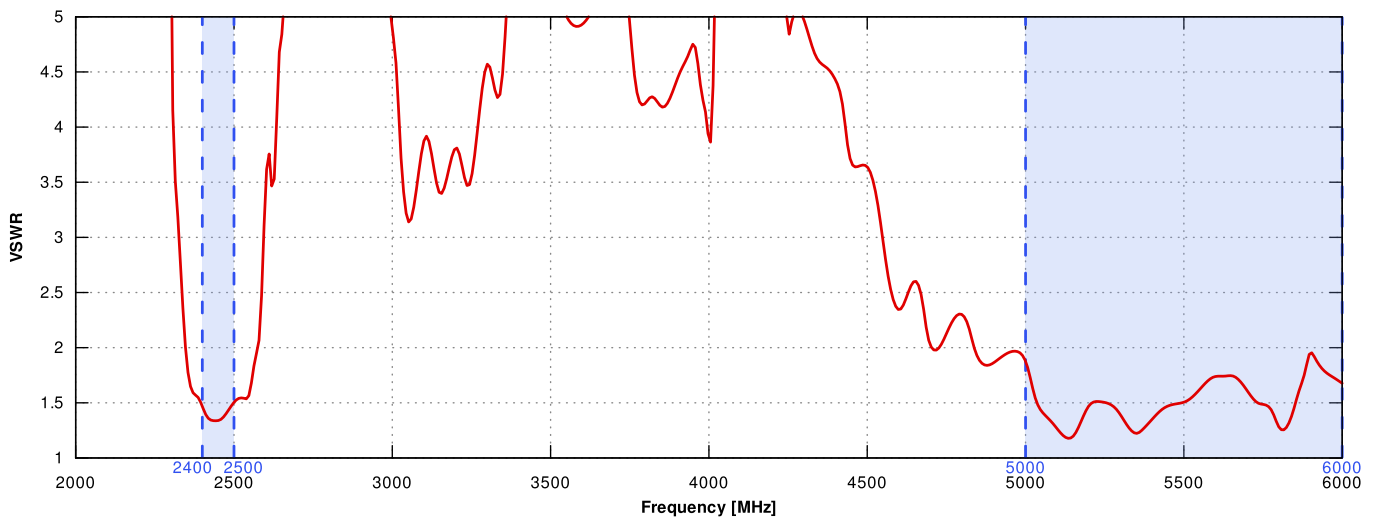

Gain for Wi-Fi antenna

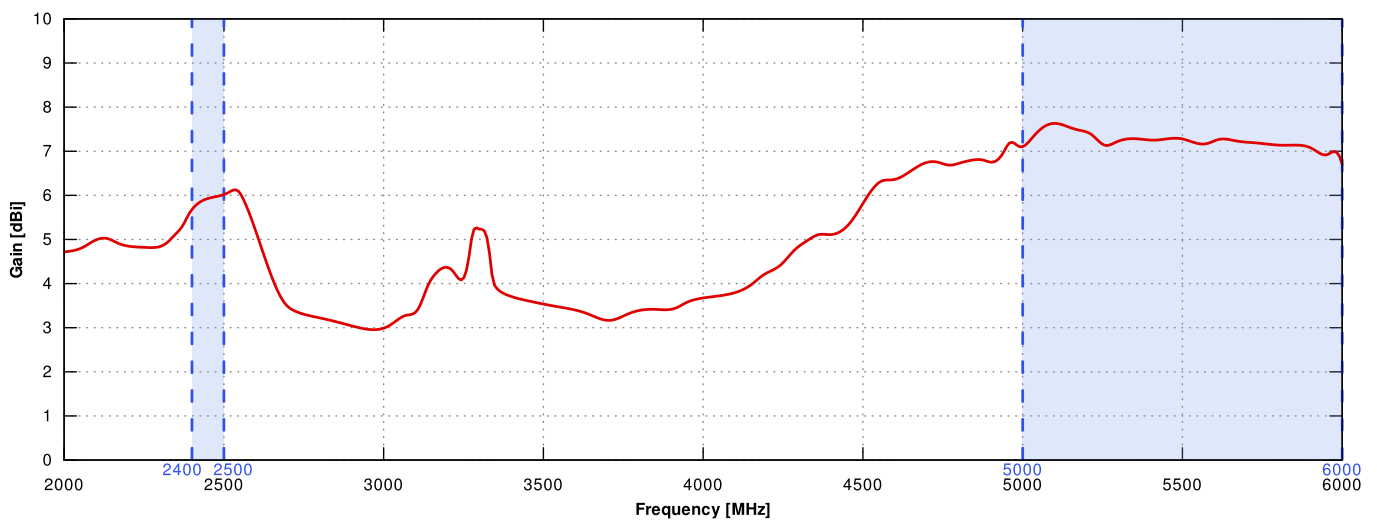

Wi-Fi 2.4 GHz and 5 GHz and 6GHz

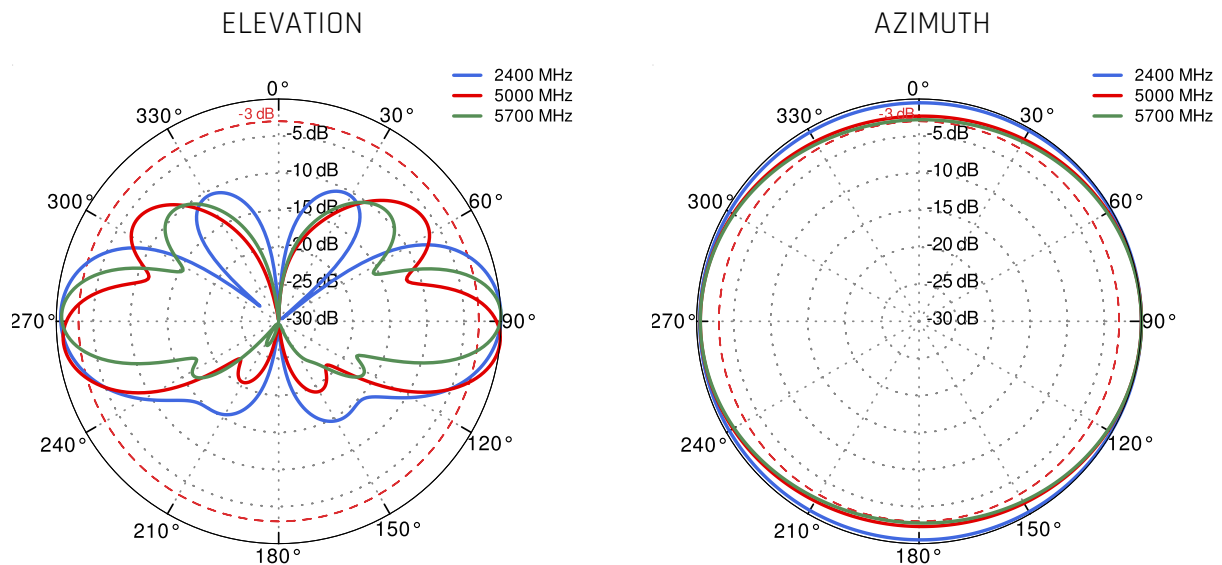

DIMENSIONS

