

QuSpot for RUT2xx ver. US (Band71)

Integrated multi-band LTE omni antenna ver. US + WiFi omni antenna + place to install Teltonika RUT241, RUT240 or 230 (All-in-one)

QuSpot omnidirectional LTE antenna ver. US for Teltonika **RUT260, RUT241, RUT240, RUT230 or RUT200 routers** is a perfect outdoor device for mobile and fixed installations e.g. CCTV, hotspots, industrial areas, campervans, ships etc.. In addition to having omnidirectional, multi-band LTE antennas, **it has also embedded omnidirectional Wi-Fi antenna**. If you use RUT2xx with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

4G

LTE

B
A
N
D
71

617-3800MHz

Wi Fi 2.4GHz

4 dBi

OMNI
DIRECTIONAL


IP 67



-40° TO +80°

OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP67ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER

WALL OR MAST MOUNTING SYSTEM

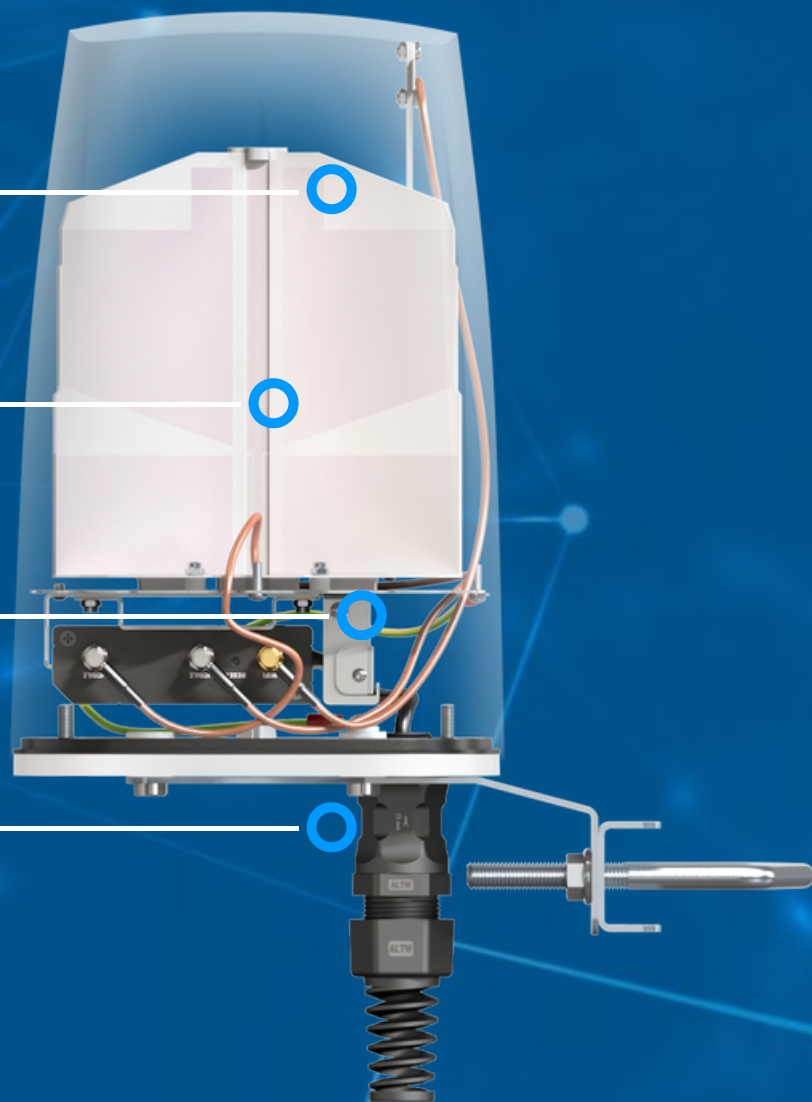MADE IN **EUROPE**

LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.2 GHz 2.3 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 3.5 dBi 2.3 - 2.7 GHz : 3.5 dBi 3.3 - 3.8 GHz : 4dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	2x SMA
CABLE TYPE	RG316

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz
GAIN	6 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	1x RPSMA
CABLE TYPE	RG316

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	40-60 mm 1.57-2.36 inch

FREQUENCY BANDS

LTE / 4G GSM

694 MHz	5	8	12	13	14	17	18	960 MHz
	19	20	26	27	28	29	44	
	67	68	85	103	n81	n82	n83	
	n89	100						

LTE / 4G UMTS

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	n80	
	n84	n86	n95	n98	n101			

LTE / 4G WCS DARS


2300 MHz	30	40	n97					2400 MHz
-------------	----	----	-----	--	--	--	--	-------------

LTE / 4G


2400 MHz	7	38	41	53	69	n90		2700 MHz
-------------	---	----	----	----	----	-----	--	-------------

PLOTS


VSWR for Wi-Fi antenna 

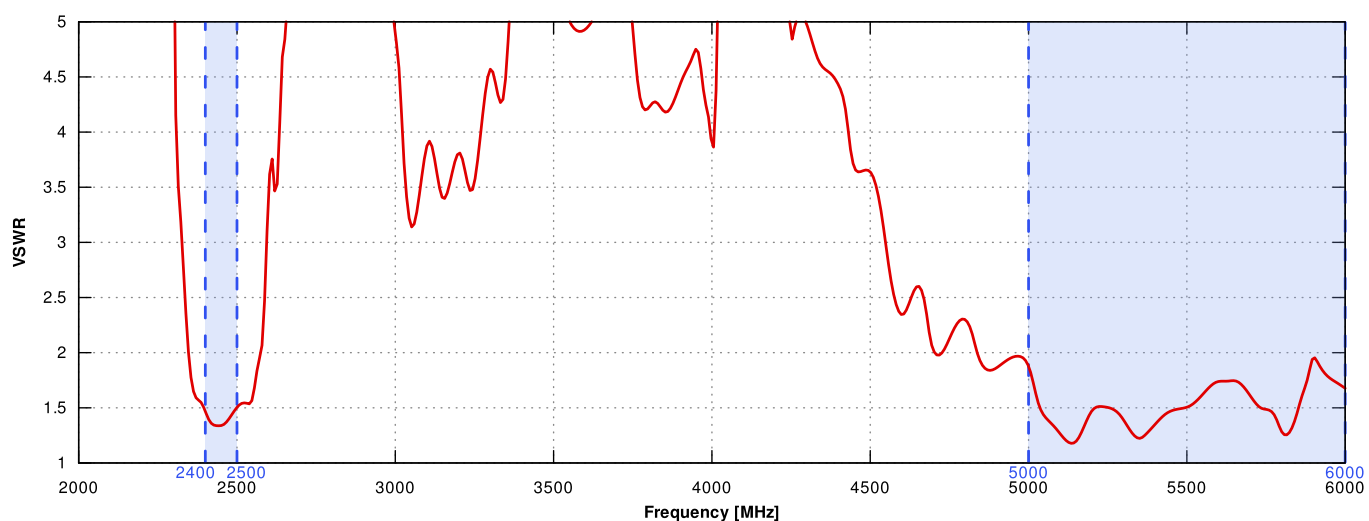


VSWR for LTE antenna 

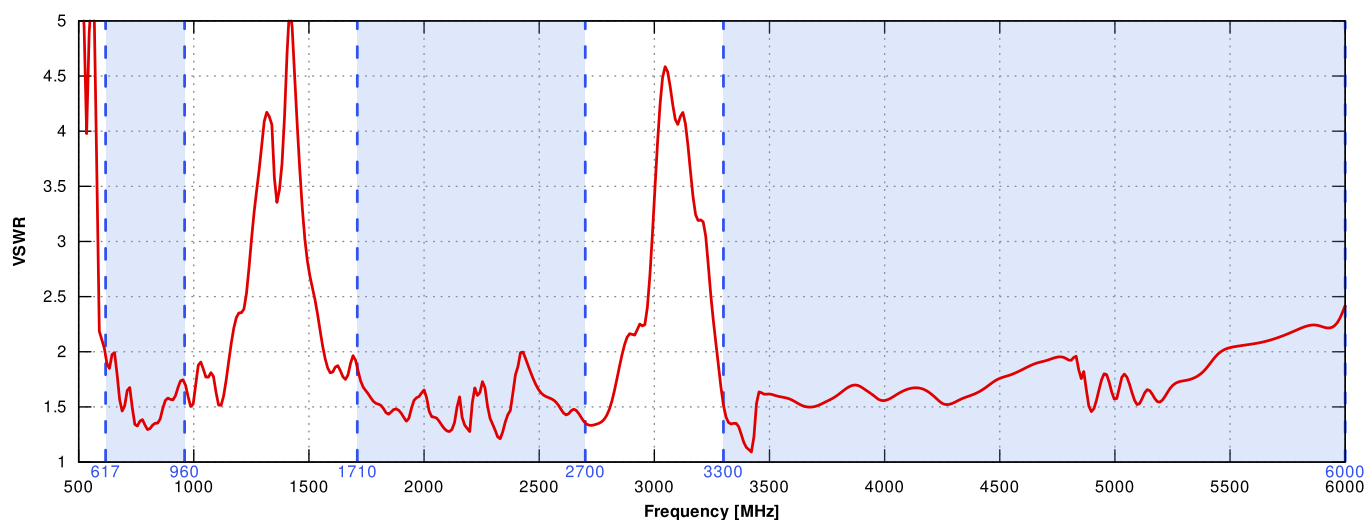


Gain for Wi-Fi antenna

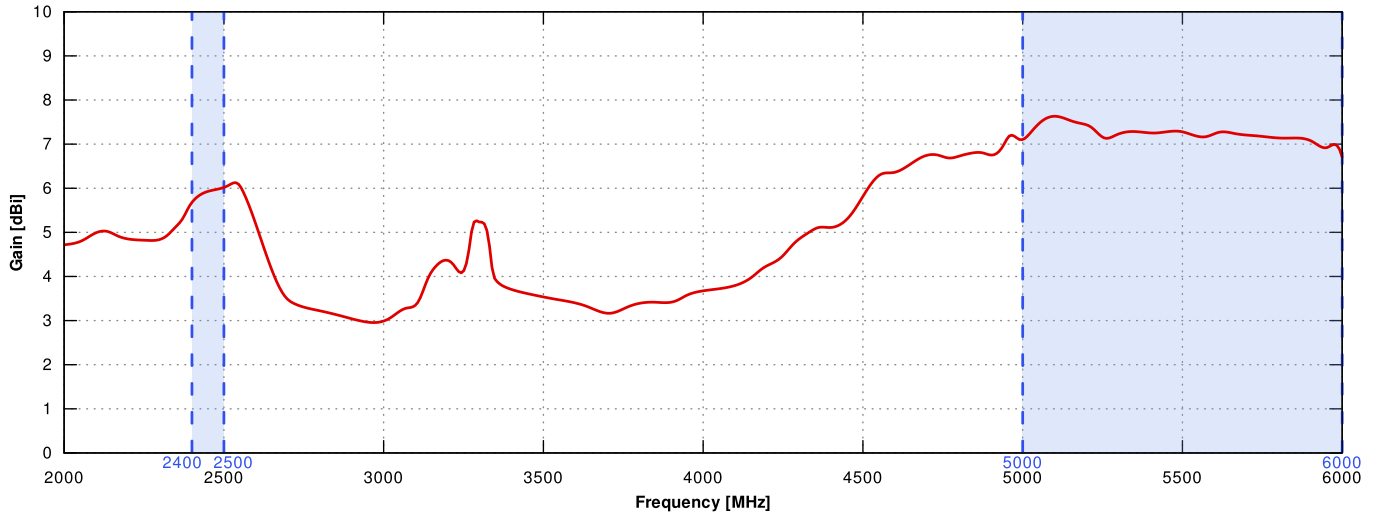


Gain for LTE antenna

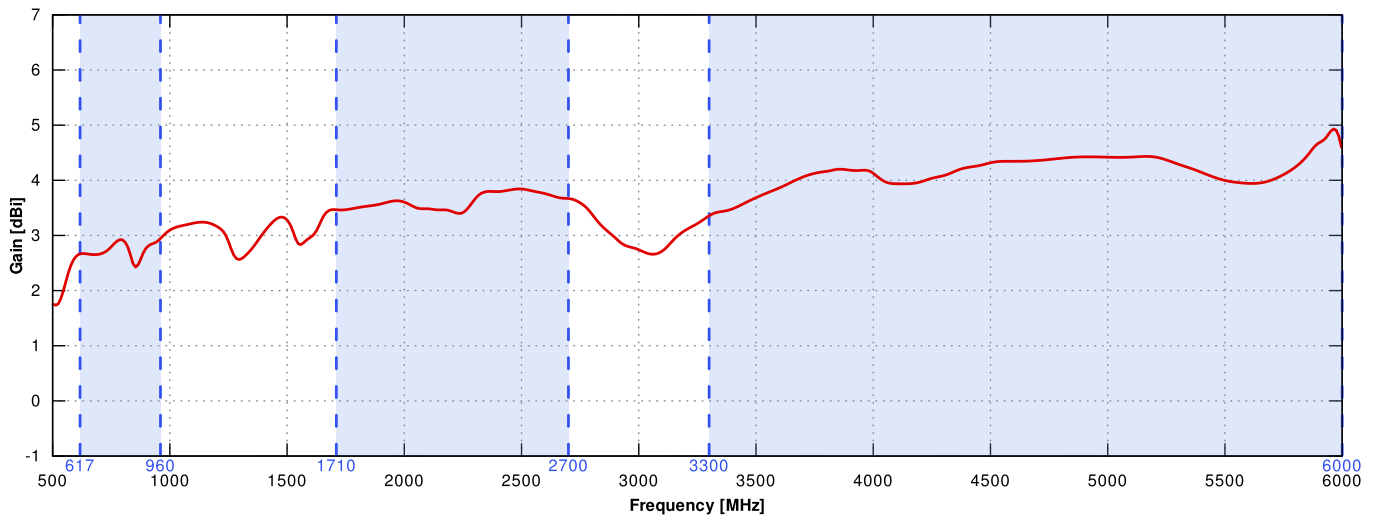



LTE from 650MHz to 950MHz

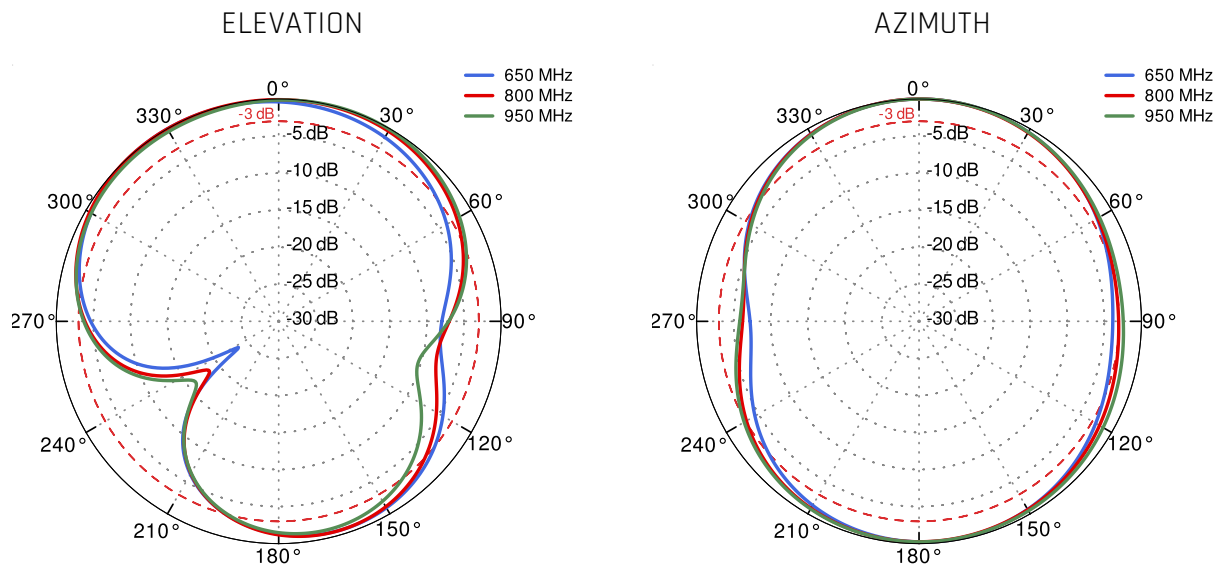



LTE from 1.71GHz to 2.5GHz

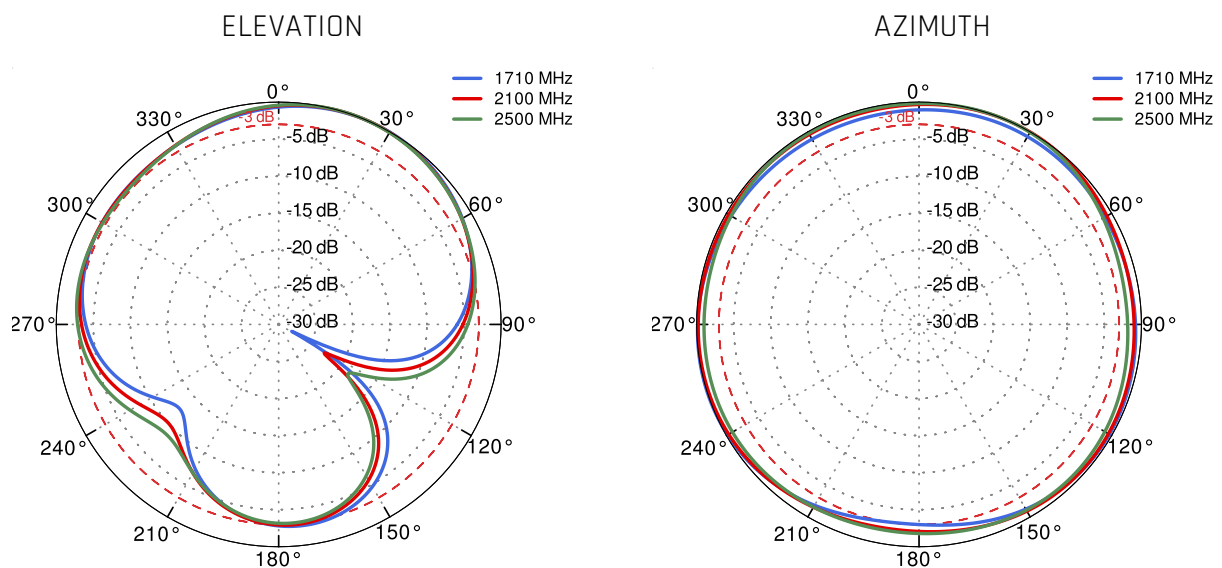

LTE from 3.3GHz to 4.0GHz

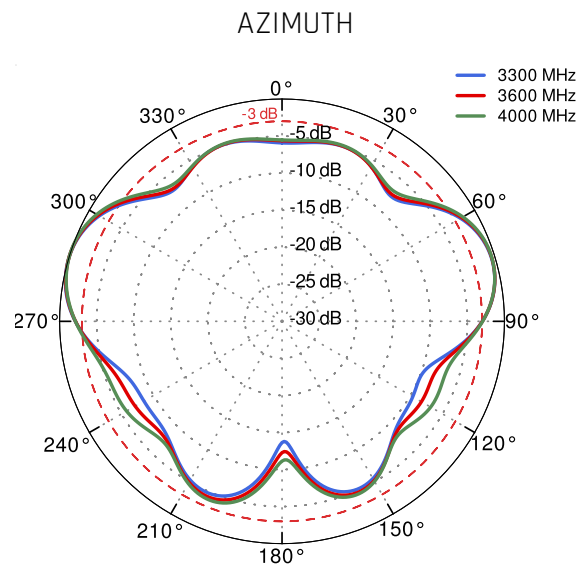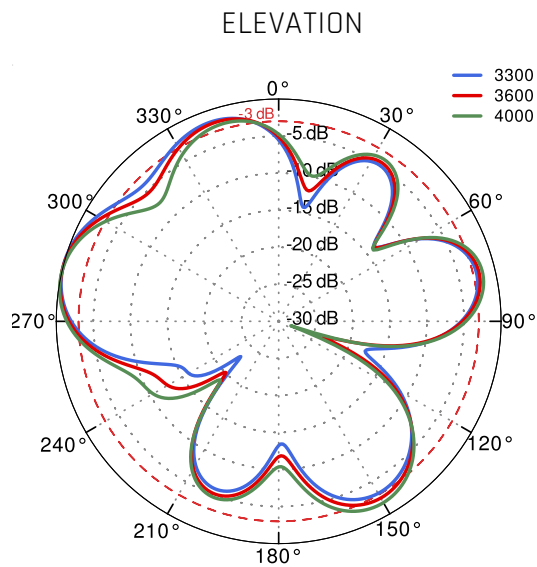

Wi-Fi 2.4GHz and 5GHz

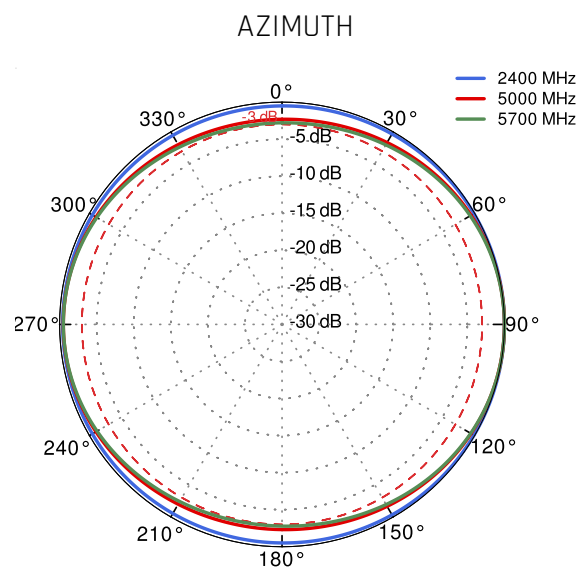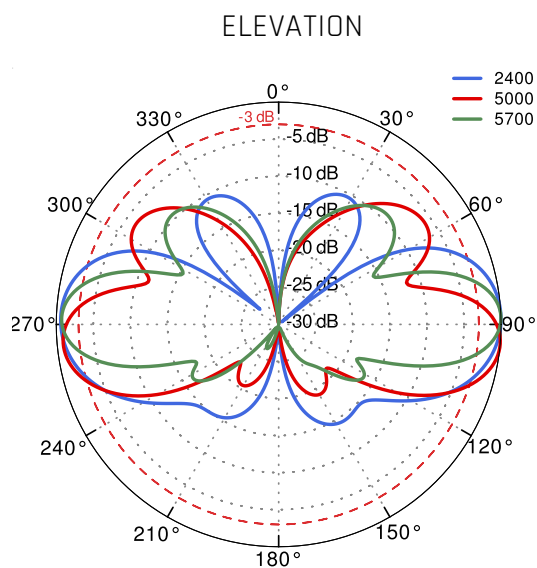

DIMENSIONS

