

QuMax for Teltonika RUT2xx ver. US (Band71)

INTEGRATED MULTI-BAND 5G DIRECTIONAL ANTENNA + WI-FI OMNI ANTENNA + PLACE TO INSTALL TELTONIKA RUT260/RUT241/RUT240/RUT200/RUT230 (ALL-IN-ONE)

QuMax for **RUT2xx ver. US (Band71)** is an outdoor antenna designed to provide reliable wireless connectivity in a variety of environments. It is dedicated to connections with long distance to base station. It is designed to have Teltonika **RUT271, RUT260, RUT241, RUT240, RUT230** or **RUT200** router installed inside IP68 enclosure. It is the first choice for fixed installations in industrial environment. **It has embedded also Wi-Fi omni antenna.**

NOTE: For RUT230 one LTE antenna is unplugged.



OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP68



MOUNTING SYSTEM WITH TWO
PLANES, 60 DEGREES REGULATION




WIDE BAND 600-6000MHZ, 5G
TECHNOLOGY



ALL ANTENNAS AND TELTONIKA
ROUTER INTEGRATED IN ONE
ENCLOSURE



MADE IN EUROPE

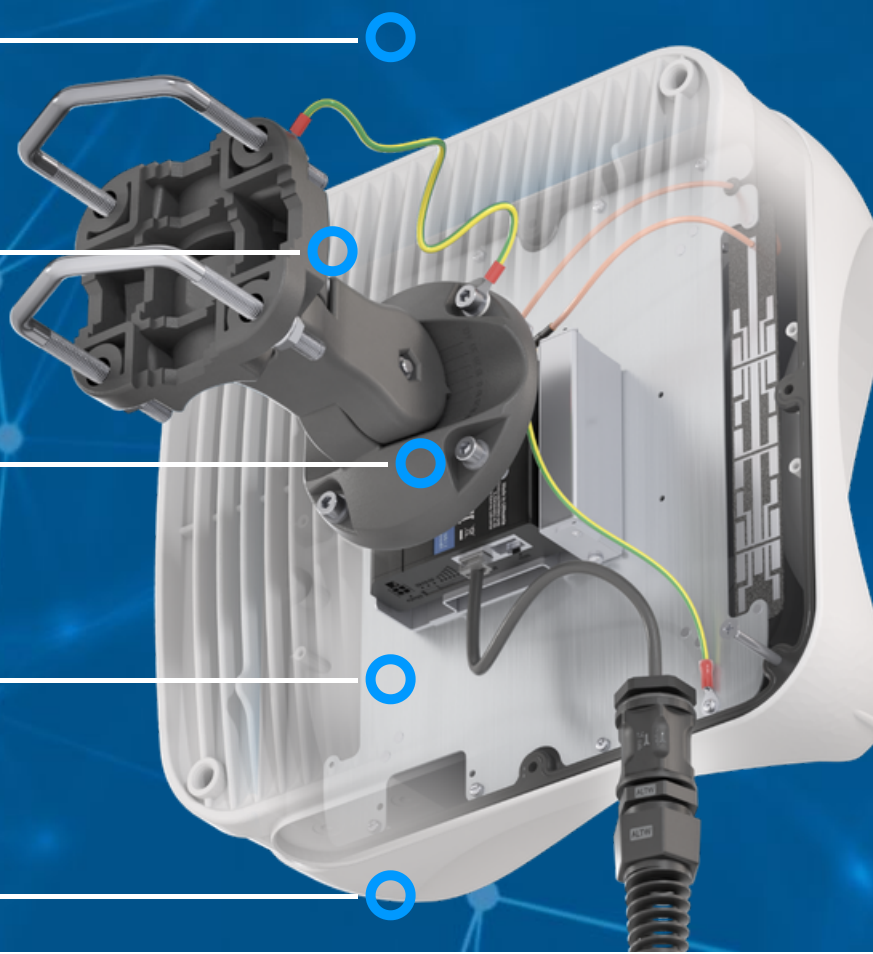

5G / LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.6 GHz 4.7 - 6.0 GHz
GAIN	617 - 960 MHz : 6 dBi 1.7 - 2.7 GHz : 7 dBi 3.3 - 4.6 GHz : 7 dBi 4.7 - 6.0 GHz : 5.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 46, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n46, n47, n48, n53, n65, n66, n67, n71, n77, n78, n79, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<2.00, max <3.00
BEAMWIDTH	80°/80° ±15°
POLARIZATION	X (±45degrees)
IMPEDANCE	50 Ω
CONNECTOR	2x SMA
CABLE TYPE	RG316

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7- 6.0 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6.0 GHz : 7 dBi
VSWR	< 1.70, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
CONNECTOR	1x RPSMA
CABLE TYPE	RG316

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, fiberglass
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	26.9 x 26.95 x 17.7 cm 10.6 x 10.6 x 7 inch
WEIGHT	1.93 kg 4.255 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F

**ENCLOSURE RECOMMENDED
TIGHTENING TORQUE**

0.6 - 0.8 Nm

 **MOUNTING KIT****DIMENSIONS**9.9 x 10.5 x 14.8 cm
3.9 x 4.13 x 5.83 inch**REGULATION RANGE**

+/- 30°

MAST DIAMETER RANGE25 - 66mm
0.98-2.60 inch**MATERIAL**


Polyamide with fiberglass + galvanized steel U-Bolts

MOUNTING PLACE

Wall or ceiling or mast

 **FREQUENCY BANDS****LTE / 4G**


	1	2	3	4	5	7	8	
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
617 MHz	29	30	33	34	35	36	37	6000 MHz
	38	39	40	41	42	43	44	
	46	47	48	49	52	53	65	
	66	67	68	69	71	85	103	
	106							




	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617	n46	n47	n48	n53	n65	n66	n67	6000
MHz	n71	n77	n78	n79	n80	n81	n82	MHz
	n83	n84	n85	n86	n89	n90	n95	
	n97	n98	n100	n101	n256			

PLOTS


LTE VSWR

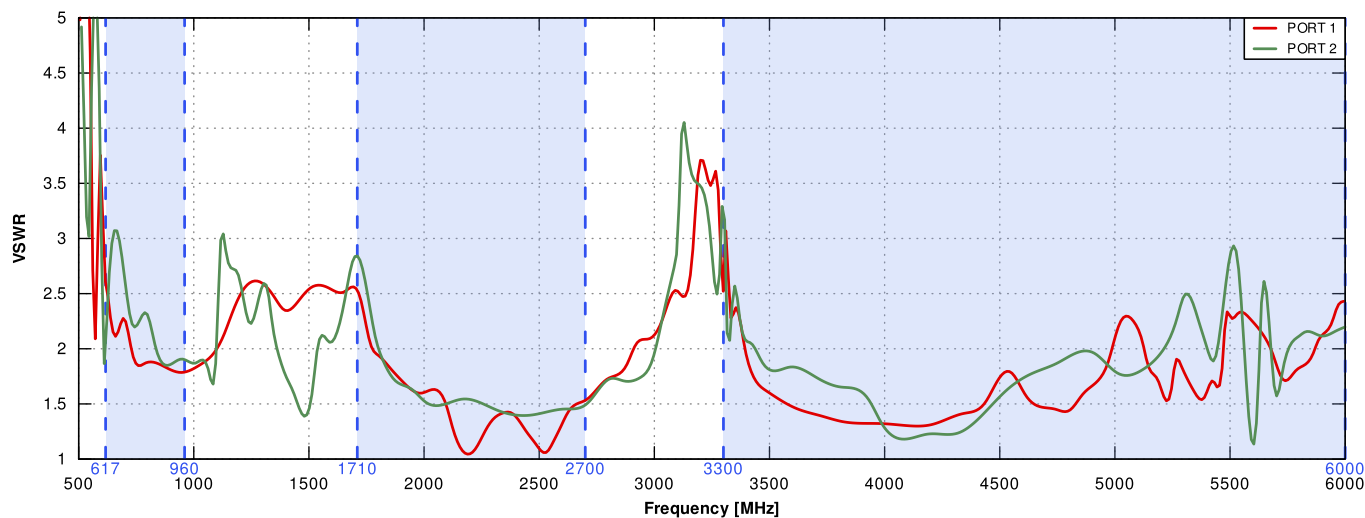


WI-FI VSWR

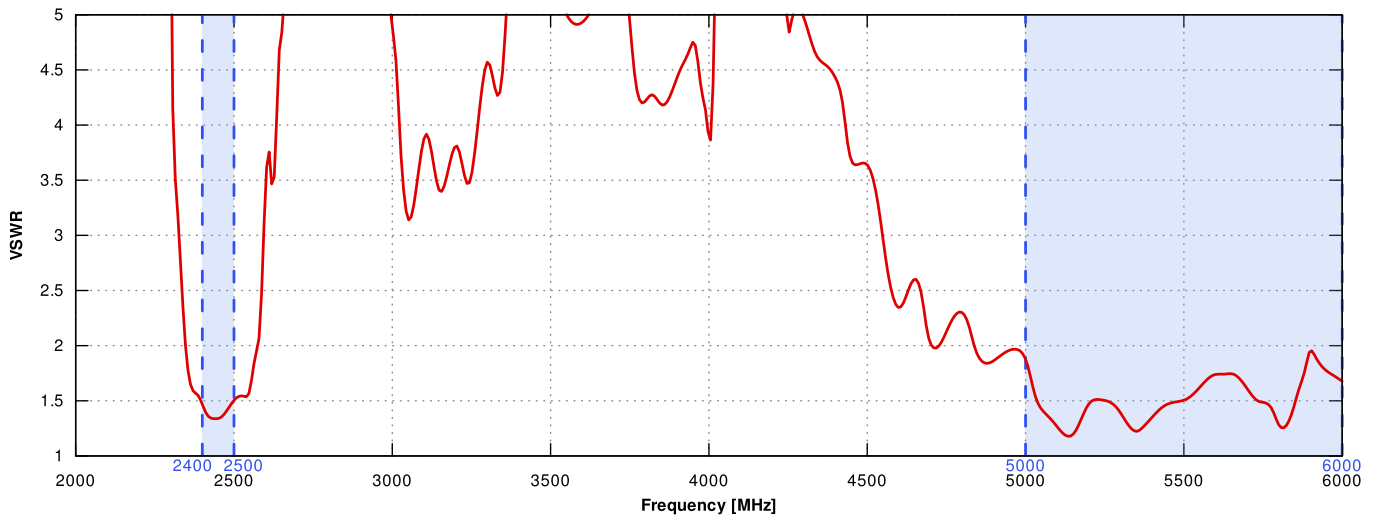


LTE Gain

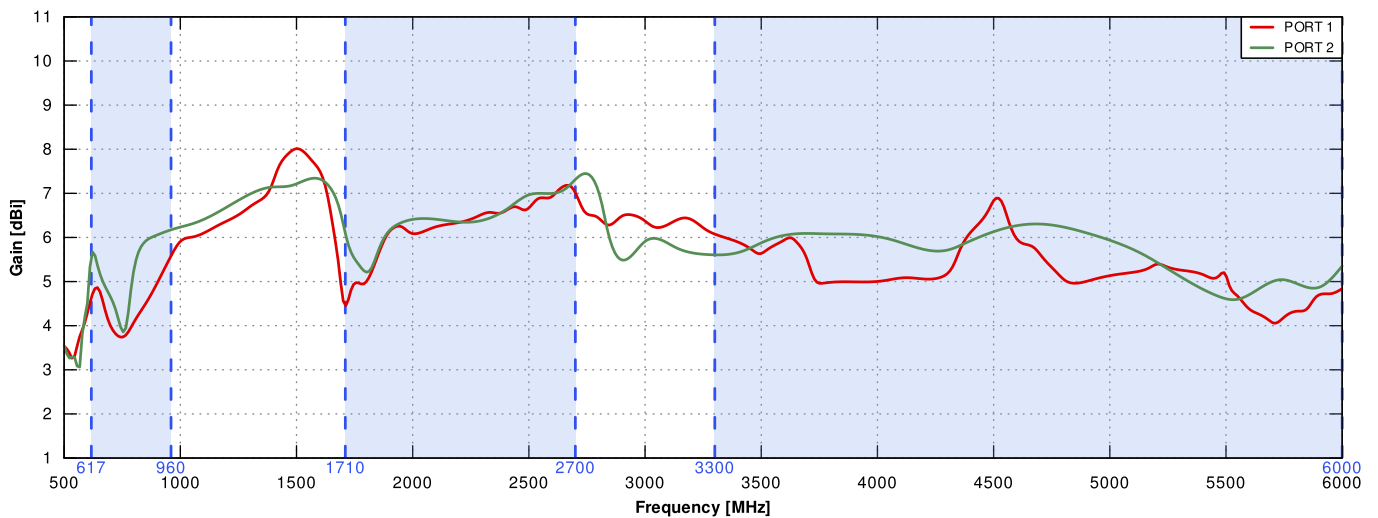


WI-FI Gain

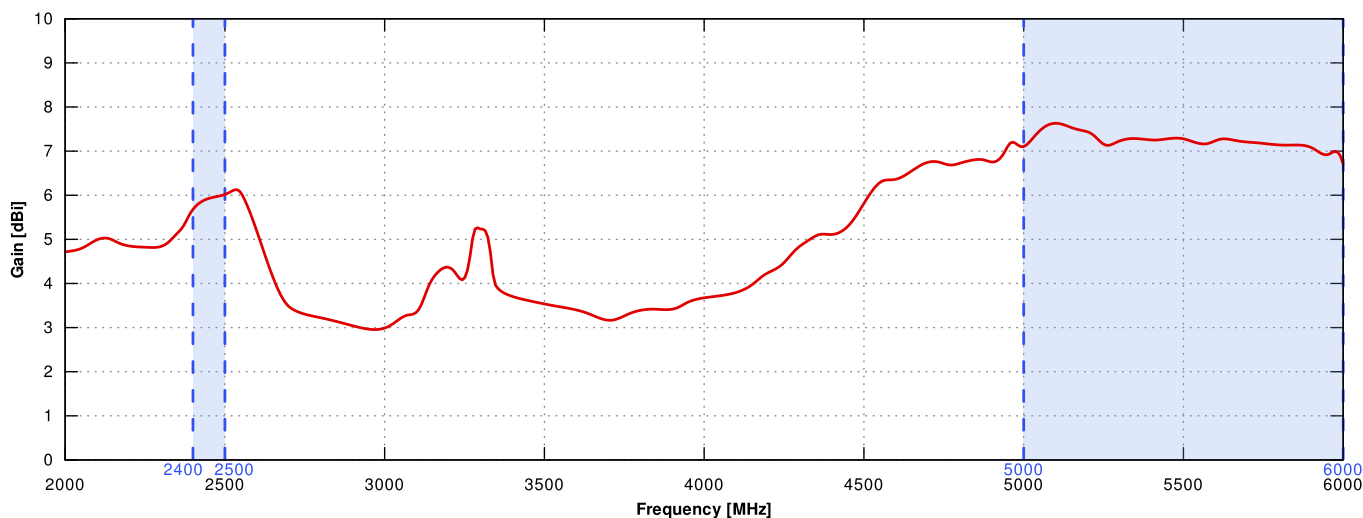


PORT 1 - 5G/LTE from 650MHz to 950MHz

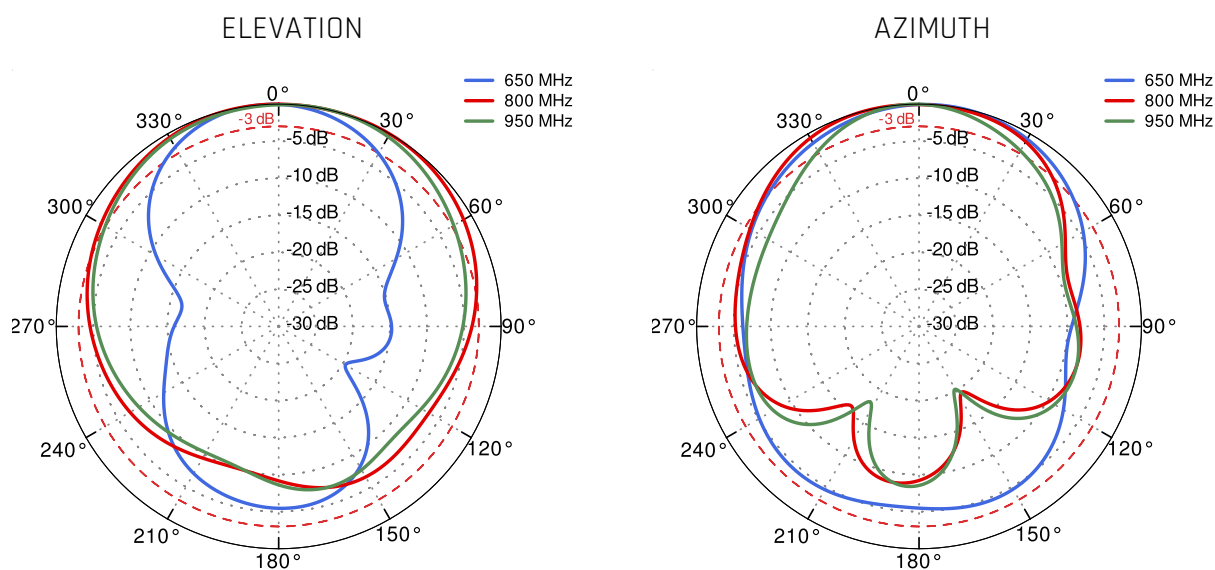



PORT 1 - 5G/LTE from 1.71GHz to 2.17GHz

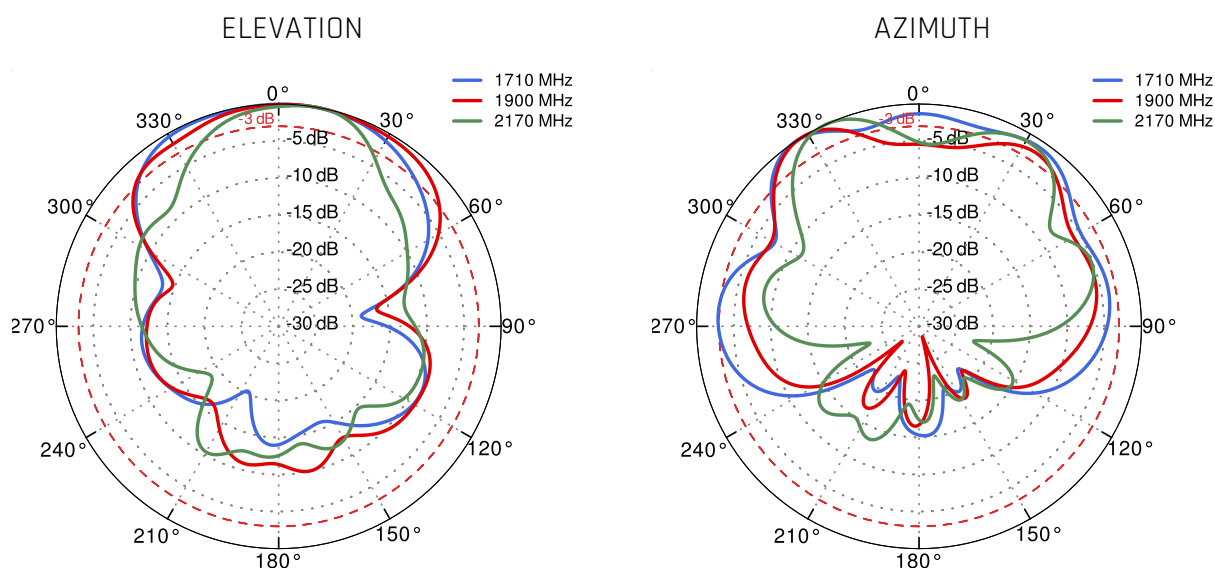



PORT 1 - 5G/LTE from 2.3GHz to 2.7GHz

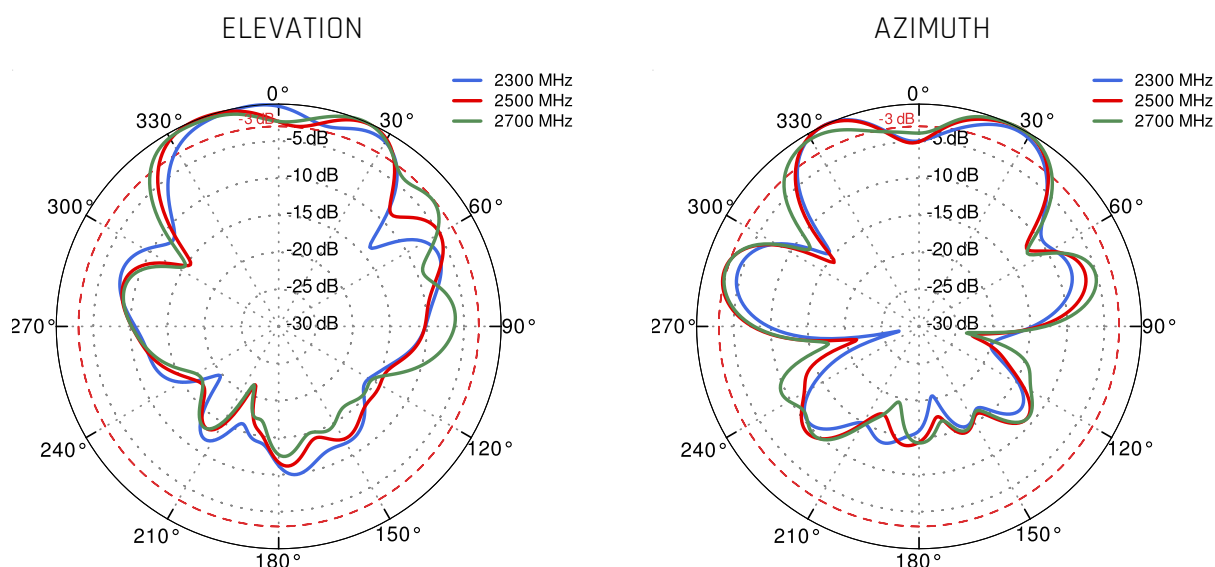


PORT 1 - 5G/LTE from 3.3GHz to 3.8GHz

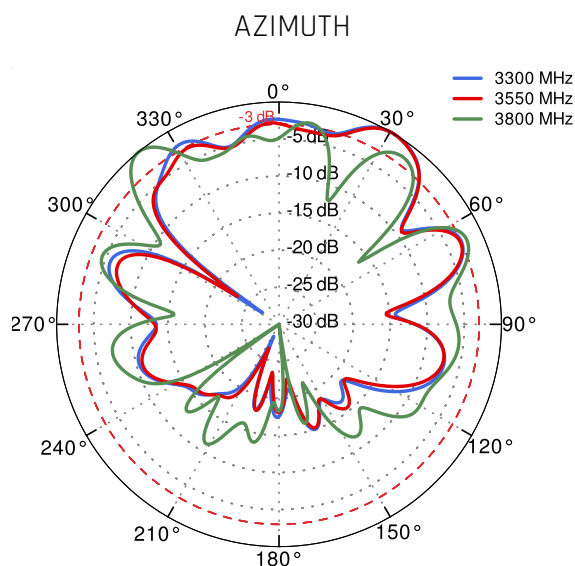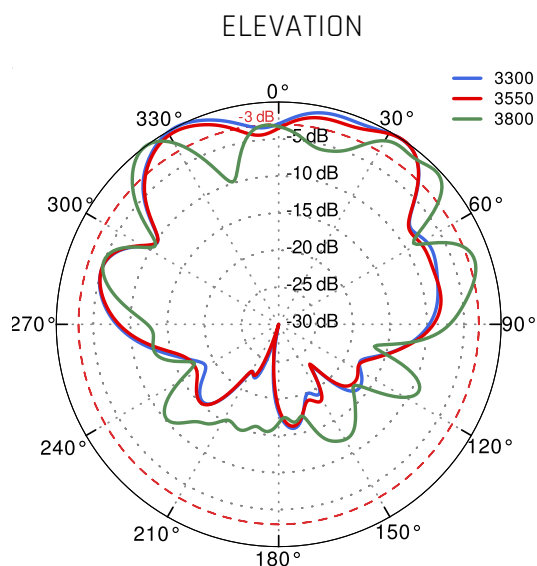


PORT 1 - 5G/LTE from 4.2GHz to 4.6GHz

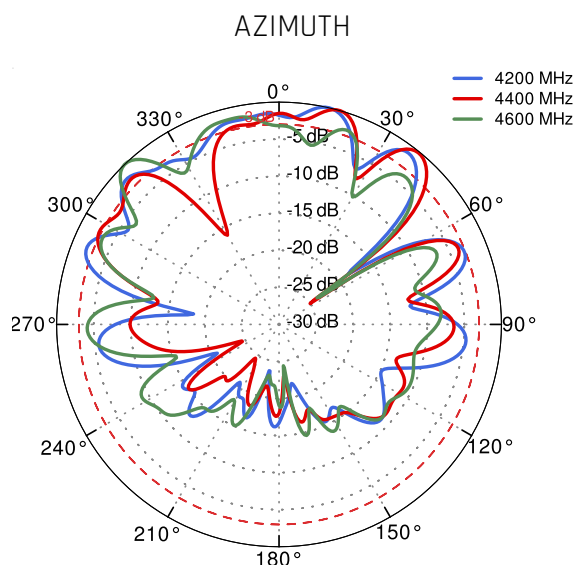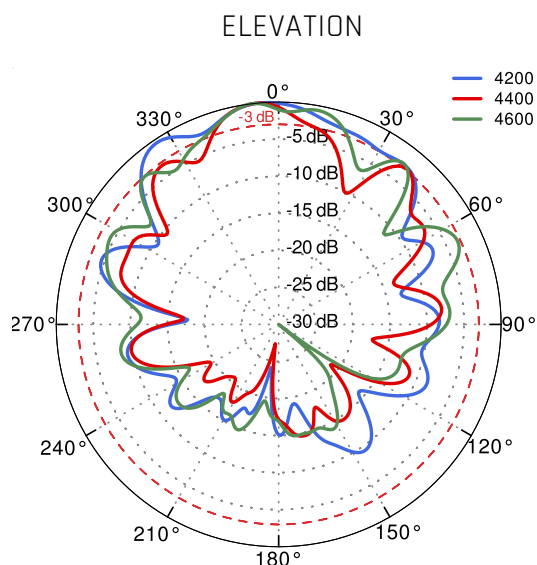


PORT 1 - 5G/LTE from 5.0GHz to 5.9GHz

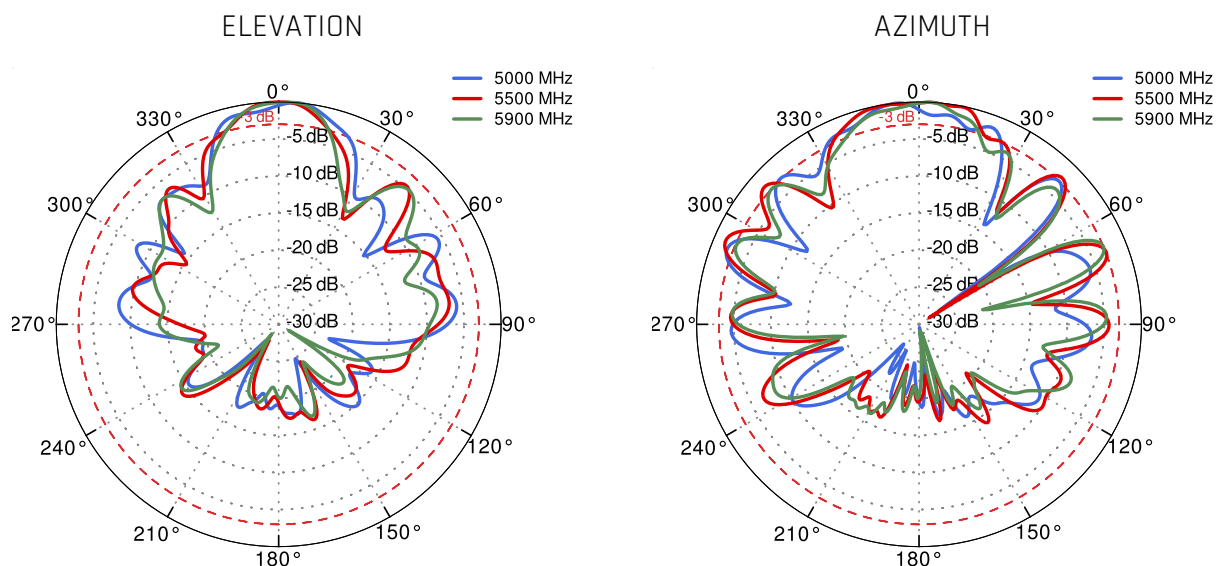


PORT 2 - 5G/LTE from 650MHz to 950MHz

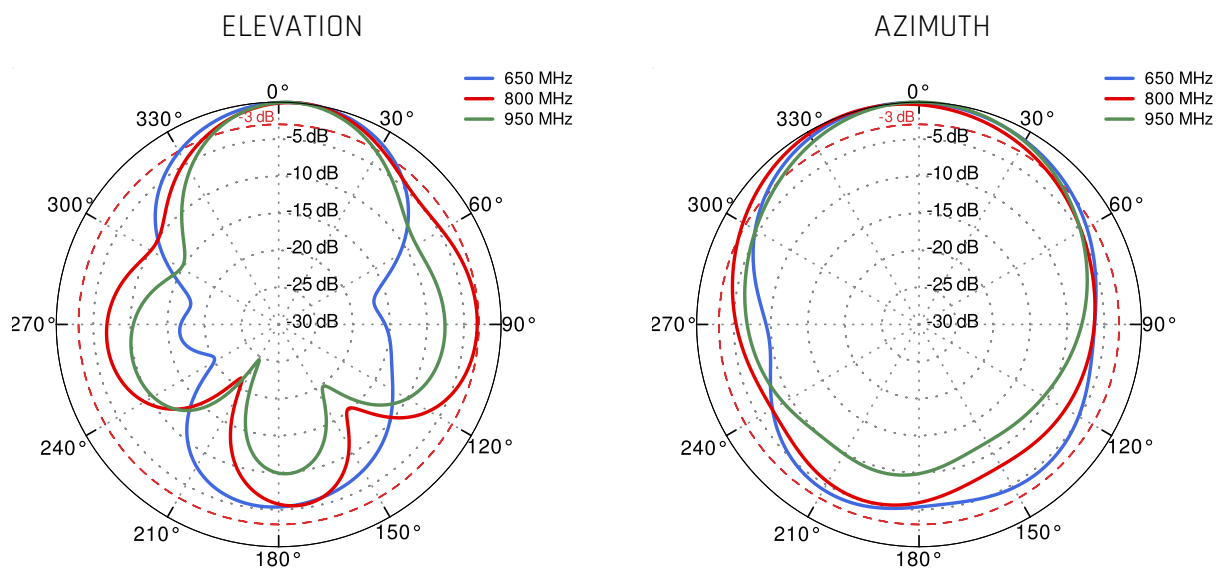


PORT 2 - 5G/LTE from 1.71GHz to 2.17GHz

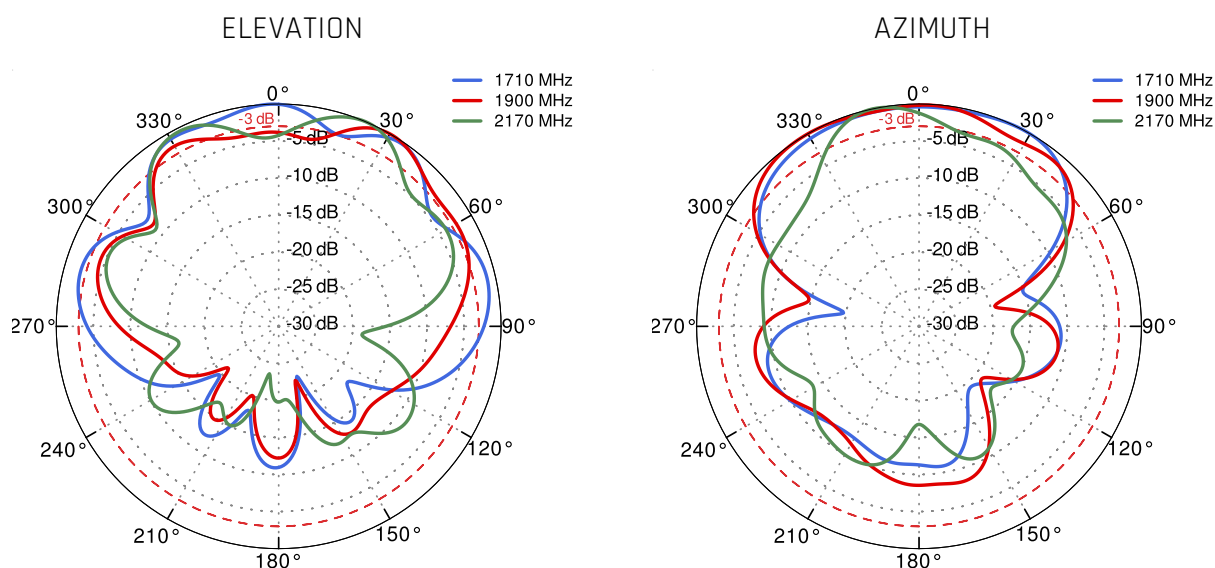


PORT 2 - 5G/LTE from 2.3GHz to 2.7GHz

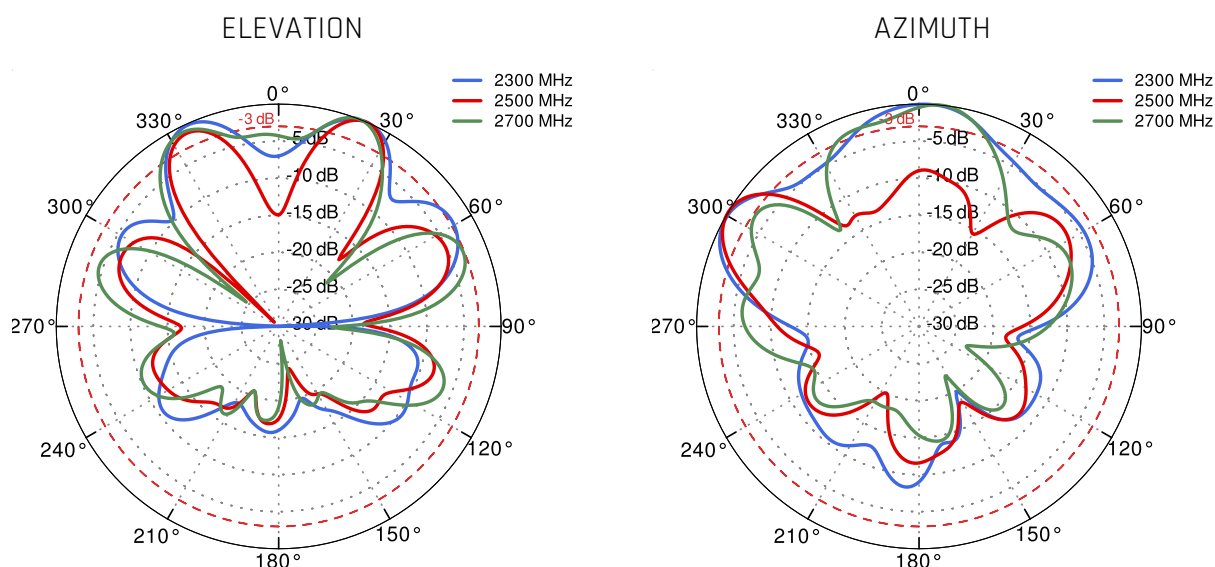



PORT 2 - 5G/LTE from 3.3GHz to 3.8GHz

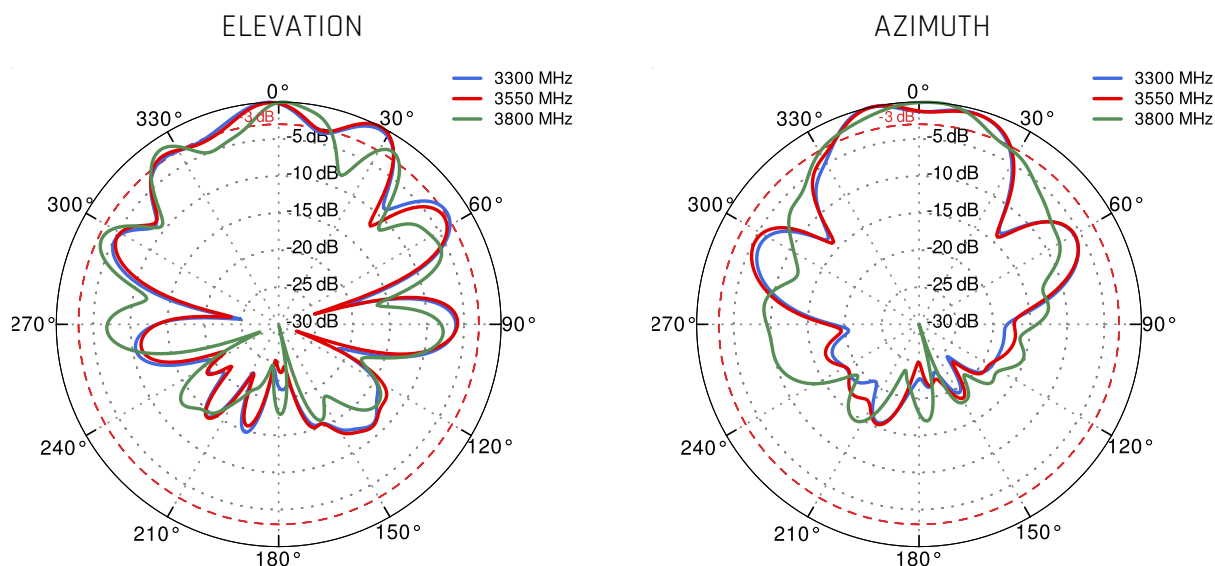



PORT 2 - 5G/LTE from 4.2GHz to 4.6GHz

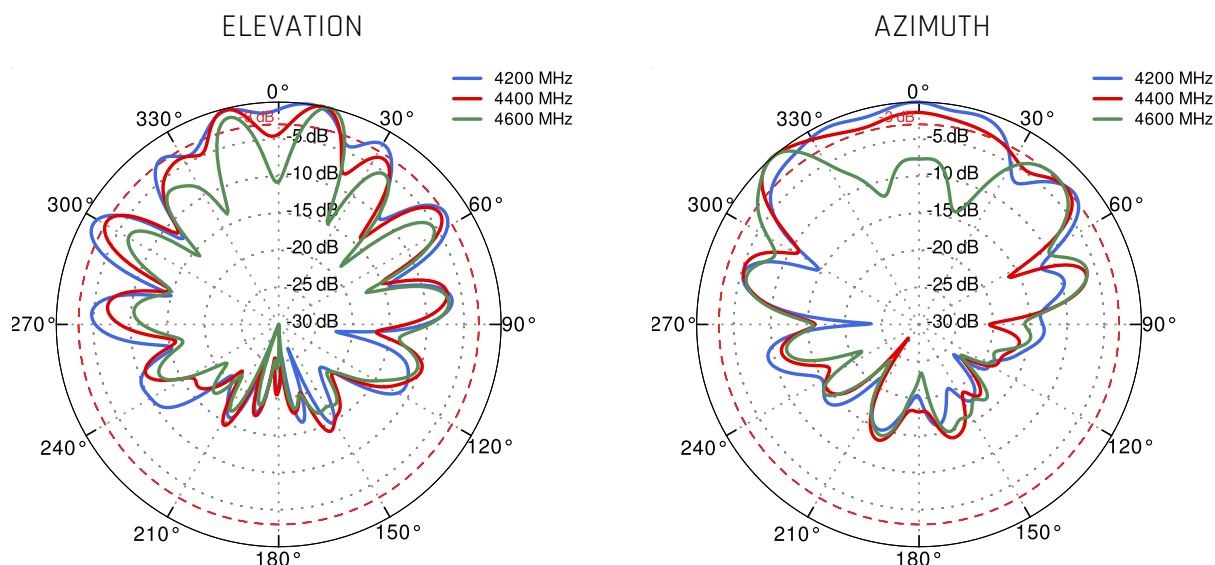

PORT 2 - 5G/LTE from 5.0GHz to 5.9GHz

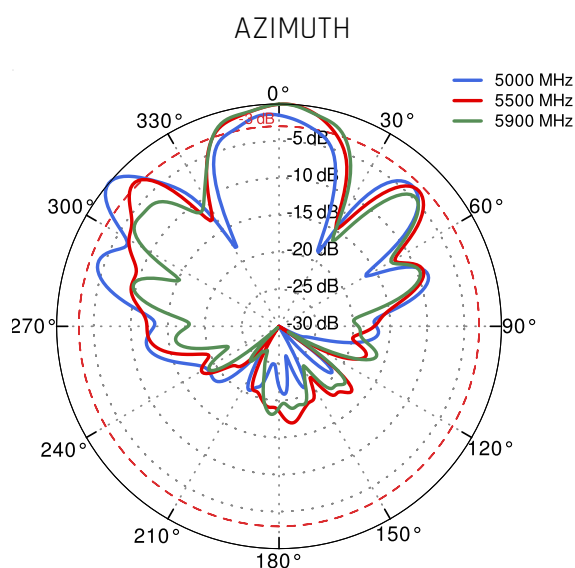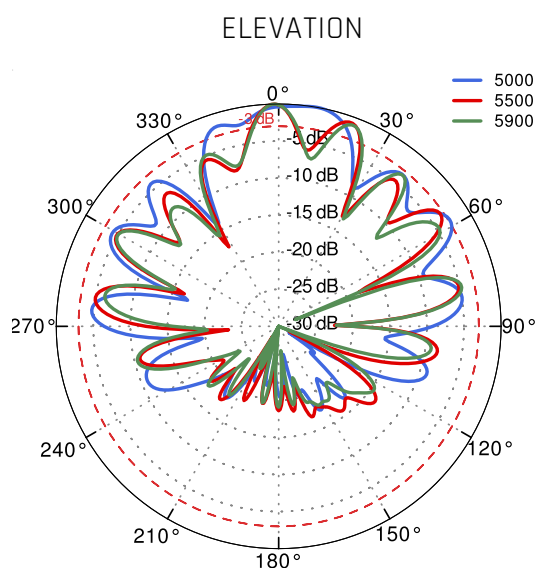

Wi-Fi From 2.4 GHz to 6.5 GHz

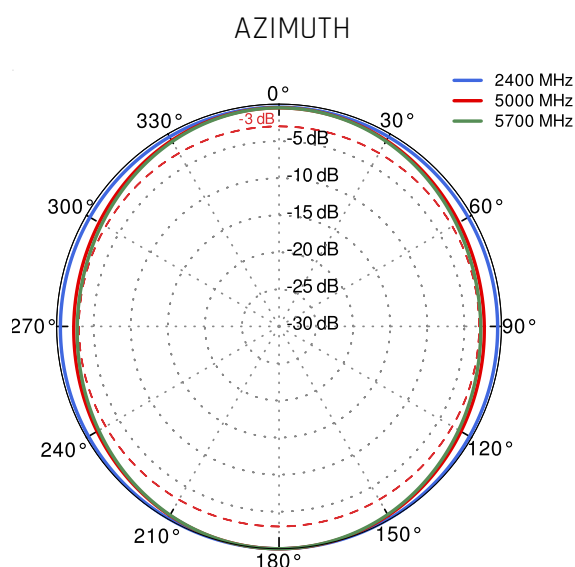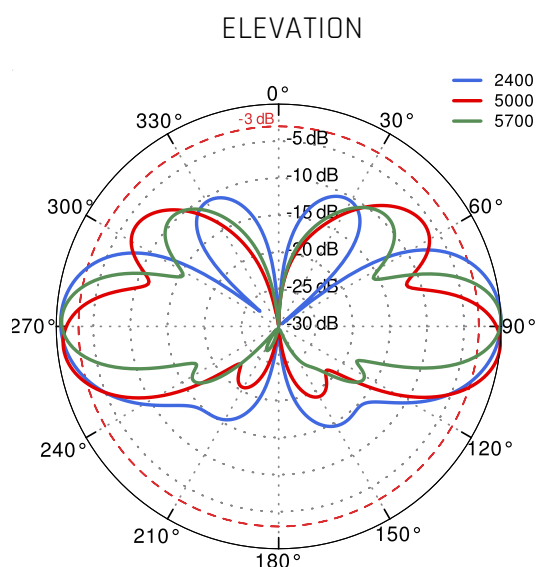

DIMENSIONS

