


# QuMax for Teltonika RUTX11

**Integrated outdoor LTE high power directional antenna + outdoor Wi-Fi dual band 2.4 & 5 GHz omni antenna + Bluetooth antenna + GPS antenna + place to install Teltonika RUTX11 (All-in-one)**

QuMAX offers the most powerful directional LTE antenna of all QuWireless antennas. It is dedicated to connections with long distance to base station. It is designed to have Teltonika **RUTX11** router installed inside IP67 enclosure. It is the first choice for fixed installations in industrial environment. It also has embedded GPS antenna, Bluetooth antenna and outdoor Wi-Fi dual band 2.4 & 5 GHz omni antennas.

This product is also compatible with **RUTM11**. If used with RUTM11, the Bluetooth antenna is unused.

**4G**  
LTE**Wi Fi**  
DUALBAND  
2.4GHz  
5GHz  
BLUETOOTH  
GPS  
694-2700MHz  
7 dBi  
DIRECTIONAL  
IP 67  
-40° TO +80°

ALL ANTENNAS AND TELTONIKA  
ROUTER INTEGRATED **IN ONE**  
ENCLOSURE




OUTDOOR ANTENNA WORKS IN **ANY**  
**WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



MADE IN **EUROPE**

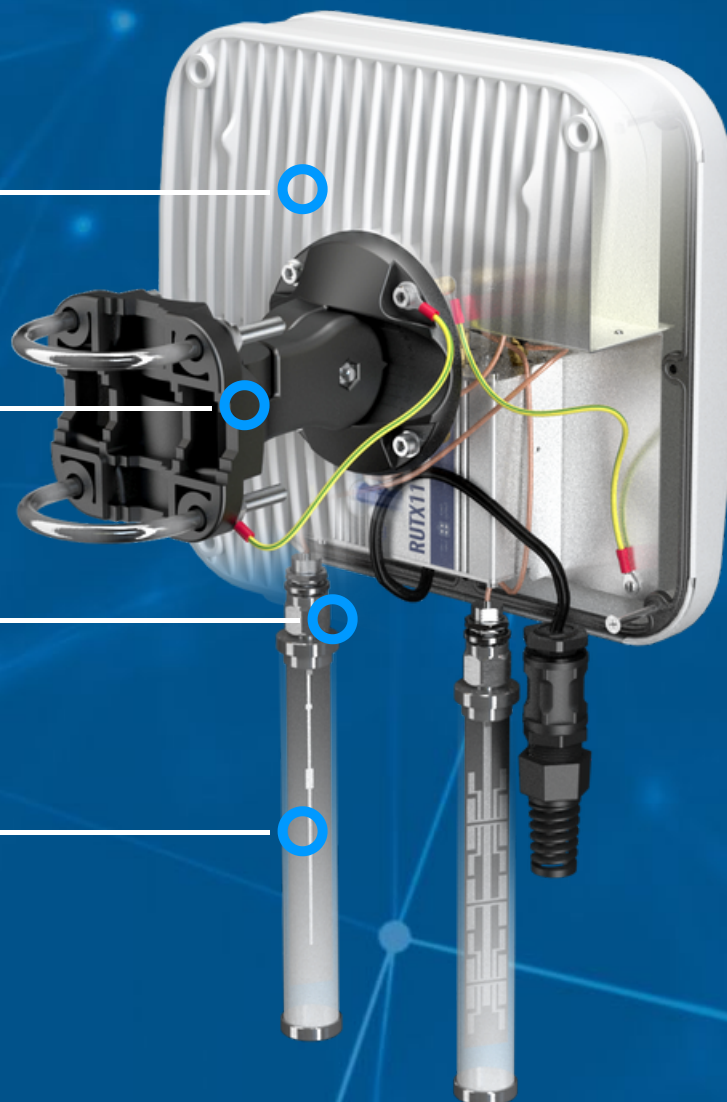

## LTE ANTENNA SPECIFICATION

FREQUENCY	0.694 - 0.96 GHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n90, n95, n97, n98, n100, n101, n256
GAIN	0.694 - 0.96 GHz : 4 dBi 1.7 - 2.2 GHz : 5 dBi 2.2 - 2.7 GHz : 6 dBi
FRONT-TO-BACK	>8 dB
VSWR	<1.30, max <1.80
BEAMWIDTH	90°/90° ±30°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.70 - 6.00 GHz
GAIN	2.40 - 2.50 GHz : 6 dBi 4.70 - 6.00 GHz : 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

## BLUETOOTH ANTENNA SPECIFICATION

FREQUENCY	2.30 - 2.60 GHz
GAIN	3 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	RJ45 + 2xNf + 2xNm in external omni wi-fi antenna
INGRESS PROTECTION	IP67
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	25-60mm 0.98-2.36 inch

## FREQUENCY BANDS

LTE/4G GSM	694 MHz	5	8	12	13	14	17	18	19	20	26	27	28	29	44	67	68	85	103	n81	n82	n83	n89	n100	960M Hz
LTE/4G UMTS	1710 MHz	1	2	3	4	9	10	25	33	34	35	36	37	39	n80	n84	n86	n95	n98	n101					2170 MHz

**LTE/4G WCS DARS**

2300  
MHz

30

40

n97

2400  
MHz

**LTE/4G**

2400  
MHz

7

38

41

53


69

n90


2700  
MHz

## PLOTS


VSWSR for Wi-Fi antenna

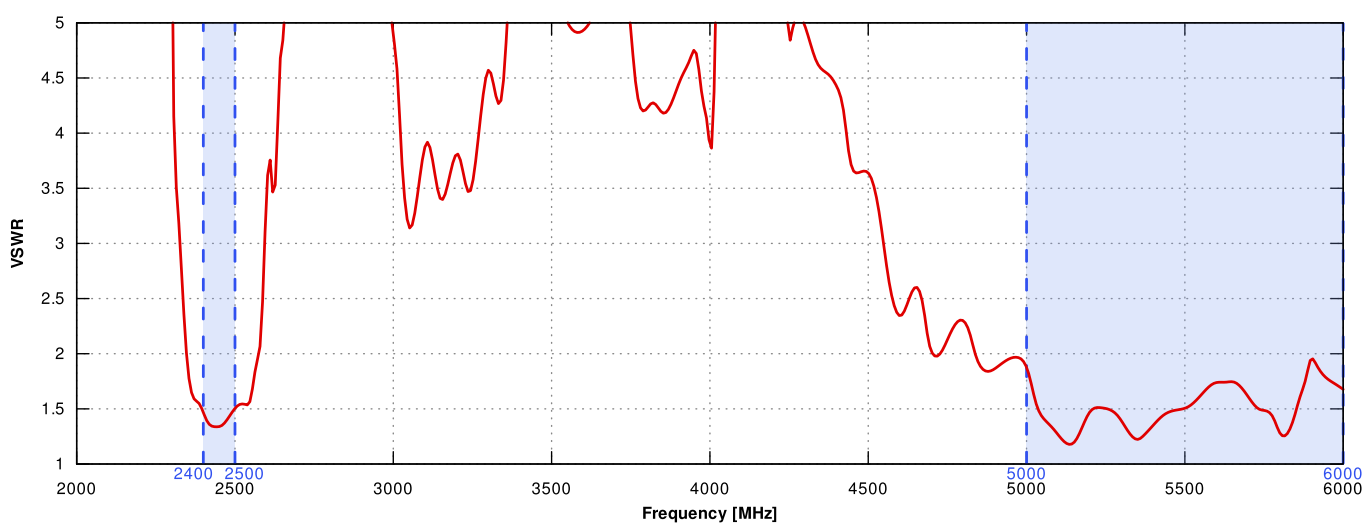


Gain for Wi-Fi antenna

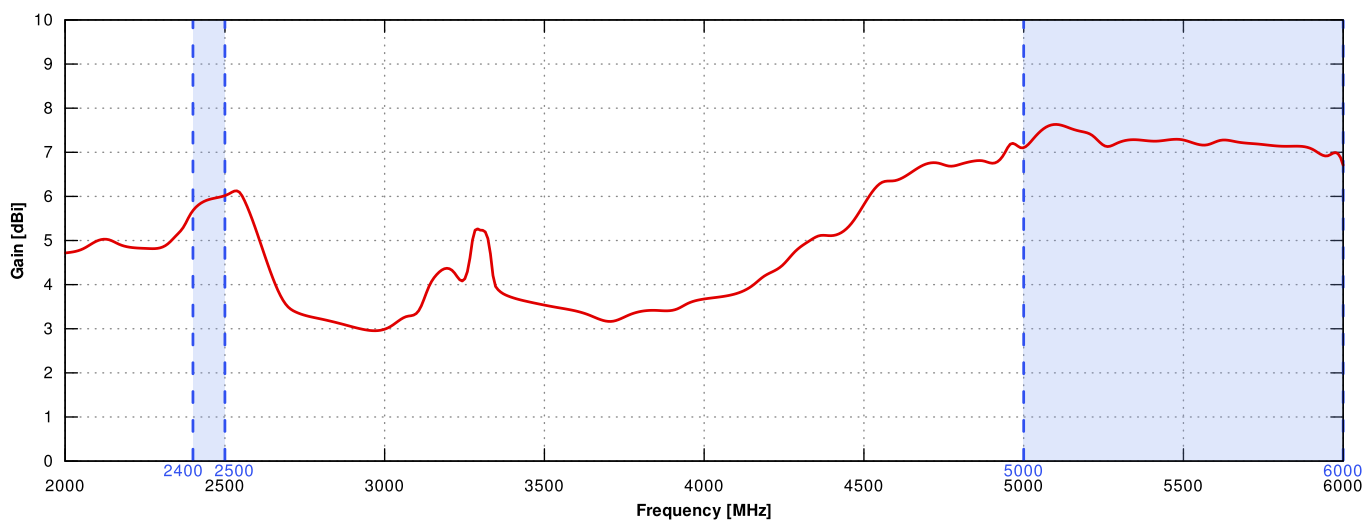



## VSWR for LTE antenna

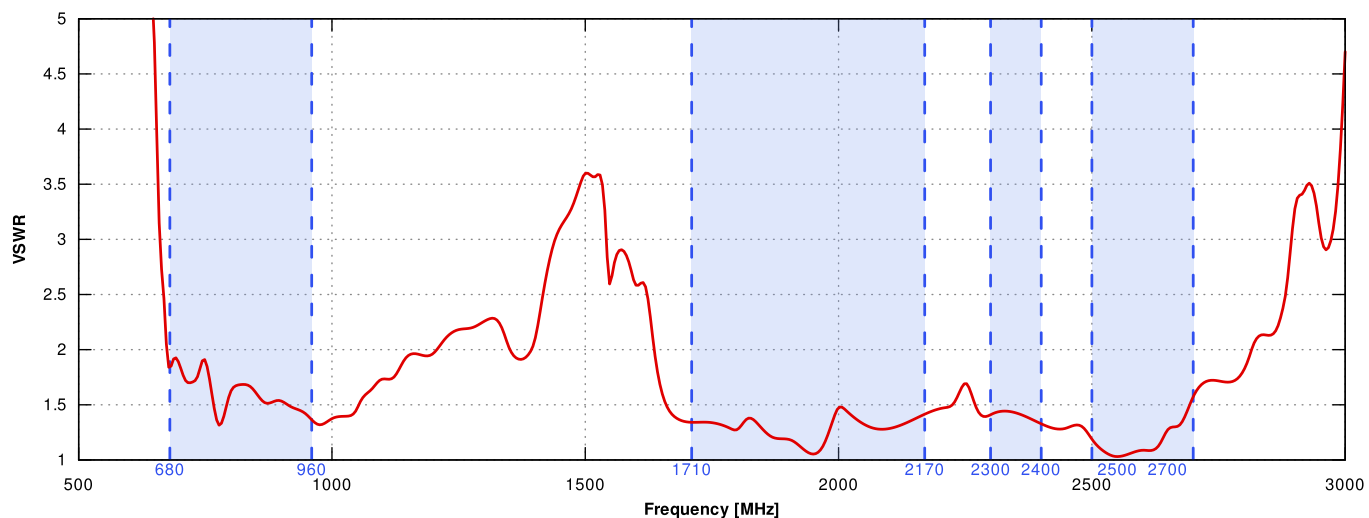



## Gain for LTE antenna

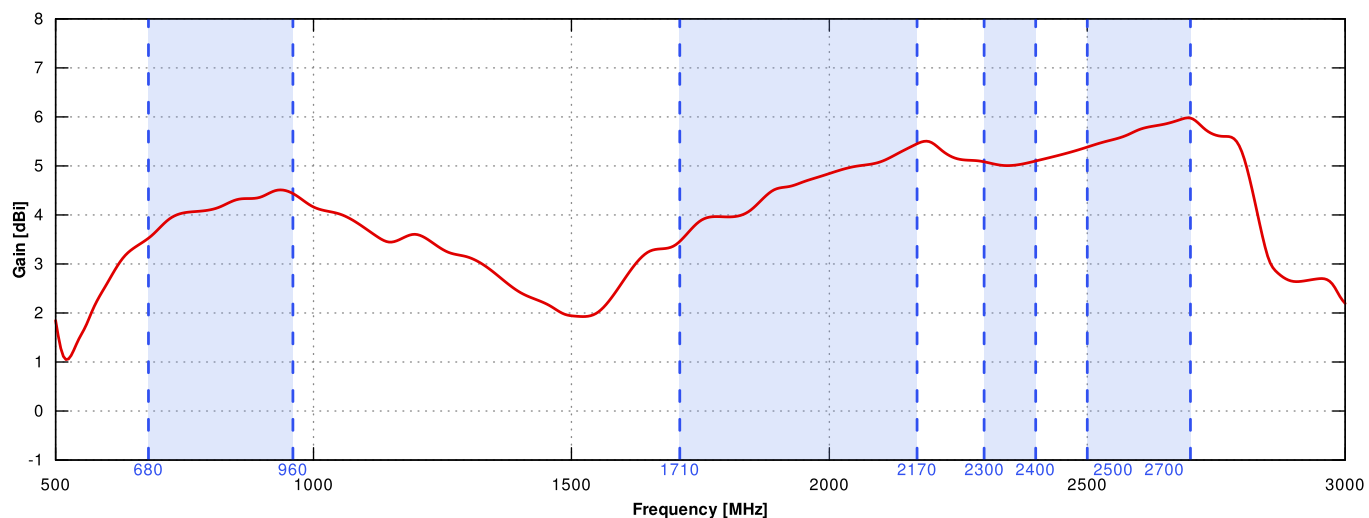



## LTE from 700MHz to 900MHz

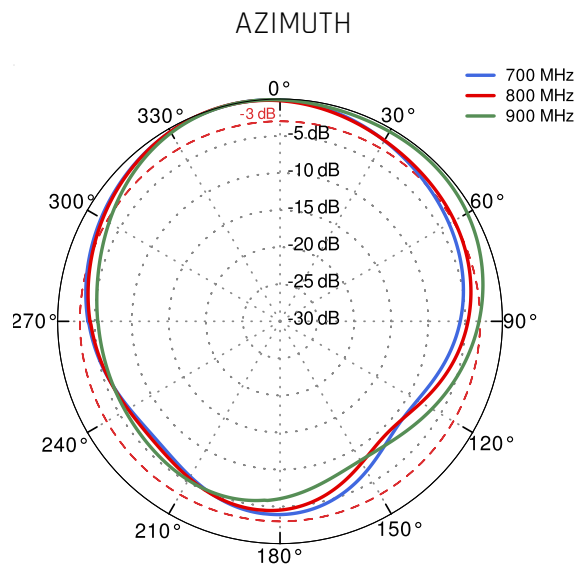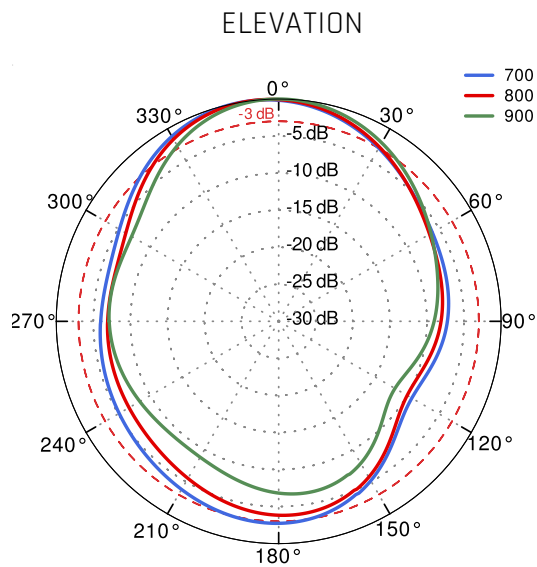



## LTE from 1.71GHz to 2.17GHz

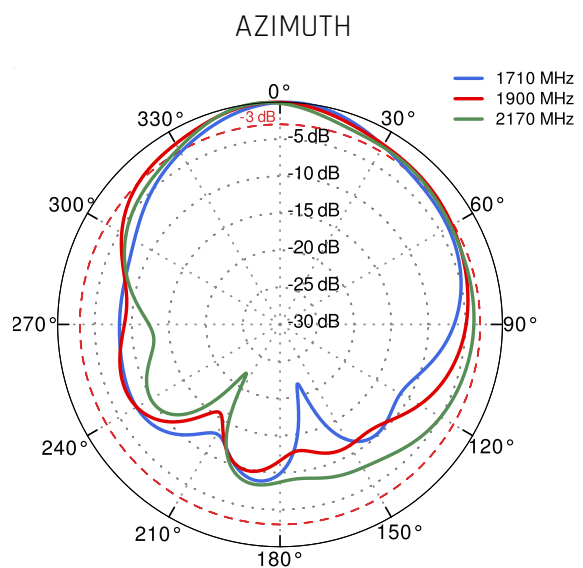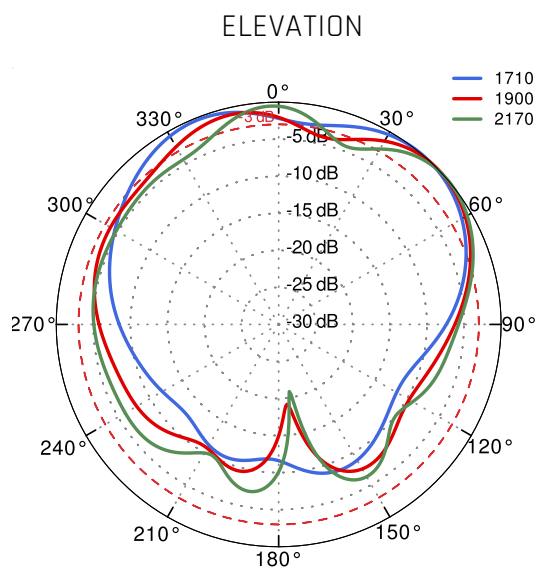

## LTE from 2.3GHz to 2.7GHz

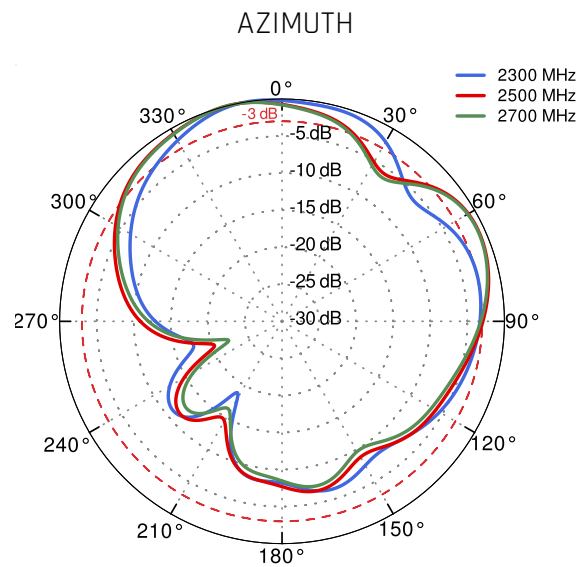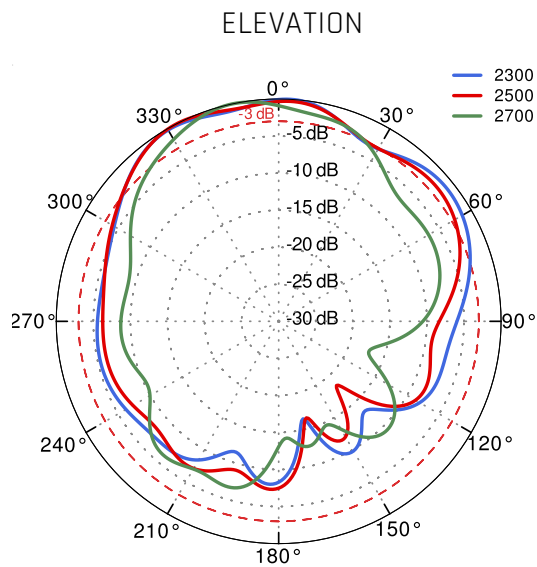

## Wi-Fi 2.4GHz and 5GHz

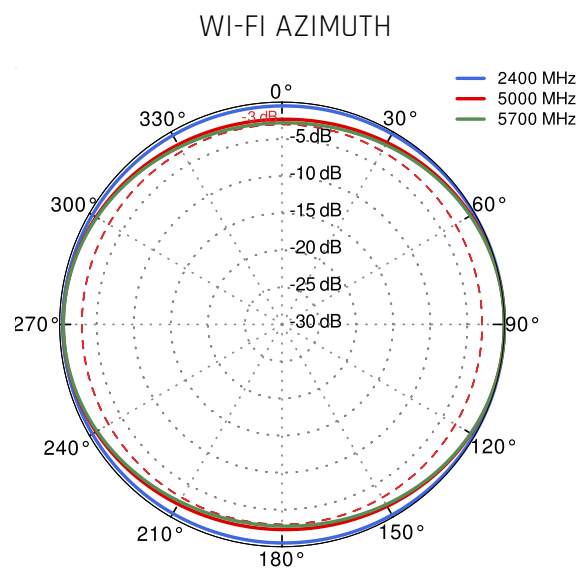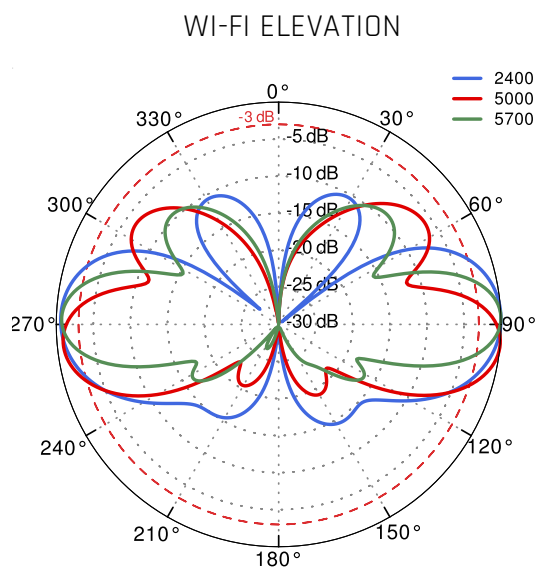



## DIMENSIONS

