

QuMax Omni for Cradlepoint IBR600C & IBR900 & R500

INTEGRATED MULTI-BAND 5G OMNI ANTENNA + WIFI OMNI ANTENNA + GPS ANTENNA + POE SPLITTER + PLACE TO INSTALL CRADLEPOINT IBR600C & IBR900 & R500 (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Cradlepoint IBR600C, IBR900 and R500 router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 5G, Wi-Fi and GPS antenna. If you use IBR600c, IBR900 or R500 with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

5G**Wi Fi**
DUALBAND
2.4GHz
5GHz**GPS****617-6000MHz****6 dBi****OMNI
DIRECTIONAL****IP 67****-40° TO +80°**

OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67



ANTENNA PERFECTLY MATCHED WITH
THE CRADLEPOINT IBR600C & IBR900
& R500



ALL ANTENNAS AND CRADLEPOINT
ROUTER INTEGRATED IN ONE
ENCLOSURE



MADE IN **EUROPE**



5G/LTE SPECIFICATION

| | |
|---------------------|--|
| FREQUENCY | 617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz |
| SUPPORTED LTE BANDS | 1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106 |
| SUPPORTED 5G BANDS | n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256 |
| GAIN | 617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2.5dBi |
| VSWR | <1.80, max <2.00 |
| BEAMWIDTH | 360°/35° ±5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

WI-FI SPECIFICATION

| | |
|--------------|---|
| FREQUENCY | 2.4 - 2.5 GHz 5.0 - 7.2 GHz |
| GAIN | 2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi |
| VSWR | < 1.50, max < 2.00 |
| BEAMWIDTH | 360°/25° +/- 5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

MECHANICAL SPECIFICATION

| | |
|-----------------------|--|
| MATERIAL | BS, aluminum, PTFE, Fiberglass |
| INGRESS PROTECTION | IP67 |
| CONNECTOR TYPE | RJ45 |
| DIMENSIONS | 270.0 x 270.0 x 96.0 mm 10.60 x 10.60 x 3.78 inch |
| WEIGHT | 1.8 kg 3.97 lbs |
| OPERATING TEMPERATURE | From -40°C to 75°C From -40°F to 167°F |

MOUNTING KIT

DIMENSIONS

9.9 x 10.5 x 14.8 cm
3.9 x 4.13 x 5.83 inch

REGULATION RANGE

+/- 30°

MAST DIAMETER RANGE

25 - 60mm
0.98-2.36 inch

MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

WEIGHT

0.87kg

MOUNTING PLACE


Wall or mast or ceiling

PLOTS


VSWR for 5G/LTE antenna




VSWR for Wi-Fi antenna

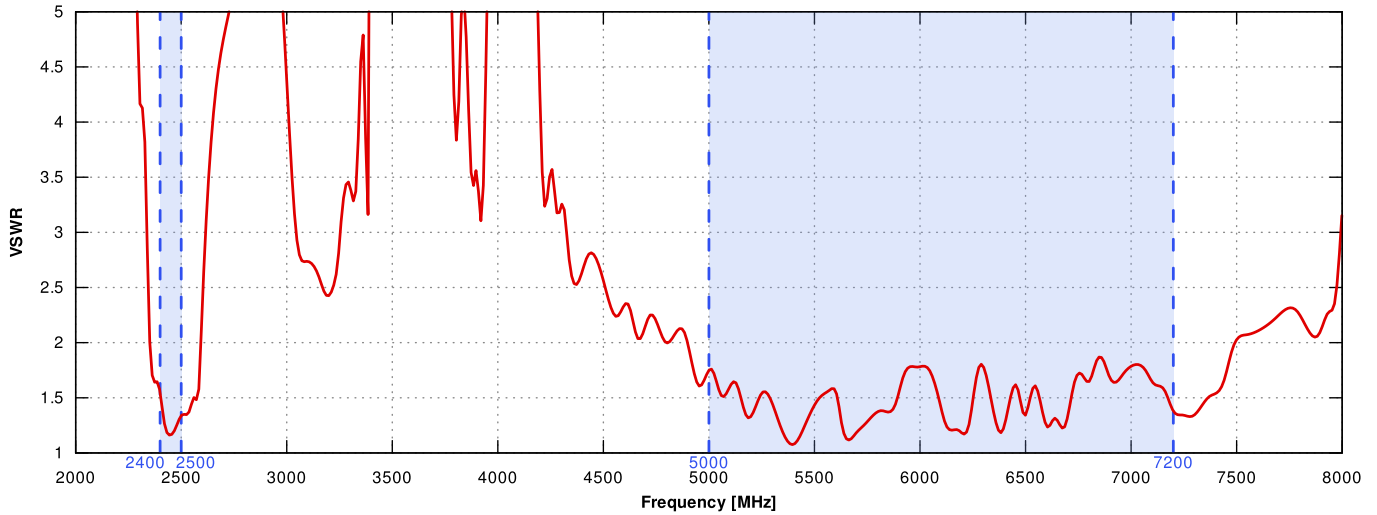


Gain for 5G/LTE antenna

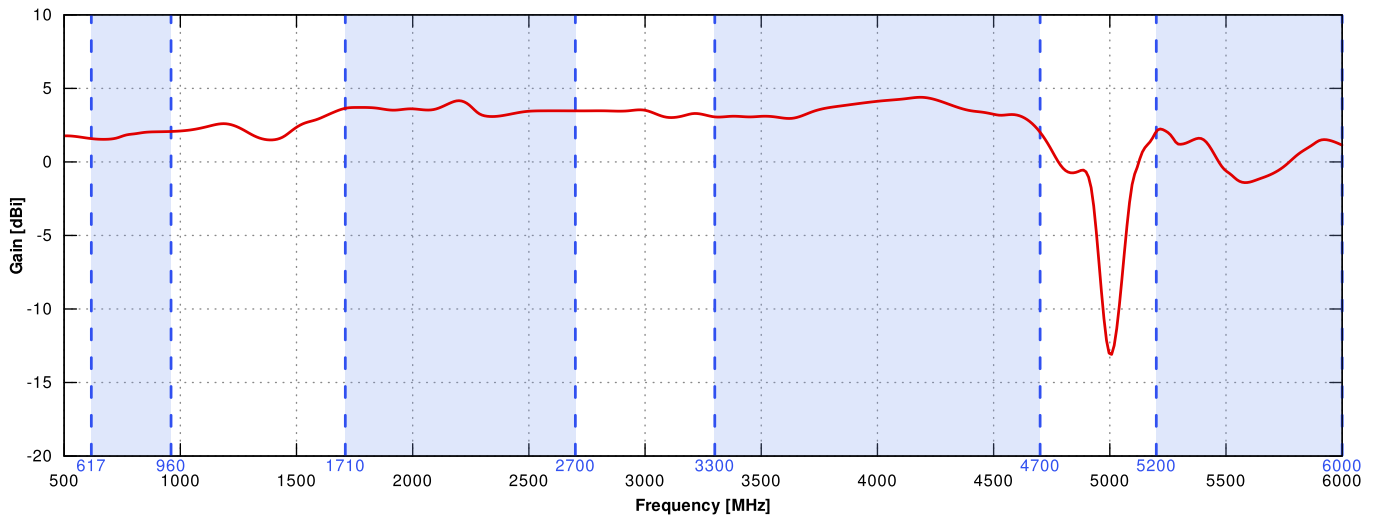


Gain for Wi-Fi antenna

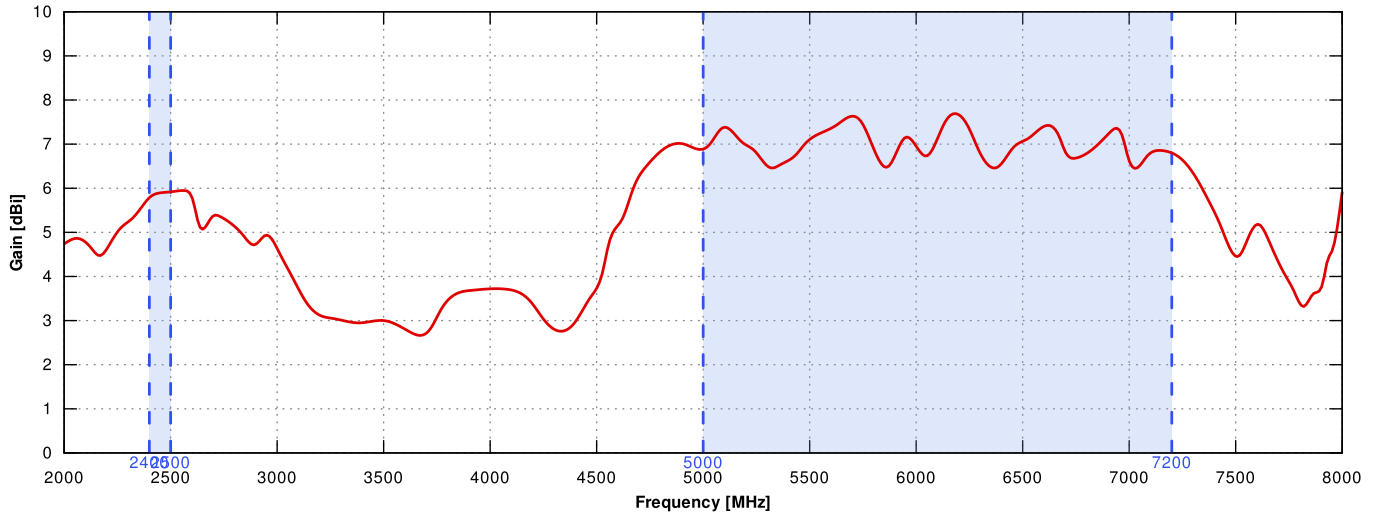


5G/LTE from 617MHz to 960MHz

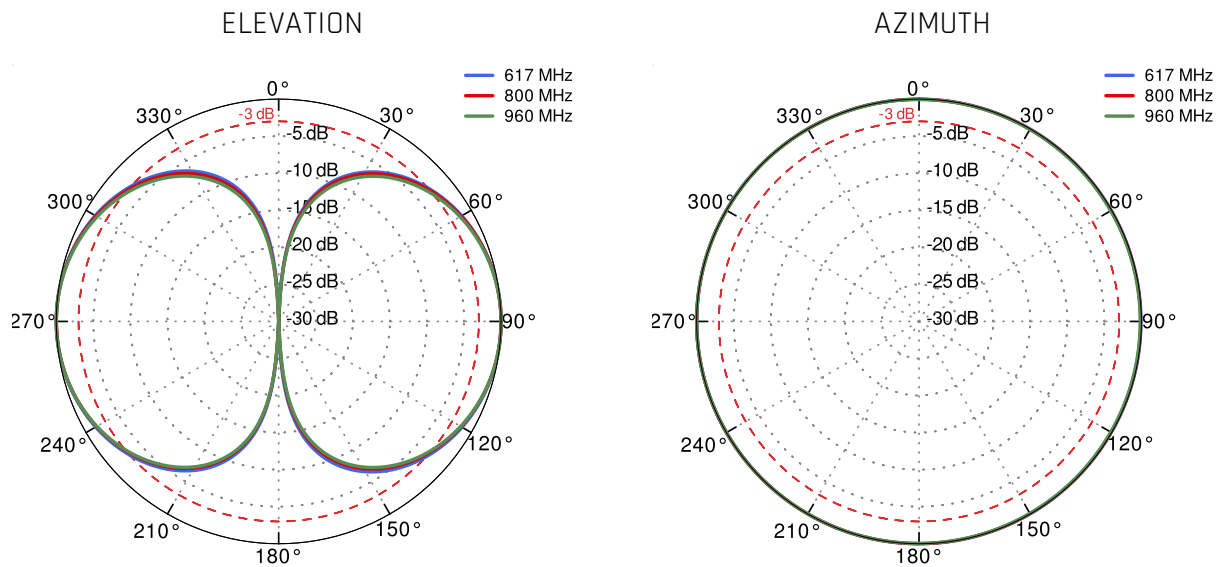

5G/LTE from 1.71GHz to 2.5GHz

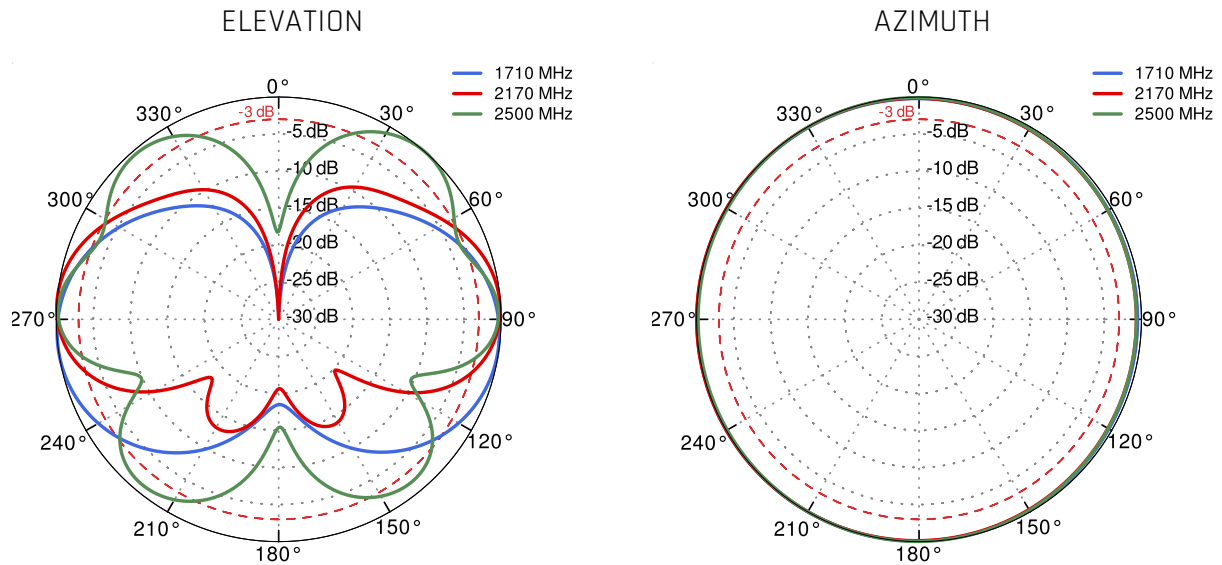



5G/LTE from 3.3GHz to 4.2GHz

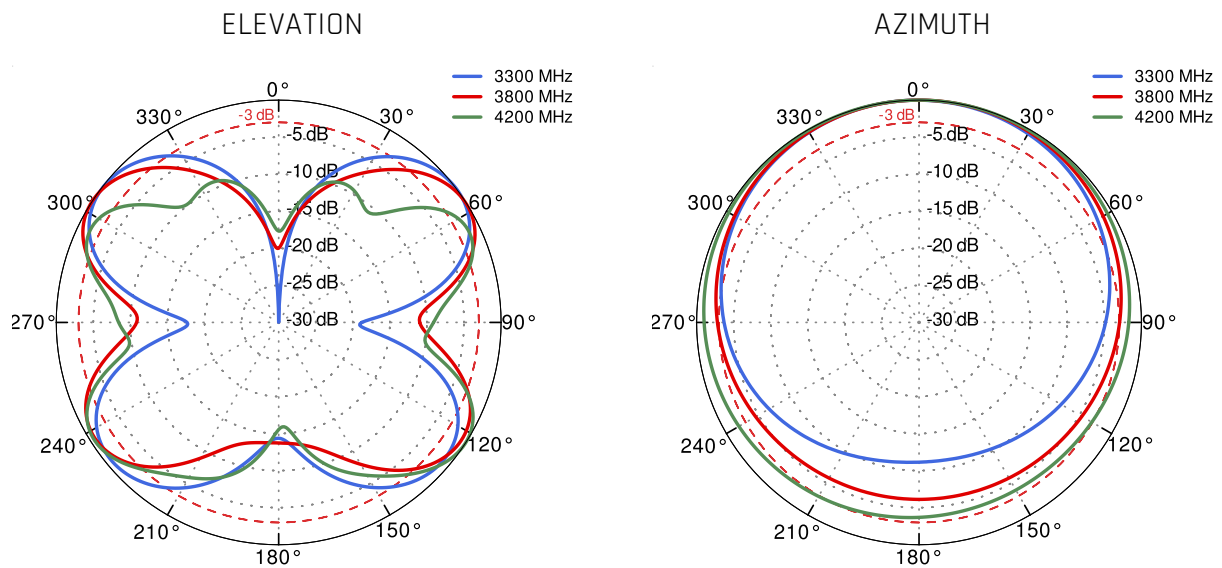

5G/LTE from 4.6 GHz to 5.5 GHz



Wi-Fi 2.4GHz

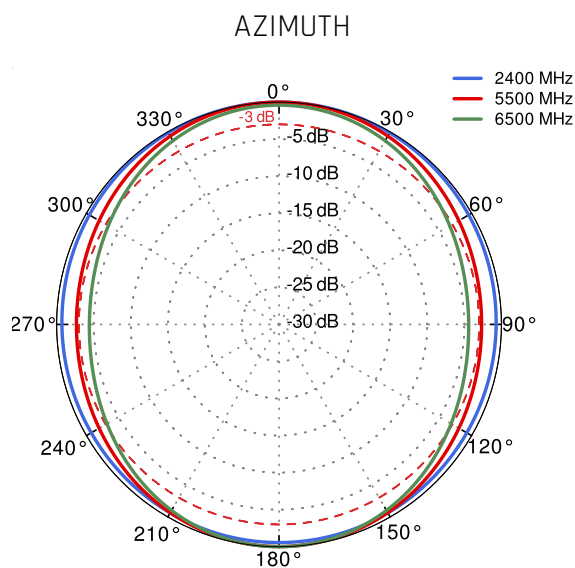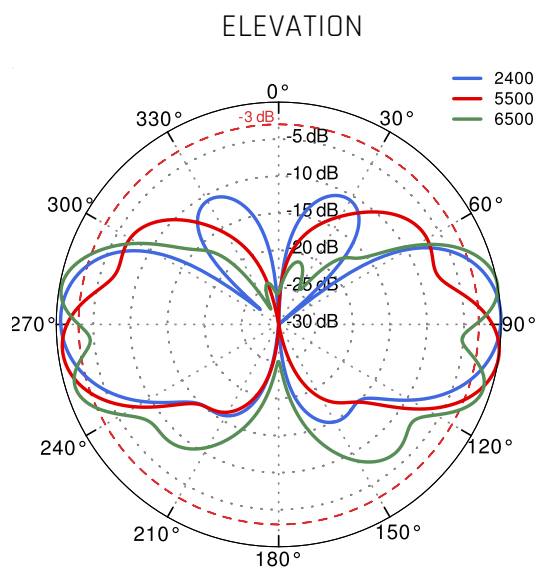

DIMENSIONS

