

# QuMax Omni for Robustel R5020 Lite

## INTEGRATED MULTI-BAND 5G OMNI ANTENNA + WIFI OMNI ANTENNA + PLACE TO INSTALL ROBUSTEL R5020 Lite (ALL-IN-ONE)

QuMax Omni all-in-one antenna for Robustel R5020 Lite router is a perfect outdoor device for mobile and fixed installations like industrial, public, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded omni 4\*5G and 2\*Wi-Fi antenna. If you use R5020 Lite with QuMax Omni antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection.

Wi-Fi 6E support!

**5G****Wi Fi 6E**  
**694-6000MHz**  
**7 dBi**  
**OMNI  
DIRECTIONAL**  
**IP 67**  
**-40° TO +80°**

OUTDOOR ANTENNA WORKS IN ANY  
WEATHER CONDITIONS, IP67




ANTENNA PERFECTLY MATCHED WITH  
THE ROBUSTEL R5020 LITE



ALL ANTENNAS AND ROBUSTEL  
ROUTER INTEGRATED IN ONE  
ENCLOSURE



MADE IN **EUROPE**

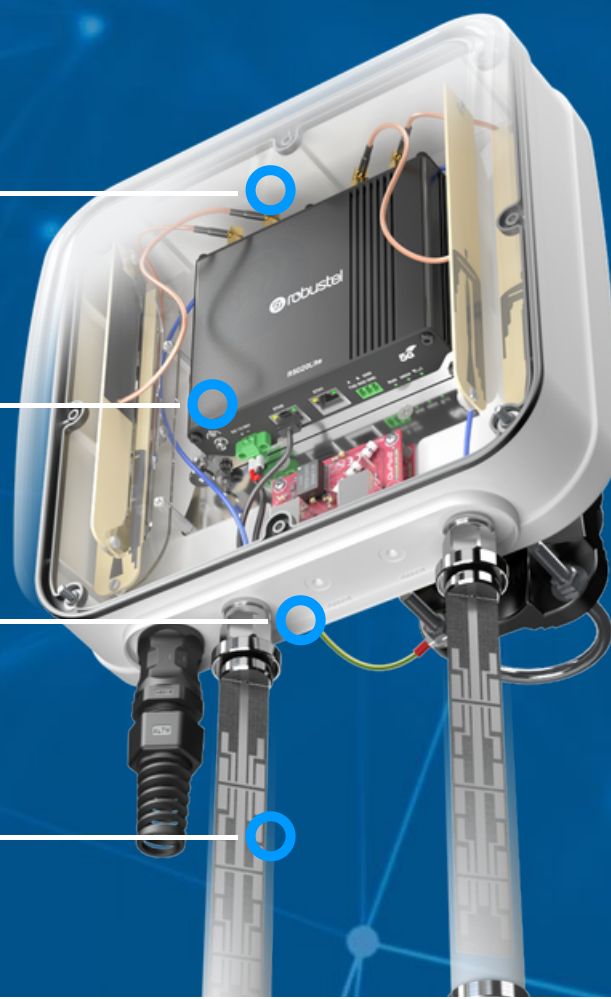

## 5G / LTE SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 : 2.5dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 47, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n47, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6 dBi 5.0 - 6.0 GHz: 7.5 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## MECHANICAL SPECIFICATION

MATERIAL	BS, aluminum, PTFE, Fiberglass
INGRESS PROTECTION	IP67
CONNECTOR TYPE	RJ45
DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg 3.97 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0.6 - 0.8 Nm

## MOUNTING KIT

### DIMENSIONS

9.9 x 10.5 x 14.8 cm  
3.9 x 4.13 x 5.83 inch

### REGULATION RANGE

+/- 30°

### MAST DIAMETER RANGE

25 - 66mm  
0.98-2.60 inch

### MATERIAL

Polyamide with fiberglass + galvanized steel U-Bolts

### WEIGHT


0.87kg

### MOUNTING PLACE


Wall or mast or ceiling

## PLOTS


### 5G/LTE VSWR

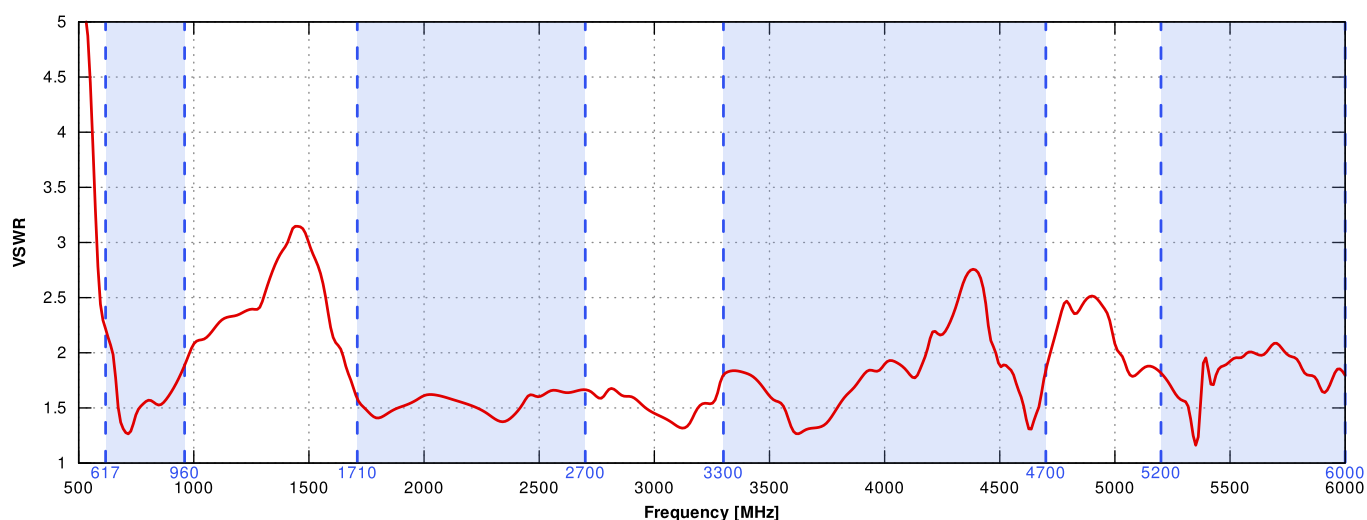


## WI-FI VSWR

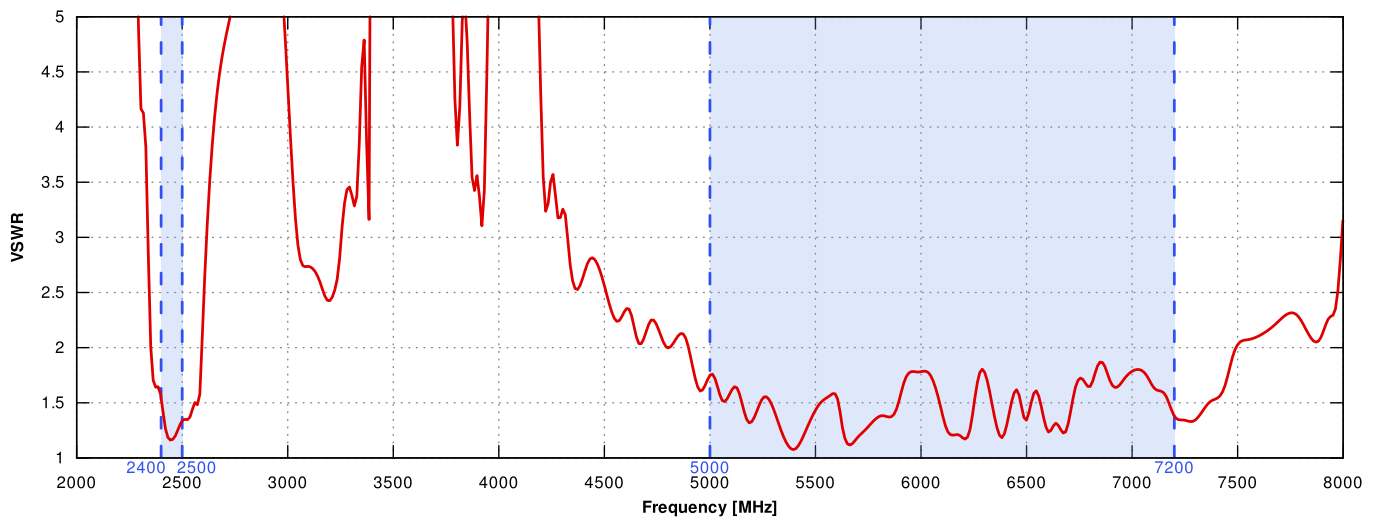


## 5G/LTE Gain

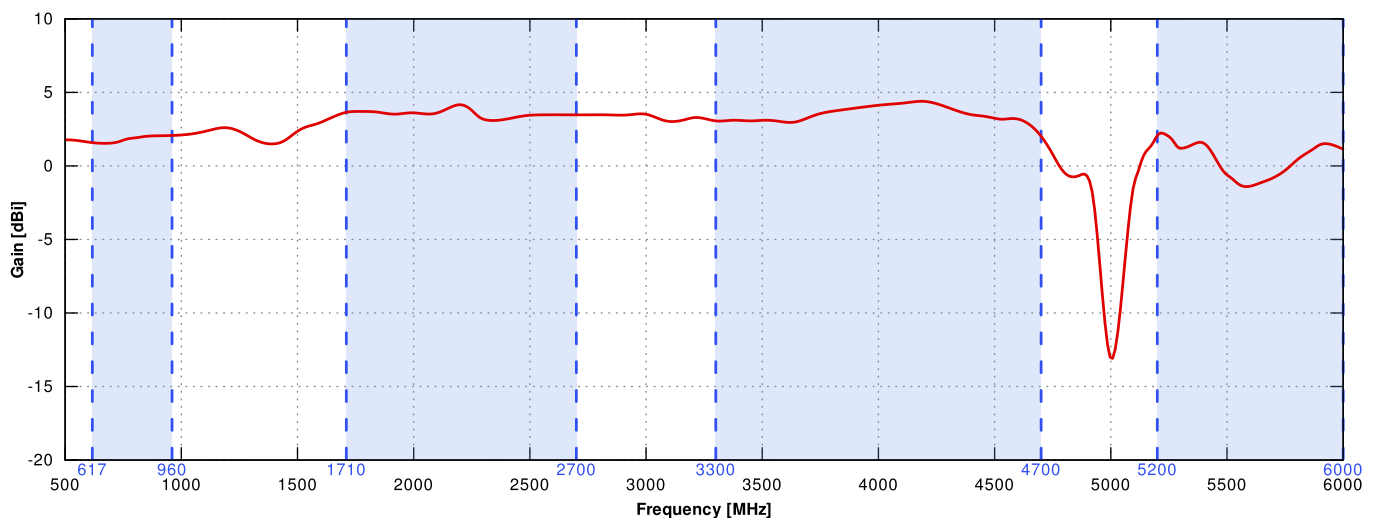


Wi-Fi Gain

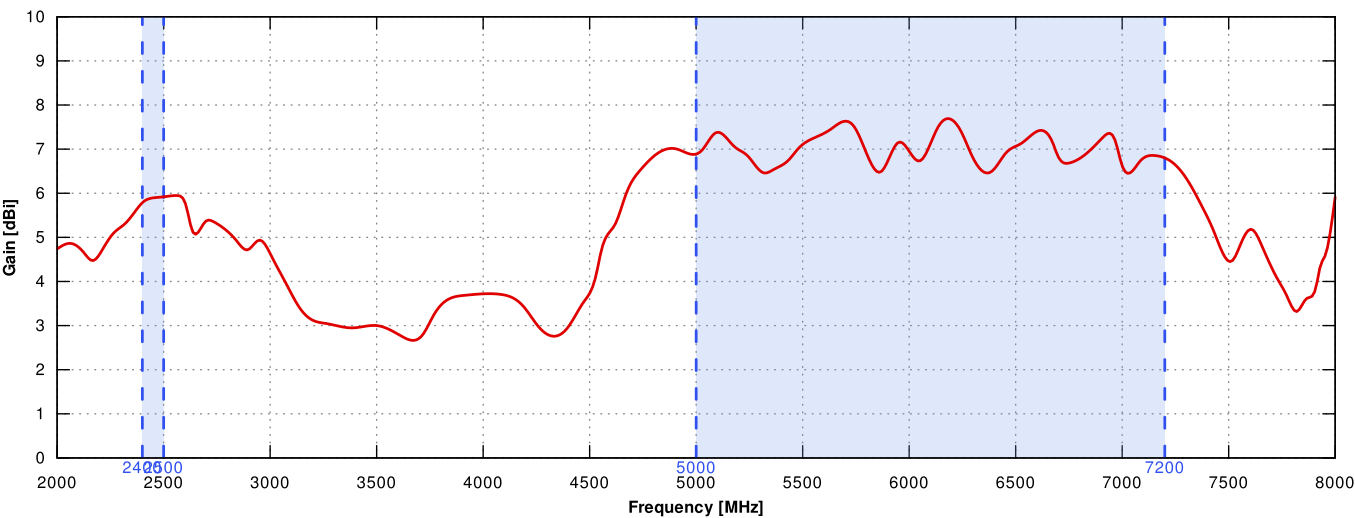


5G/LTE from 650MHz to 950MHz

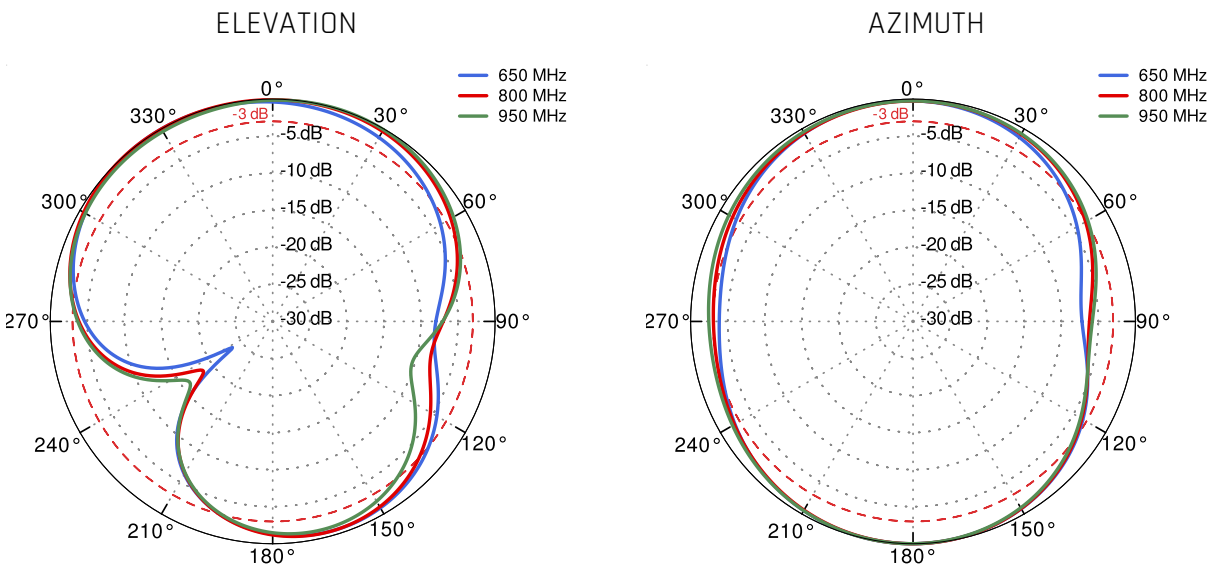


## 5G/LTE from 1.71GHz to 2.5GHz

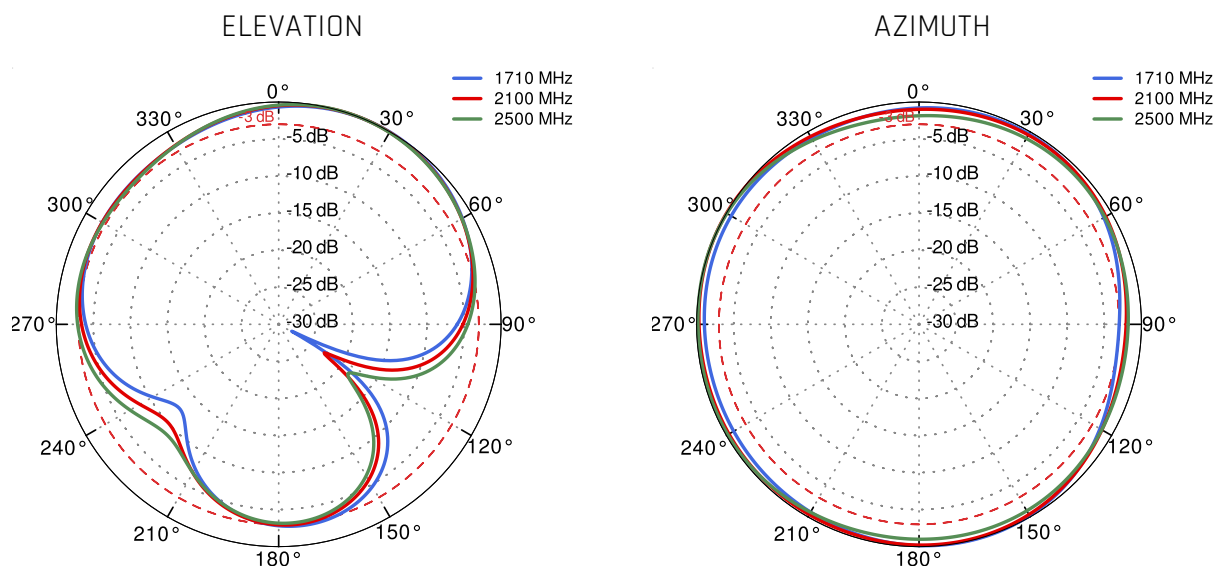


## 5G/LTE from 3.3GHz to 4.0GHz

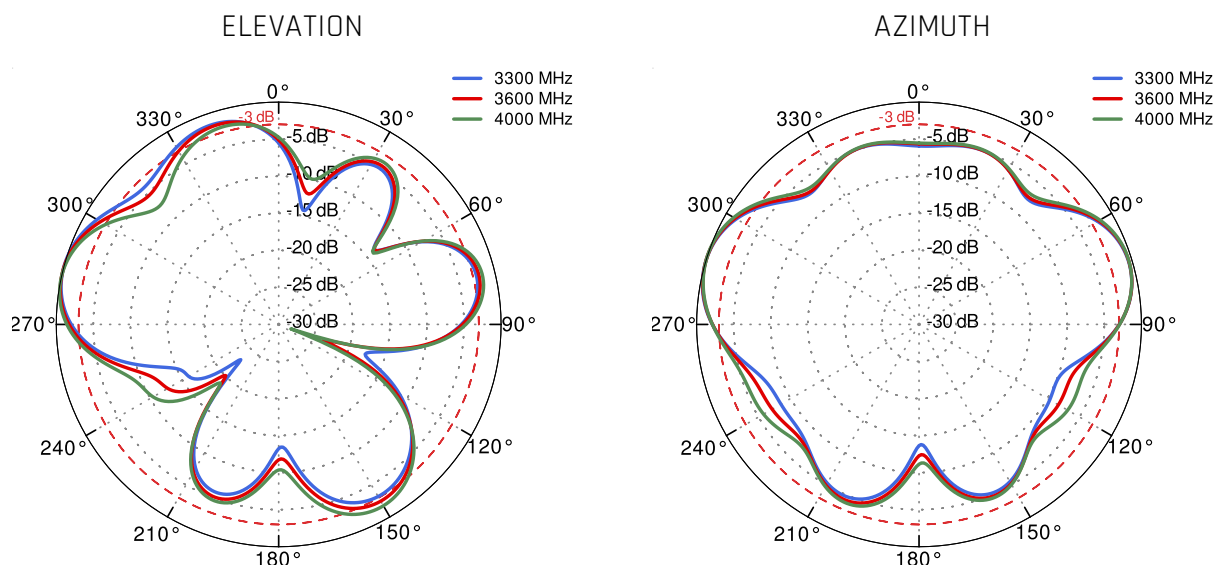

## 5G/LTE from 4.5GHz to 5.5GHz

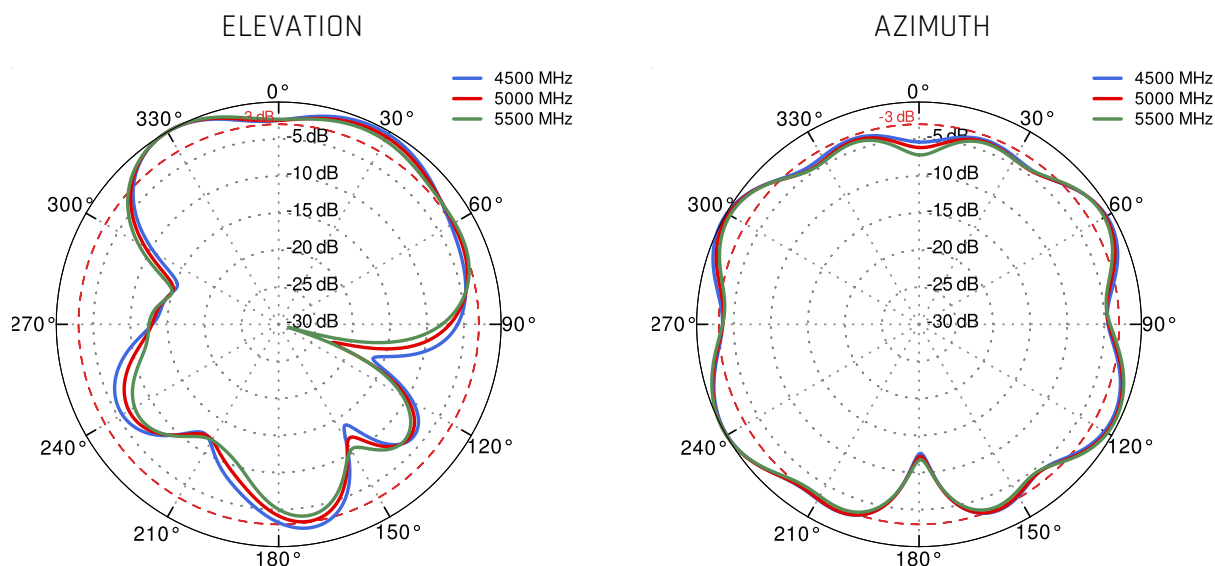

## Wi-Fi 2.4GHz and 5GHz and 6GHz

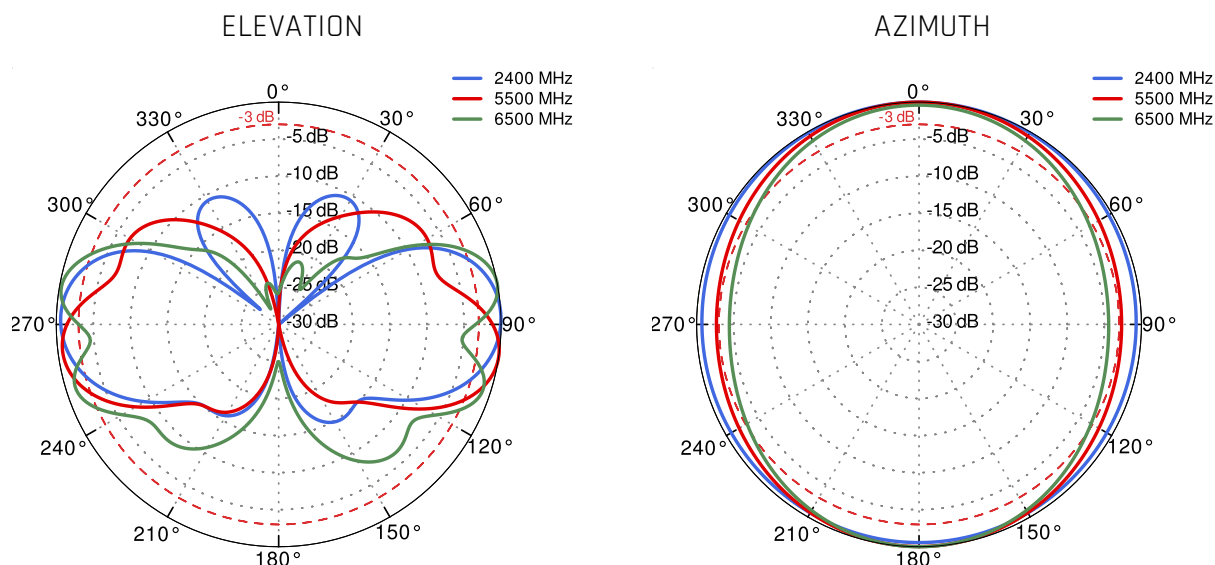

## DIMENSIONS

