

QuMax for Robustel R1520-LG

INTEGRATED LORA ANTENNA + WIFI OMNI ANTENNA + MULTI-BAND LTE OMNI ANTENNA + PLACE TO INSTALL ROBUSTEL R1520-LG (ALL-IN-ONE)

QuMax all-in-one antenna for Robustel R1520-LG router is the perfect choice for extending the reach and reliability of your Long Range (LoRa) wireless communication networks. It has embedded omni LTE, omni Wi-Fi and LoRa antenna. If you use R1520-LG with QuMax antenna, you get an integrated complete solution with embedded gateway and multi band antennas in one enclosure.

4G
LTE**Wi Fi** 6E

2x2 MIMO

694-2700MHz

4 dBi

HELIUM

868MHz

IP 68

-40° TO +80°



OUTDOOR ANTENNA WORKS IN **ANY**
WEATHER CONDITIONS, IP68



MOUNTING SYSTEM WITH TWO
PLANES, 60 DEGREES REGULATION




ANTENNA PERFECTLY MATCHED WITH
THE ROBUSTEL R1520-LG



ALL ANTENNAS AND ROBUSTEL
ROUTER INTEGRATED IN ONE
ENCLOSURE



MADE IN **EUROPE**

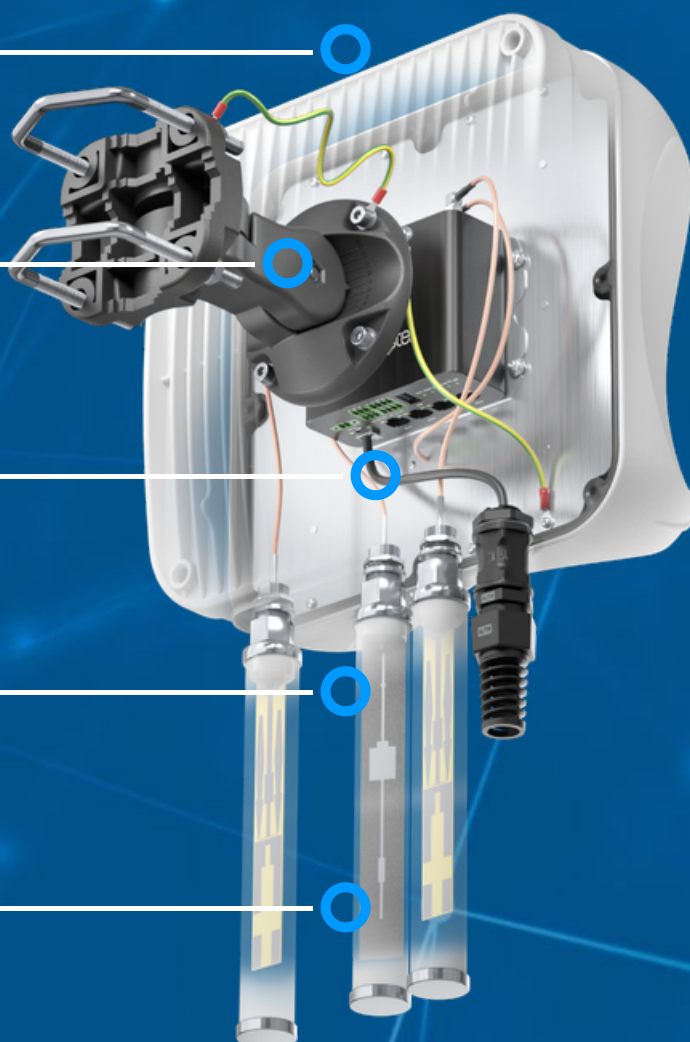

LORA ANTENNA SPECIFICATION

FREQUENCY	868 MHz (EU868, IN865, RU864)
GAIN	8.5 dBi
VSWR	<1.80, max <2.00
BEAMWIDTH	75°/75° ±10°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
FRONT TO BACK	>17 dB

LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 3 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 33, 34, 35, 36, 37, 38, 39, 44, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n95, n98, n100, n101, n256
VSWR	<1.50, max <2.50
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.125 GHz
GAIN	2.40 - 2.50 GHz : 6 dBi 5.0 - 7.125 GHz : 7.5 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° +/- 5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0,6 - 0,8 Nm
MAST DIAMETER	25-66mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G GSM

617 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	85	n81	n82	n83	
	n89							

LTE / 4G UMTS

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	59	
	62	n80	n84	n86	n95			

LTE / 4G WCS DARS


2300 MHz	30	40					2400 MHz
-------------	----	----	--	--	--	--	-------------

LTE / 4G


2400 MHz	7	38	41	53	69	n90	2700 MHz
-------------	---	----	----	----	----	-----	-------------

PLOTS


LTE VSWR

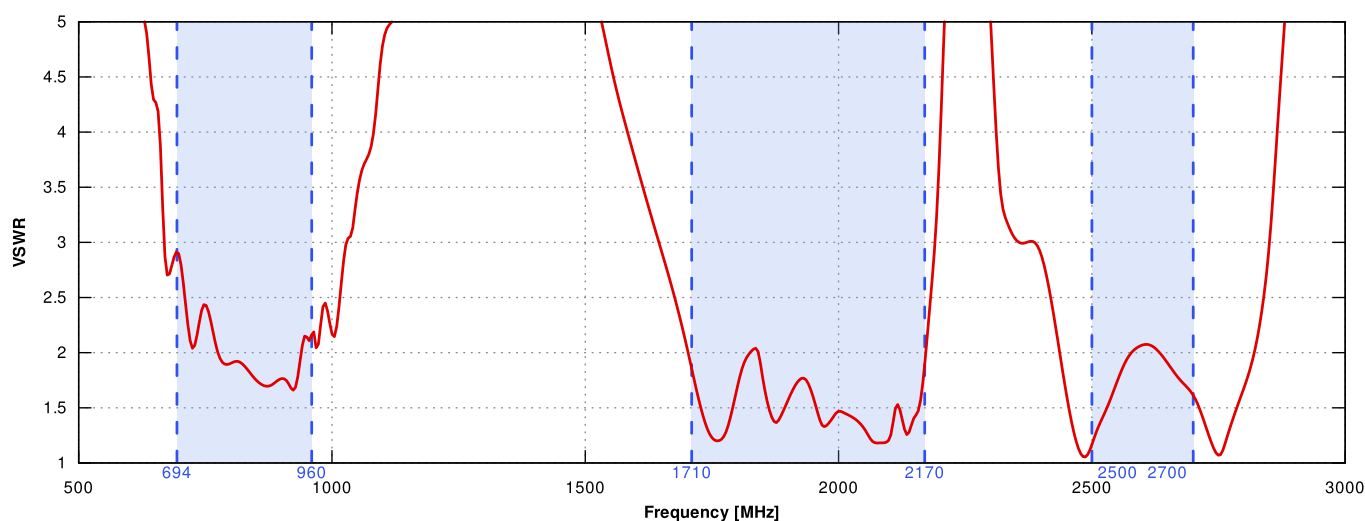


LTE Gain

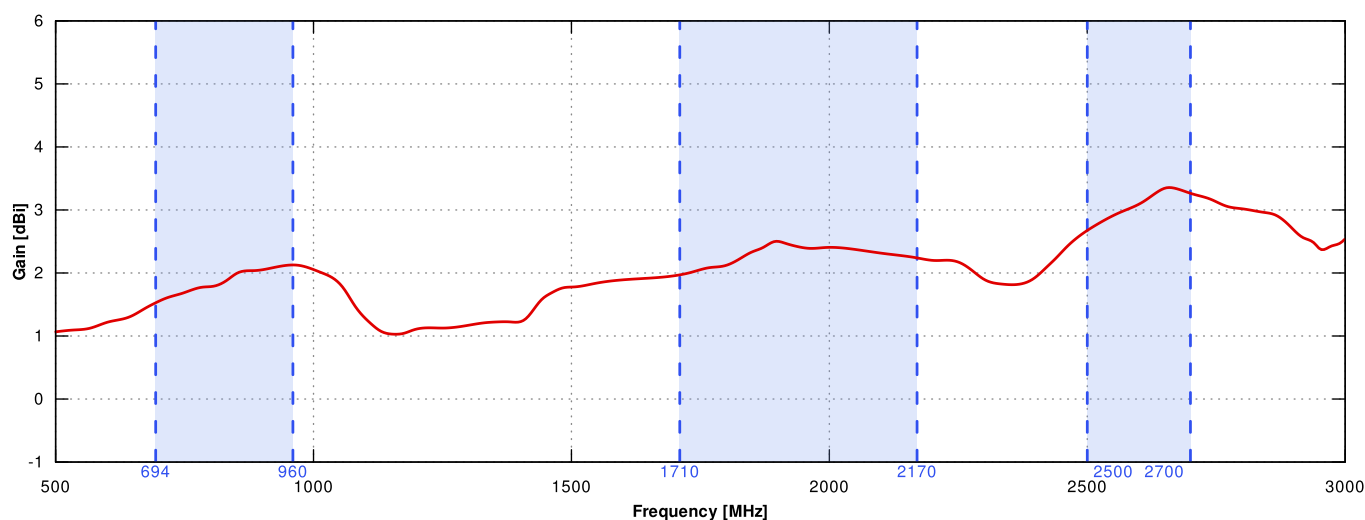


LoRa VSWR

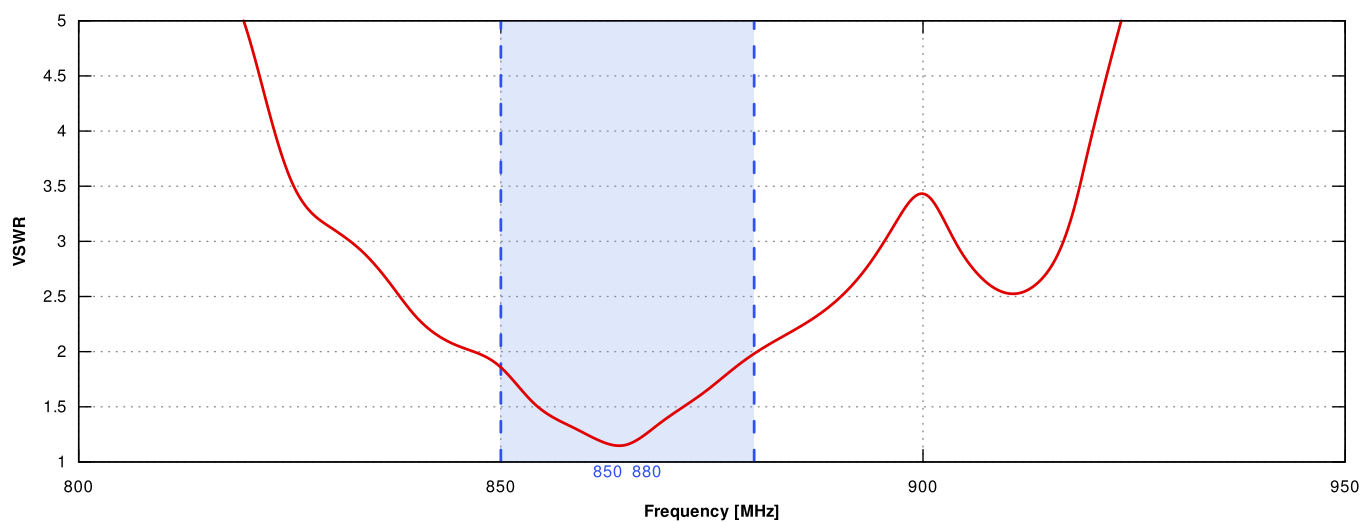


LoRa Gain

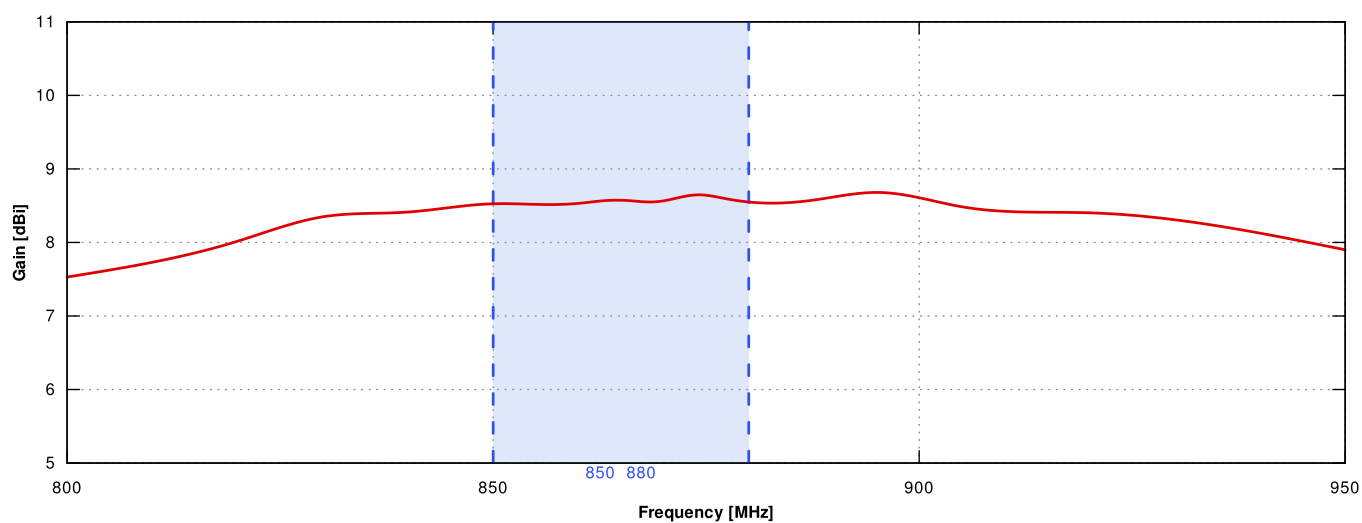



Wi-Fi VSWR

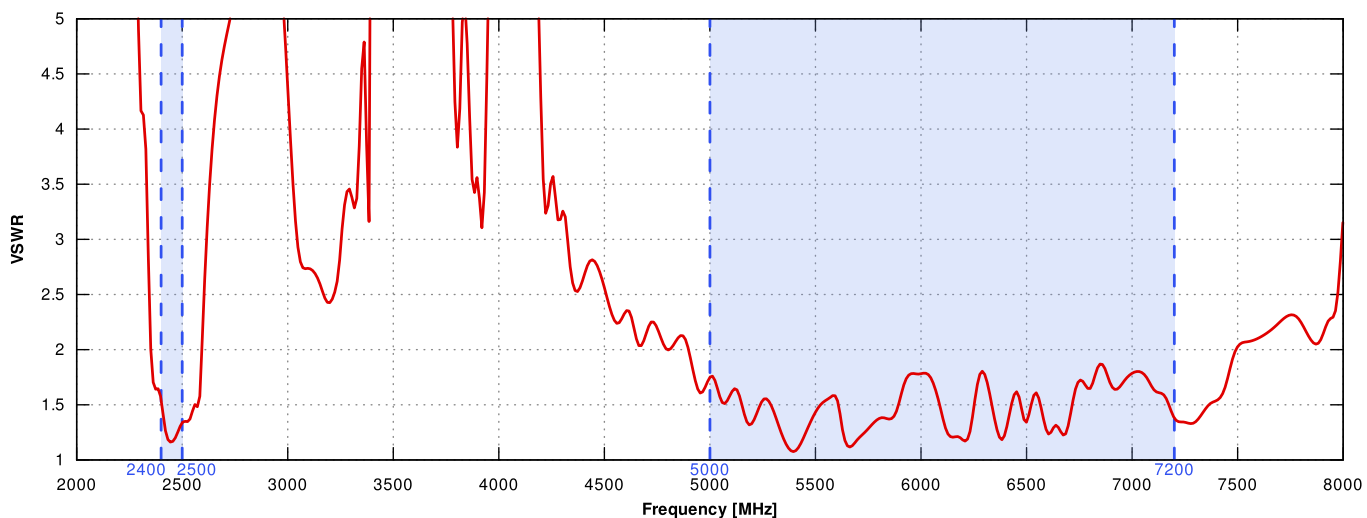



Wi-Fi Gain

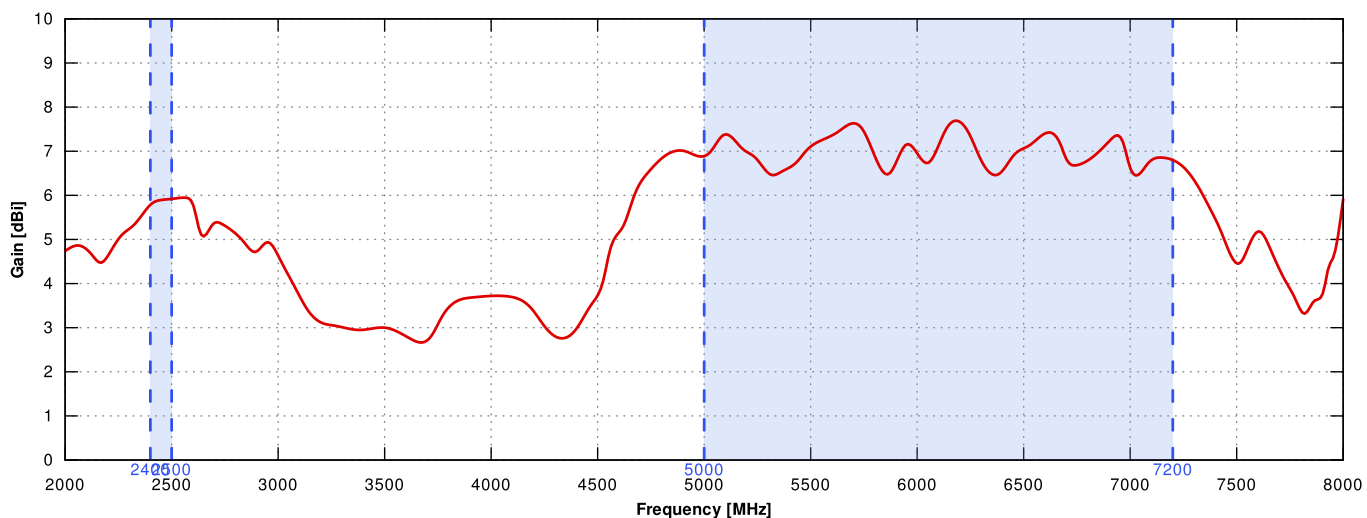



LTE From 700MHz to 900MHz

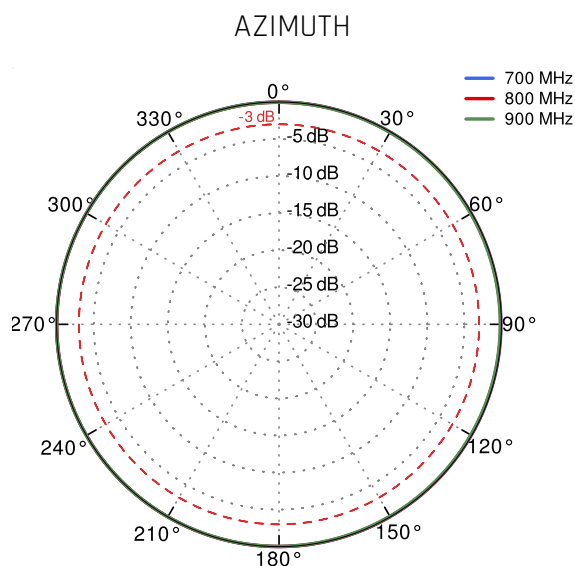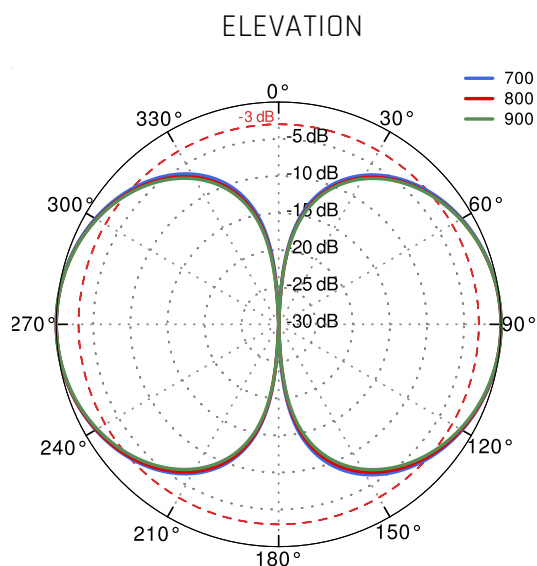



LTE From 1.71GHz to 2.17GHz

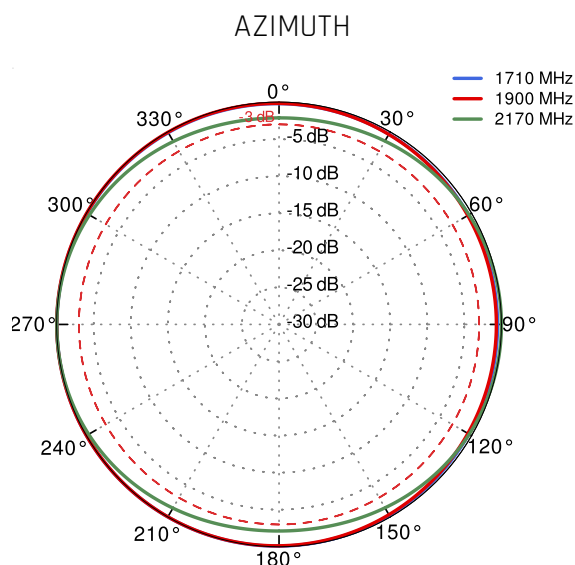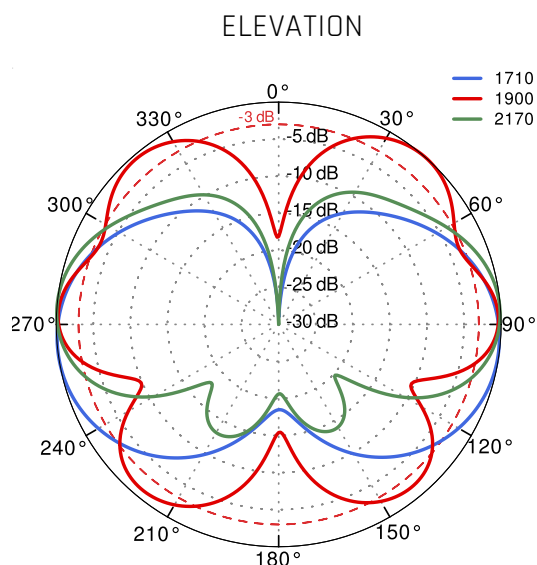


LTE From 2.3GHz to 2.7GHz

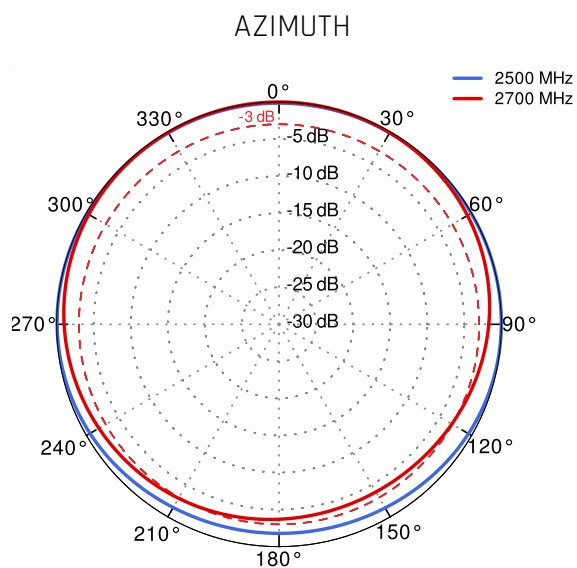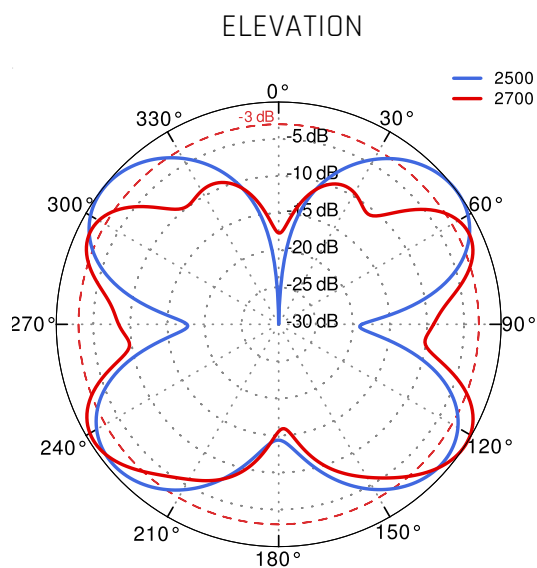

LoRa 868 MHz

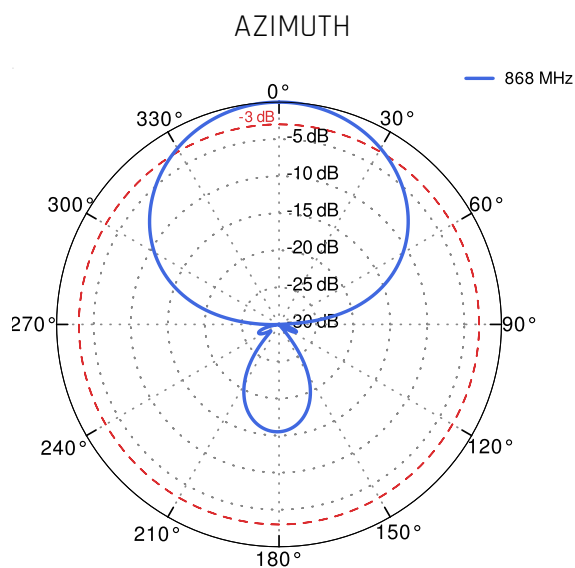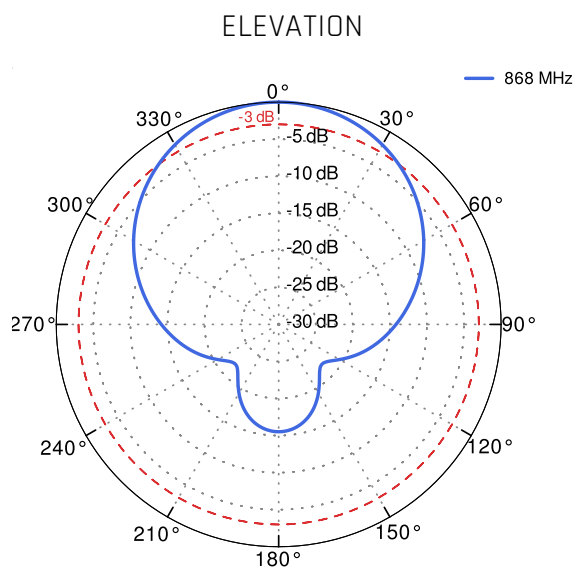

Wi-Fi From 2.4 GHz to 6.5 GHz

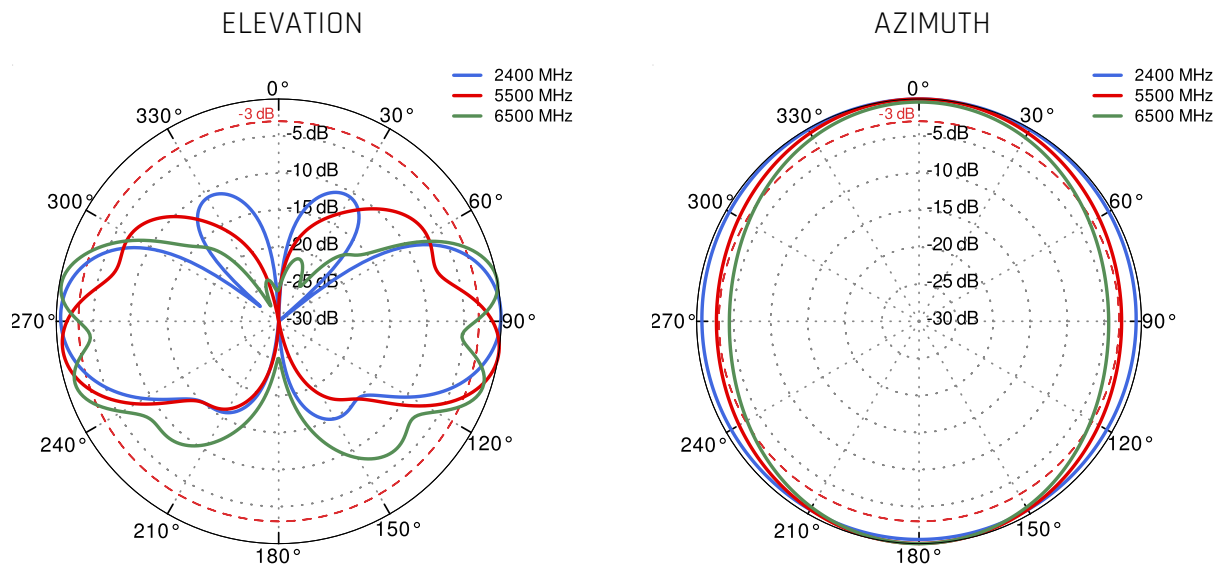

DIMENSIONS

