

QuPanel LTE HP MIMO 4x4

Directional High Power multiband LTE MIMO 4x4 antenna

QuPanel LTE directional MIMO 4x4 high gain antenna is predicted for 4G LTE high categories from cat 5 up to cat 19. The antenna improves the signal in rural/suburban and locations where the mobile signal is weak. That antenna is predicted to be installed on the buildings (on the pole or on the wall). Due to very wide working frequency range, the antenna is universal client for LTE bands like LTE700/800/1800/1900/2100/2300/2600. It's compatible with all MIMO 4x4 LTE modems and routers working in categories: cat 5, cat 6, cat 7, cat 9, cat 10, cat 11, cat 12, cat 13, cat 15, cat 16, cat 18, cat 19, cat 20.

4G
LTE**4x4 MIMO**
694-2700MHz
7 dBi
DIRECTIONAL
IP 67
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67



MOUNTING SYSTEM WITH TWO
PLANES, 60 DEGREES REGULATION



FOUR SMA CONNECTORS



7 DBI GAIN



70° BEAMWIDTH



MADE IN EUROPE



LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 7 dBi 1.7 - 2.2 GHz : 7 dBi 2.2 - 2.7 GHz : 7 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.70, max <2.00
BEAMWIDTH	70°/70° ±15°
POLARIZATION	Dual polarized X-Pol
IMPEDANCE	50 Ω
FRONT-TO-BACK	>10 dB

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	4x SMA plug
INGRESS PROTECTION	IP67
DIMENSIONS	392 x 392 x 99 mm 15.43 x 15.43 x 3.90 inch
WEIGHT	3.7 kg 8.16 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
CABLE LENGTH	5m (P/N: APLM4-H) or 10m (P/N: APLM4-H1)
CABLE TYPE	LMR195 white
MAST DIAMETER	25-60mm 0.98-2.36 inch

FREQUENCY BANDS

LTE / 4G GSM

617 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	85	n81	n82	n83	
	n89							

LTE / 4G UMTS

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	59	
	62	n80	n84	n86	n95			

LTE / 4G WCS DARS

2300 MHz	30	40					2400 MHz
-------------	----	----	--	--	--	--	-------------

LTE / 4G

2400 MHz	7	38	41	53	69	n90	2700 MHz
-------------	---	----	----	----	----	-----	-------------


COMPATIBLE ROUTERS

VARIANTS: APLM4-H, APLM4-H1


TELTONIKA	RUTX12, RUTX14
ROBUSTEL	EG5200, R2000
COMSET	CM770W-6
DIGI	TX54 LTE-Advanced
ERICSSON (CRADLEPOINT)	IBR1700
FORTINET	FEX-311F, FEX-311F
PEPLINK	BR1 Pro (CAT-20), BR1 Pro CAT-20, MAX HD2, MAX HD2 Mini, MAX Transit, UBR Plus
ROBUSTEL	EG5200, R2000
TELTONIKA	RUTX12, RUTX14
OTHER	4 * SMA

PLOTS



VSWR

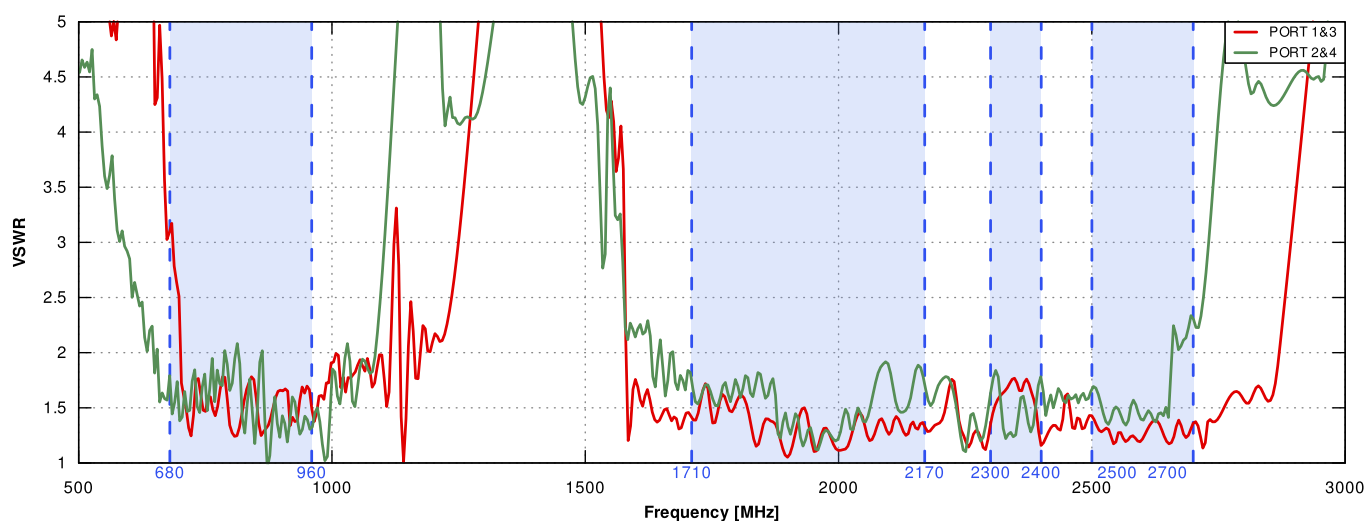



Gain

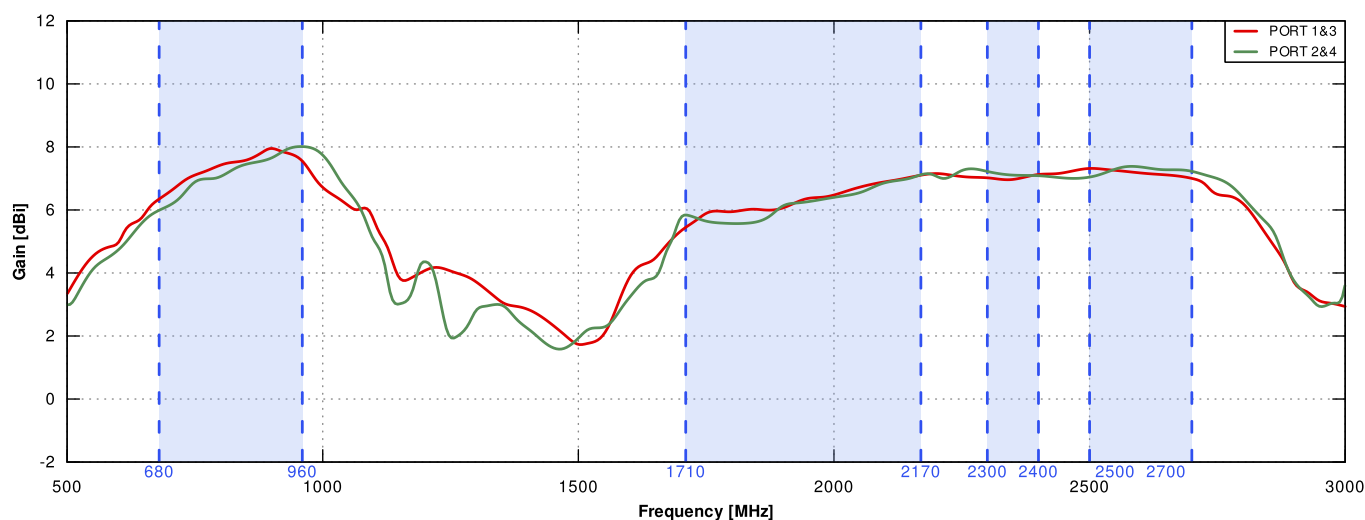



Port 1&3 700MHz to 900MHz

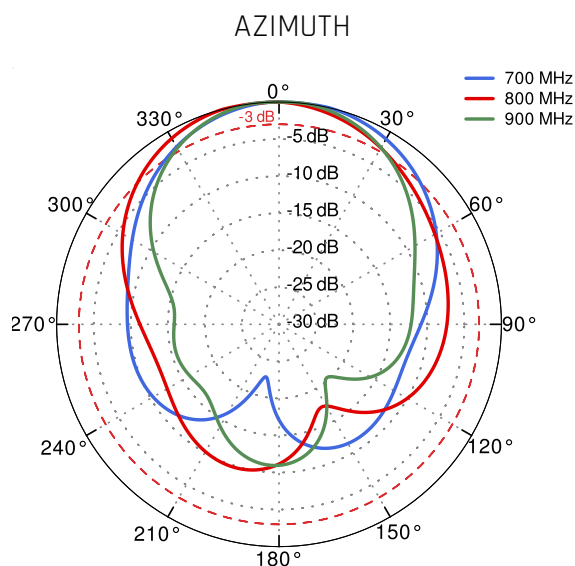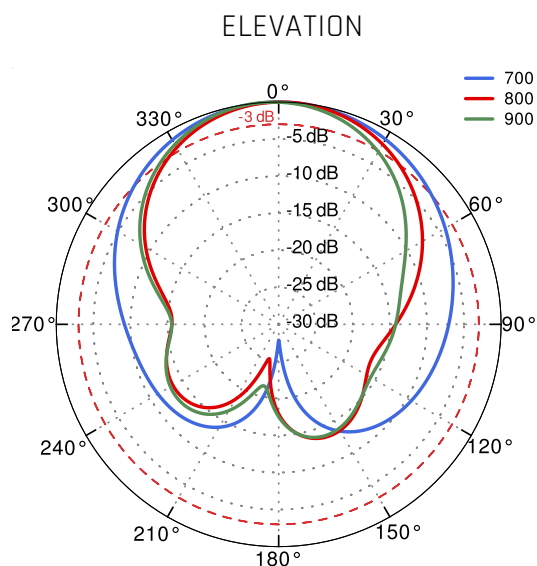



Port 1&3 1.71GHz to 2.17GHz

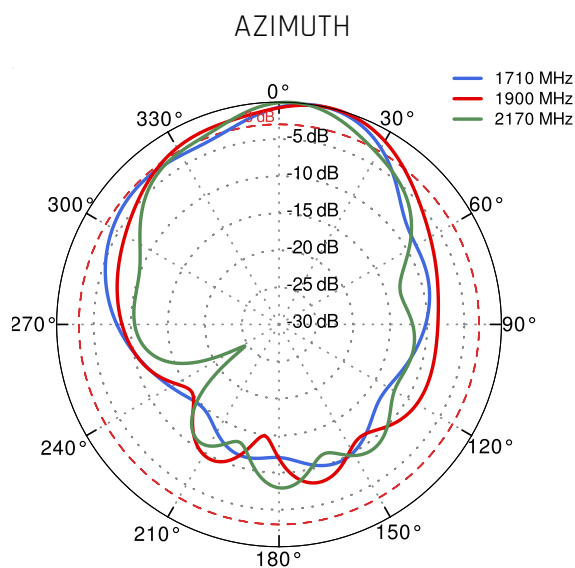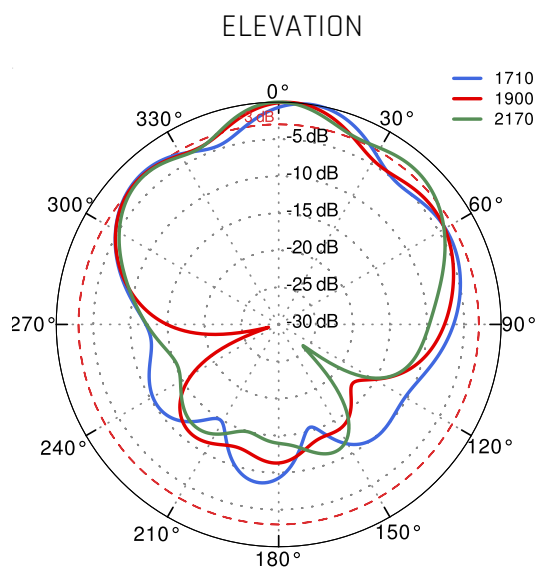



Port 1&3 2.3GHz to 2.7GHz

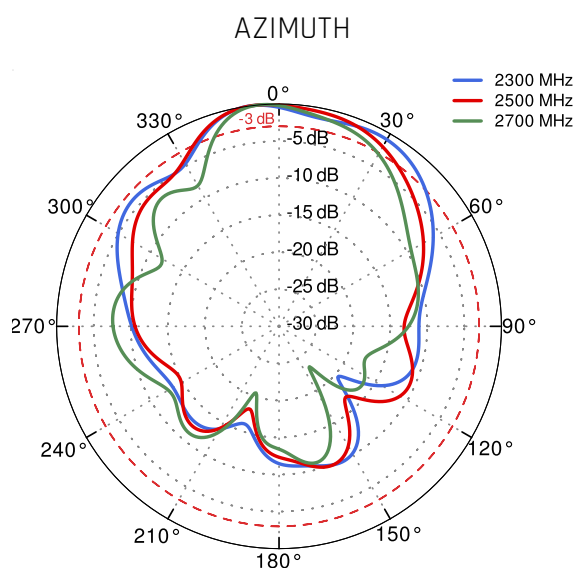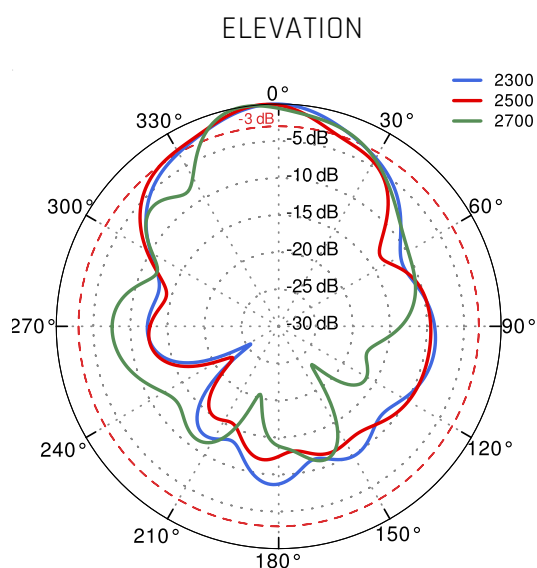



Port 2&4 700MHz to 900MHz

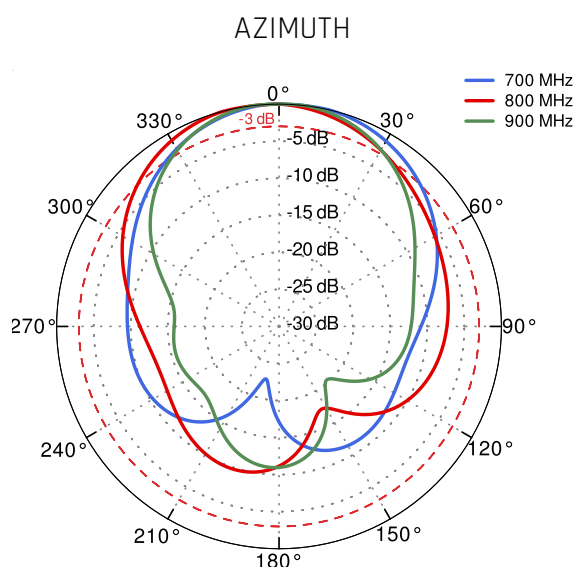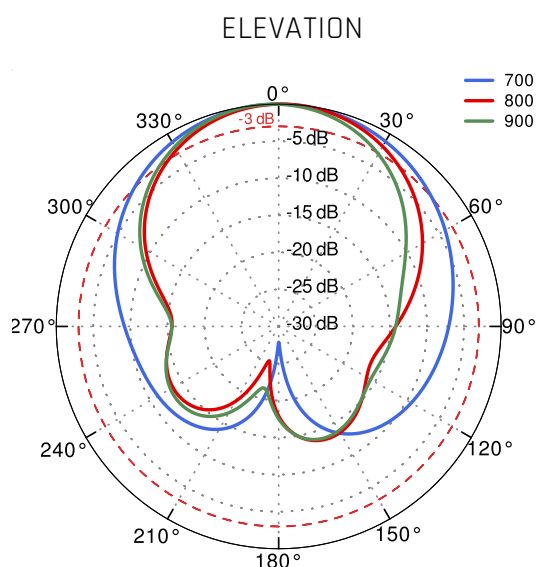

Port 2&4 1.71GHz to 2.17GHz

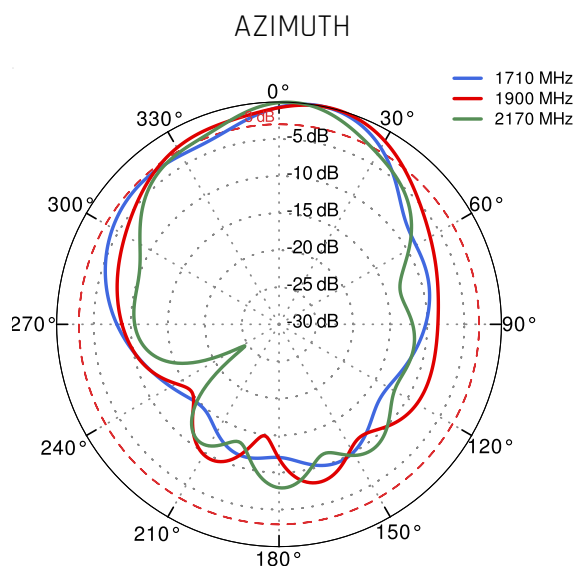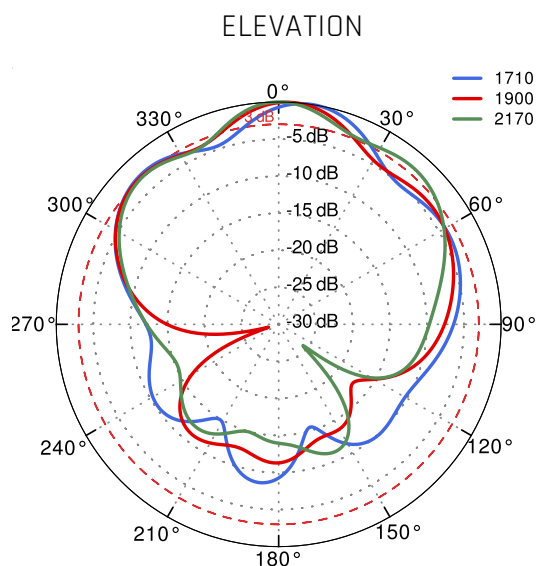

Port 2&4 2.3GHz to 2.7GHz

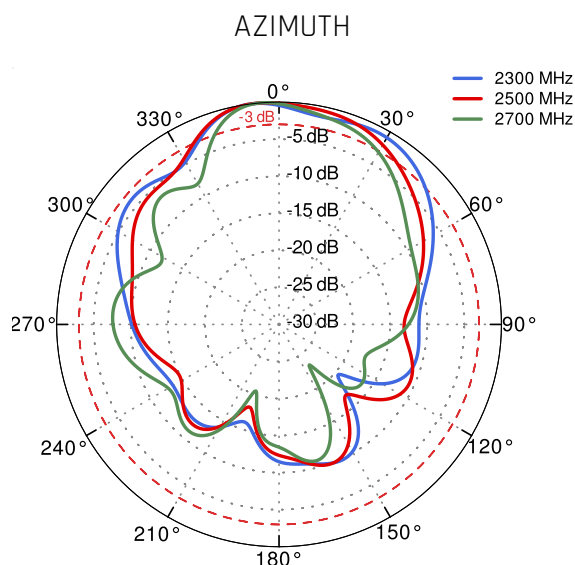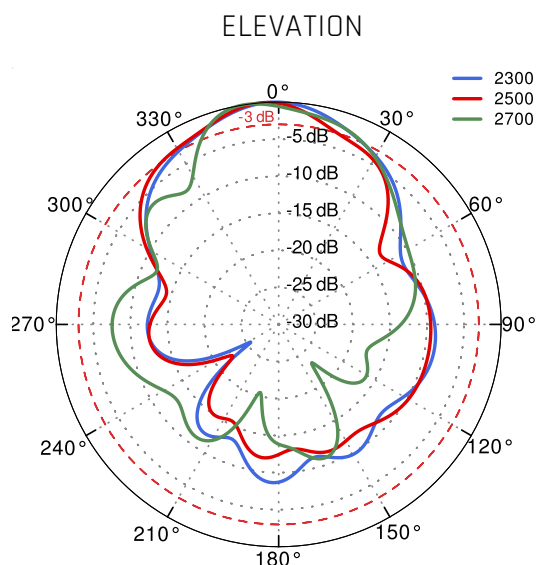

DIMENSIONS

