

# QuSector 12HV-30-2

QuSector 12HV-30-2 offers a 30 degrees, 12dBi gain signal with two 2.4GHz+5GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

**-End of Life-** QuSector 12HV-30-2 is a dual band, concurrent, H&V polarity, MIMO 2x2 panel antenna. Two connectors operate at 2.4GHz+5GHz with 12dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. The antenna comes in the following configurations: with 2\*70cm (28inch) cables terminated with Nm, RPSMA, RPTNC connectors. QuSector 12HV-30-2 was designed to be a perfect match for your access point.

**WE REGRET TO INFORM YOU THAT THE PRODUCT HAS REACHED ITS END OF LIFE (EOL). A NEWER AND BETTER VERSION IS NOW OUT. CHECK IT OUT HERE: [QuSector 14HV-30-2 Wi-Fi 6e](#)**

**END OF LIFE**



OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



WALL OR MAST MOUNTING SYSTEM  
WITH **TWO PLANES, 60 DEGREES**  
REGULATION



MADE IN **EUROPE**



## **WI-FI SPECIFICATION**

<b>FREQUENCY</b>	2.4 - 2.5GHz 5.1 - 5.9GHz
<b>GAIN</b>	12 dBi
<b>VSWR</b>	< 2.00
<b>BEAMWIDTH</b>	35°/35°
<b>POLARIZATION</b>	Horizontal Vertical
<b>IMPEDANCE</b>	50 $\Omega$
<b>SEPARATION BETWEEN CONNECTORS</b>	>25dB
<b>FRONT-TO-BACK</b>	> 20dB > 25dB
<b>MAX INPUT POWER</b>	50W
<b>DC GROUND</b>	Yes

## **MECHANICAL SPECIFICATION**

<b>MATERIAL</b>	ABS
<b>CONNECTOR</b>	2xRPSMA/2xNM/2xRPTNC
<b>OUTER DIMENSIONS</b>	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
<b>WEIGHT</b>	1.8 kg
<b>OPERATING TEMPERATURE</b>	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

## COMPATIBLE ROUTERS

VARIANT: S12HV.30.2RS

TELTONIKA	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTM10, RUTM11, RUTM51, RUTX10, RUTX11, RUTX12, RUTX50
ROBUSTEL	EG5100, EG5120, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
ACKSYS	AirBox LTE, AirBox/10, AirLink, AirWan, AirXroad, AirXroad/4P
ADVANTECH	EKI-1361(-MB) EKI-1362, EKI-6233BN, EKI-6333AC-2GD
ANYBUS	Wireless Router WLAN
ARUBA	AP-204, AP-504, IAP-204, RAP-108
CRADLEPOINT	IBR600C, IBR900, R1900, R920, S700
D-LINK	DAP-1665, DAP-2020, DAP-2310, DAP-2360, DIS-2650AP, DWL-8720AP, N300 4G

<b>DIGI</b>	TX54 LTE-Advanced
<b>ENGENIUS</b>	ENS500EXT
<b>EXTREME NETWORKS</b>	AP 7522, AP 7522E, AP122X, AP305CX
<b>FORTINET</b>	FAP-233G, FAP-U432F
<b>HUAWEI</b>	AP4051DN, AP4130DN, AP4151DN
<b>MERU</b>	AP1010E
<b>MIKROTIK</b>	L009UiGS-2HaxD-IN, RB922
<b>MOXA</b>	AWK-1131A Series, AWK-1137C Series, AWK-1151C Series, AWK-3131A Series, AWK-3252A Series
<b>PEPLINK</b>	AP One Rugged, B One, Balance 20X, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Pro 5G, MAX Transit, MAX Transit Duo Pro, UBR Plus
<b>PERLE</b>	IOLAN SCG W Secure Console Server, IOLAN SCG WM Secure Console Server, IOLAN SDG W Serial Device Servers
<b>ROBUSTEL</b>	EG5100, EG5120, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite
<b>SEMTECH (SIERRA WIRELESS)</b>	AirLink RV55, AirLink RX55, RV55, XR60
<b>TELTONIKA</b>	RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTM10, RUTM11, RUTM51, RUTX10, RUTX11, RUTX12, RUTX50
<b>WAVETEL</b>	W240 4G/LTE, W2400 LTE , W3600 4G/LTE Dual WAN, WNR320 5G, WNR340 5G, WNR5501 5G
<b>WLINK</b>	ER120, G200, G230, G530, G530
<b>ZYXEL</b>	NWA55AXE
<b>OTHER</b>	2 * RPSMA

VARIANT: S12HV.30.2NM

<b>RAJANT</b>	BreadCrumb ES1-2450IS, BreadCrumb ES1-2450CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2255C, BreadCrumb LX5-2295C, BreadCrumb LX5-2455D, BreadCrumb LX5-2955C, Hawk BreadCrumb FE1-2450 / FE1-2450A, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-2450CS
<b>ACKSYS</b>	RuggedAir100
<b>ANYBUS</b>	WLAN Access Point IP67
<b>D-LINK</b>	DBA-3621P
<b>EXTREME NETWORKS</b>	AP 3917
<b>MIKROTIK</b>	L11UG-5HaxD
<b>RAJANT</b>	BreadCrumb ES1-2450IS, BreadCrumb ES1-2450CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2255C, BreadCrumb LX5-2295C, BreadCrumb LX5-2455D, BreadCrumb LX5-2955C, Hawk BreadCrumb FE1-2450 / FE1-2450A, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-2450CS
<b>RUCKUS</b>	T350SE
<b>SIEMENS</b>	6GK5766-1GE00-7DB0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, Scalance W738 M12, Scalance W778-1 M12, Scalance W778-1 M12 EEC
<b>OTHER</b>	2 * N-male

VARIANT: S12HV.30.2RT

DIGI

WR44 RR

XIRRUS


XR-520H

OTHER


2 \* RPTNC

## PLOTS



VSWR

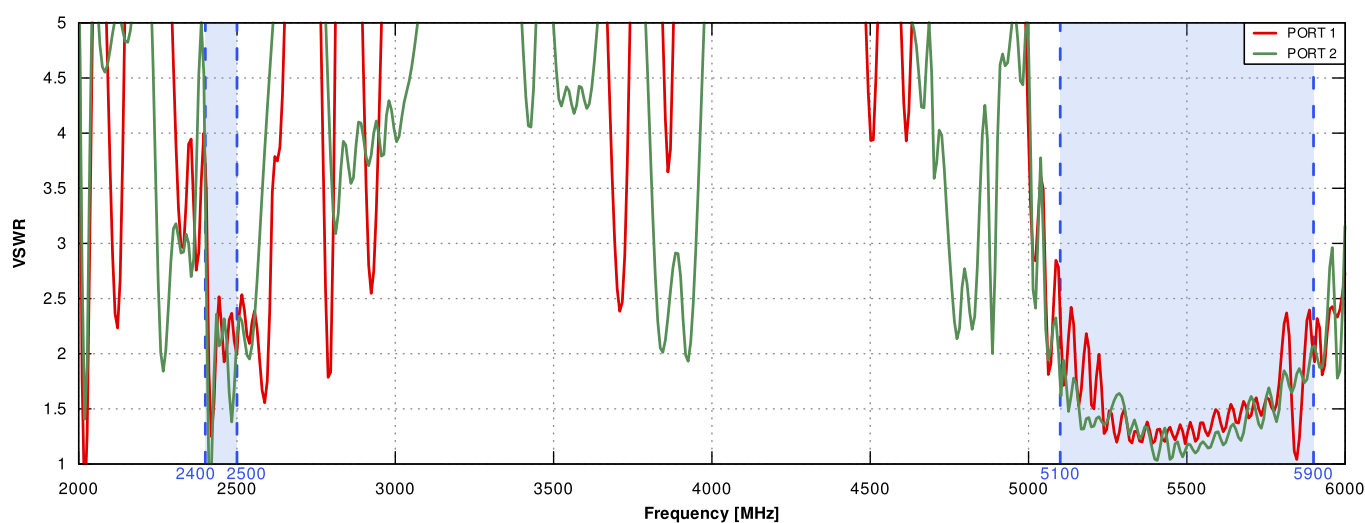



## Gain

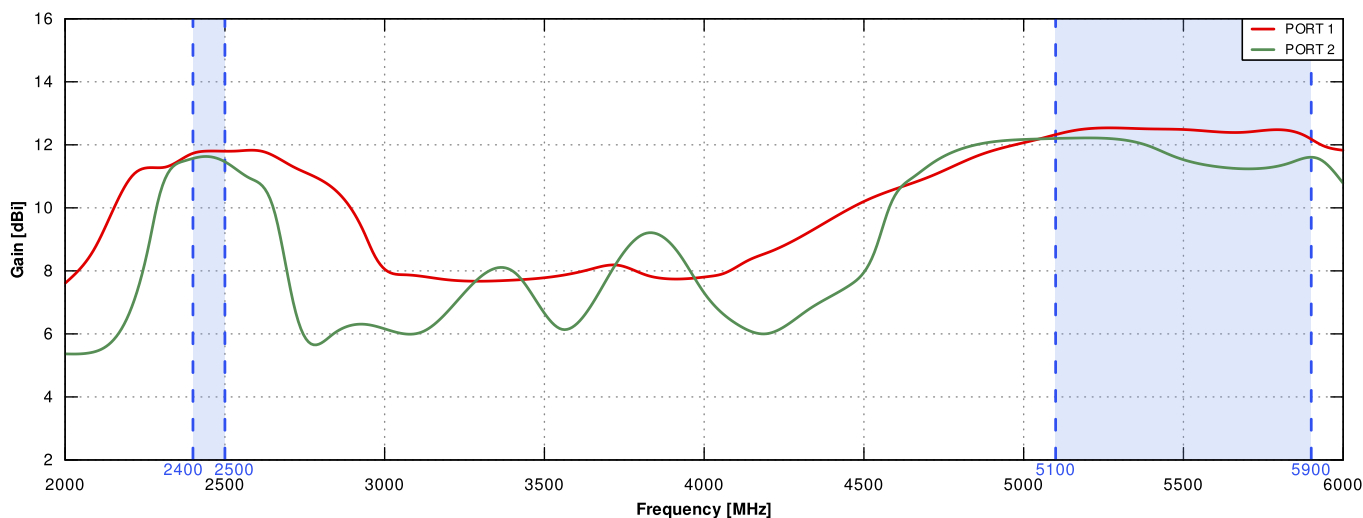



## PORT 1 - 2.4GHz

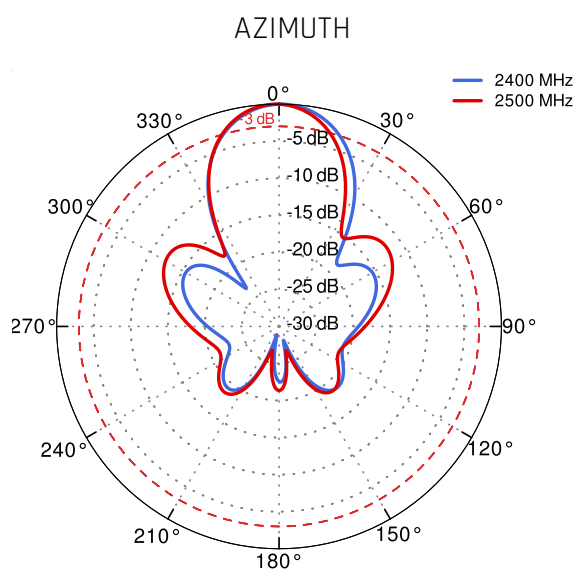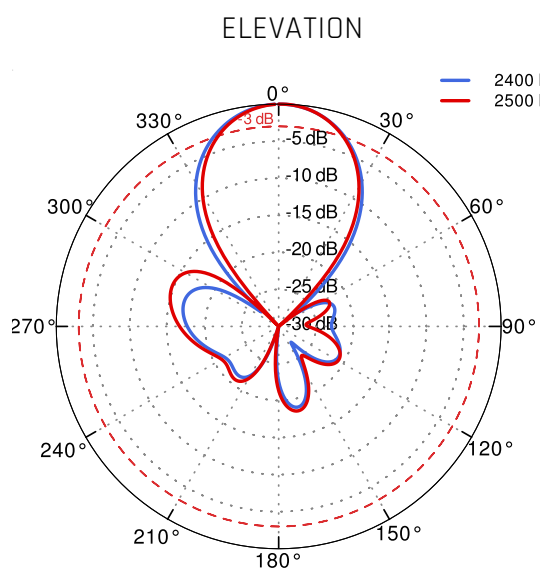

## PORT 1 - 5GHz

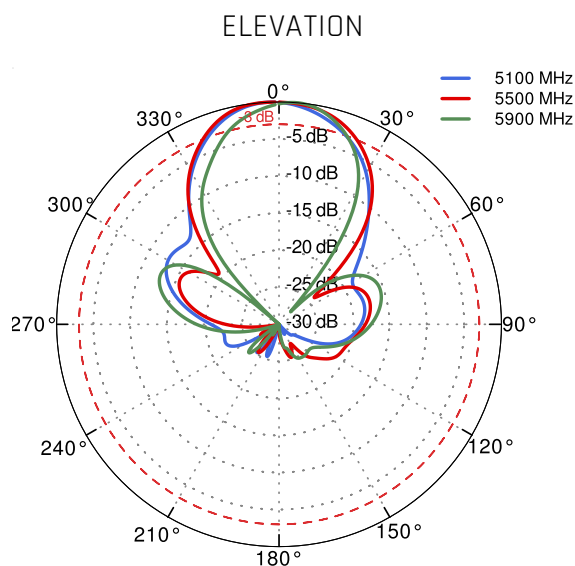
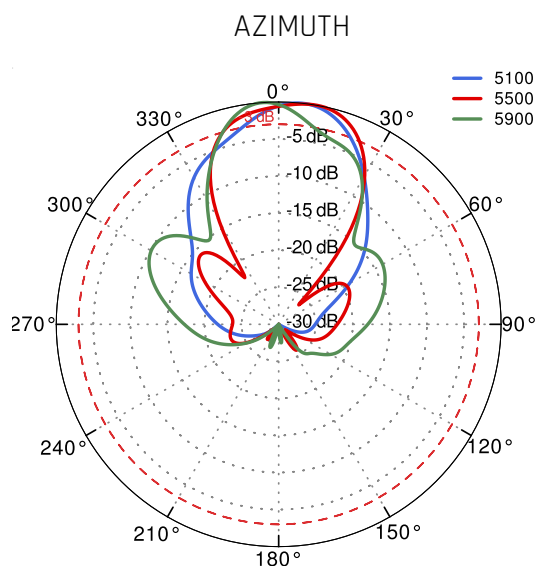


## PORT 2 - 2.4GHz

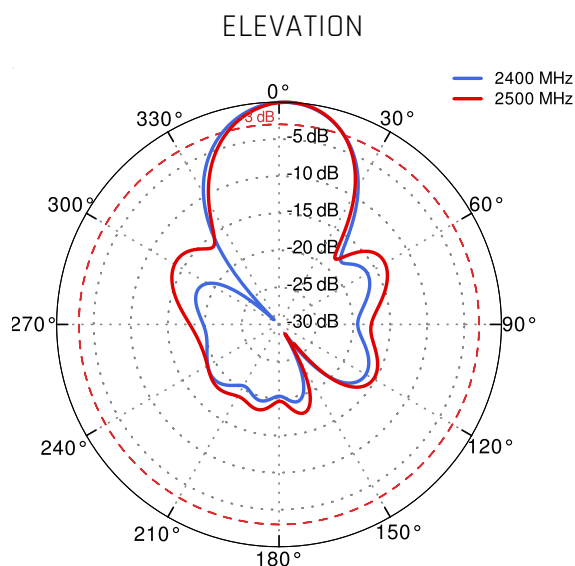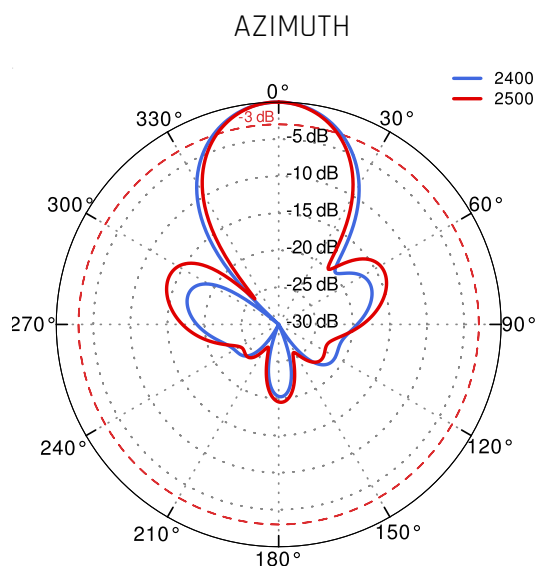



## PORT 2 - 5GHz

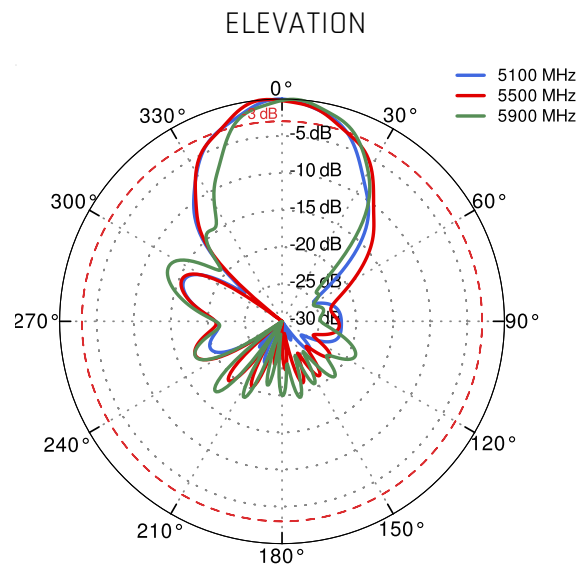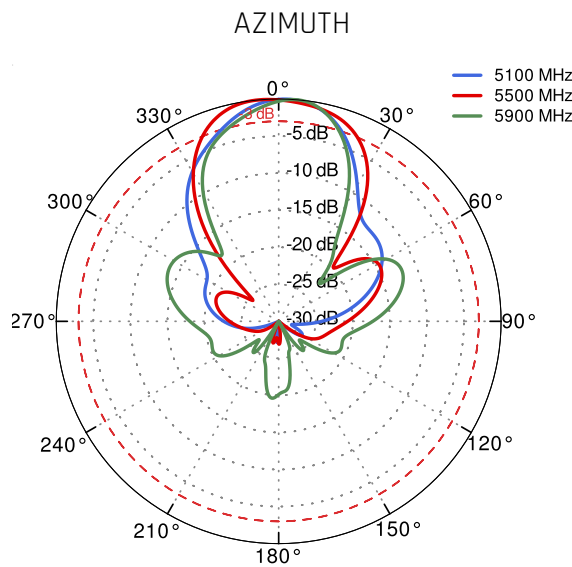

## DIMENSIONS

