


# QuSector 14HV-90-4 Nf Wi-Fi 6E

QuSector 14HV-90-4 offers a 90 degrees, 14dBi gain signal with two RP-SMA 2.4GHz and 5GHz+7GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 14HV-90-4 is a concurrent, dual-band, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at 2.4GHz with 12dBi gain and **5GHz + 7GHz** with 14dBi gain. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. The antenna comes with 4\*Nf connectors.

**Wi Fi 6E**  
**2.4GHz + 5GHz**  
**6GHz + 7GHz**  
**14 dBi**  
**DIRECTIONAL**  
**IP 67**  
**-40° TO +80°**  
**4x4 MIMO**

OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**



MADE IN **EUROPE**



## WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.125 GHz
GAIN	12 dBi 14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/30° 90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 $\Omega$
SEPARATION BETWEEN CONNECTORS	>30 dB
FRONT-TO-BACK	> 20dB >25dB
MAX INPUT POWER	50W
DC GROUND	Yes

## MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

DIMENSIONS	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
REGULATION RANGE	+/- 30°
MAST DIAMETER RANGE	25 - 60mm 0.98-2.36 inch
MATERIAL	Polyamide with fiberglass + galvanized steel U-Bolts
MOUNTING PLACE	Wall or ceiling or mast

## COMPATIBLE ROUTERS


VARIANT: S14HV.90.4NF

DIGI	TX64
ADTRAN	Bluesocket 1925, Bluesocket 6120
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
AEROHIVE NETWORKS	AP1130
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARISTA	O-105E
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-584, AP-634, IAP-314, IAP-324, IAP-334
CAMBIUM NETWORKS	ePMP 4600
CISCO	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802P, AIR-CAP1532E, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, Catalyst 9130AXE, Catalyst 9163E, Catalyst IW9165E, IW3702-2E, IW3702-4E, IW6300, MR42E, MR46E, MR53E, MR74, MR76, MR84, MR86
COMSET	CM770W-6
CRADLEPOINT	E3000
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP, DWL-8710AP
DIGI	TX64
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENH1350EXT, ENS620EXT, ESW850, EWS850-FIT


<b>EXTREME NETWORKS</b>	AP 305Cx, AP 360E, AP 3965E, AP 8533, AP3000X, AP310e
<b>FORTINET</b>	AP1020E, AP822E, FAP-222C, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
<b>FOUR-FAITH</b>	5G Industrial CPE F-NR200
<b>HUAWEI</b>	AirEngine 9700D-S, AP6150DN, AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
<b>JUNIPER NETWORKS</b>	AP41E
<b>MIKROTIK</b>	L23UGSR-5HaxD2HaxD, RB912
<b>MILESIGHT</b>	UR75
<b>MIST</b>	AP32E, AP41E, AP43E, AP61E
<b>PEPLINK</b>	AP Pro AX, Balance 310 fiber 5G, MAX HD2, MAX HD4
<b>RAJANT</b>	AG1
<b>RUCKUS</b>	T750SE
<b>SIEMENS</b>	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0, SCALANCE W1788
<b>WAVETEL</b>	W3604 Multi-WAN, W3608 Multi-WAN
<b>WLINK</b>	G930
<b>XIRRUS</b>	XH2-120
<b>OTHER</b>	4 * N-male, 4 * RPSMA, 4 * RPTNC

## PLOTS



Gain

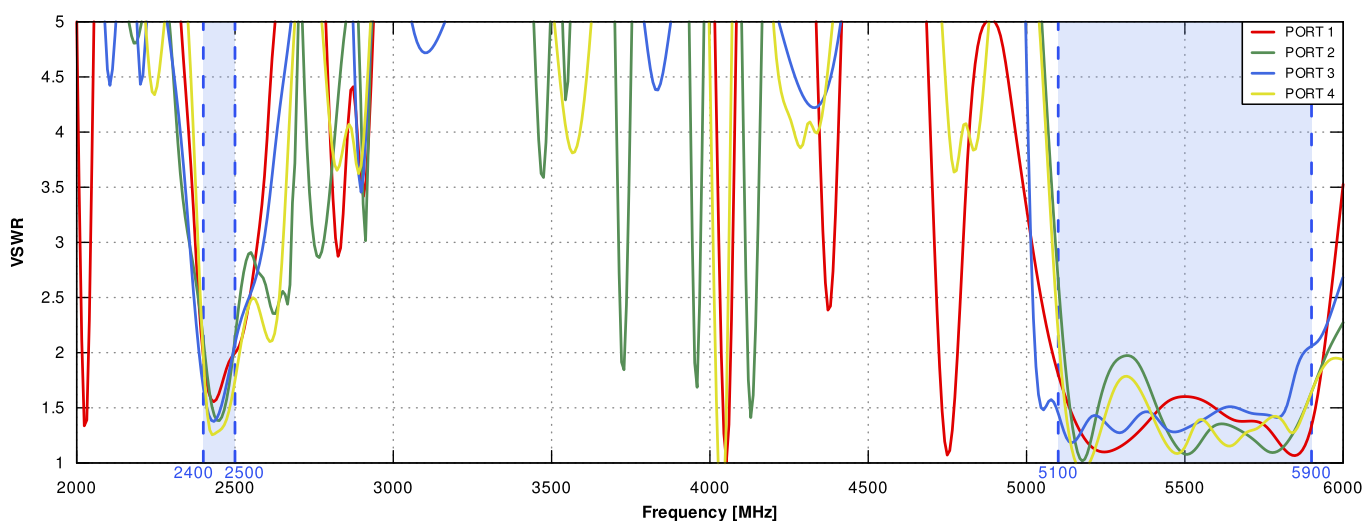



VSWR

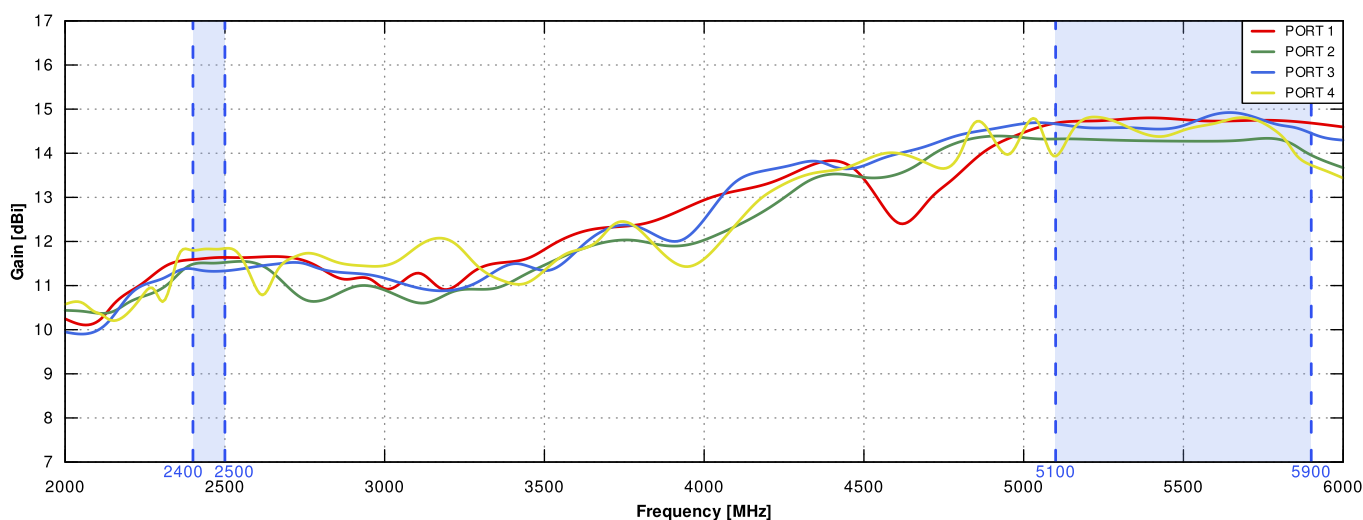


## PORT 1&3 From 2.4GHz to 2.5GHz

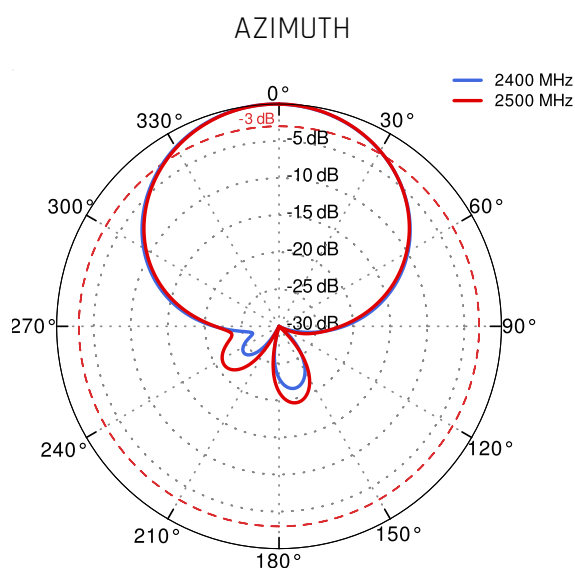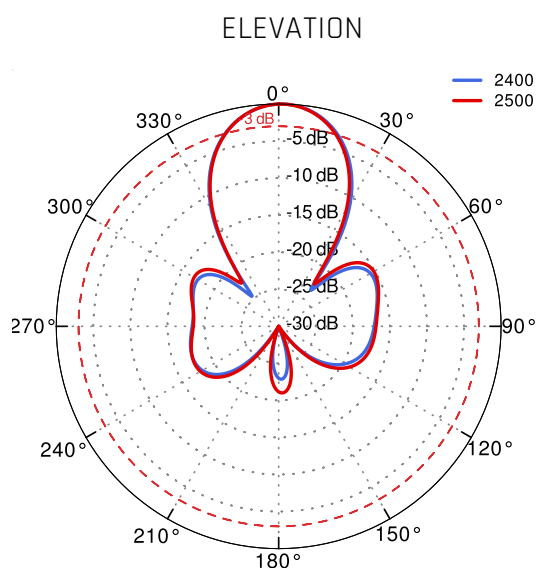


## PORT 2&4 From 2.4GHz to 2.5GHz

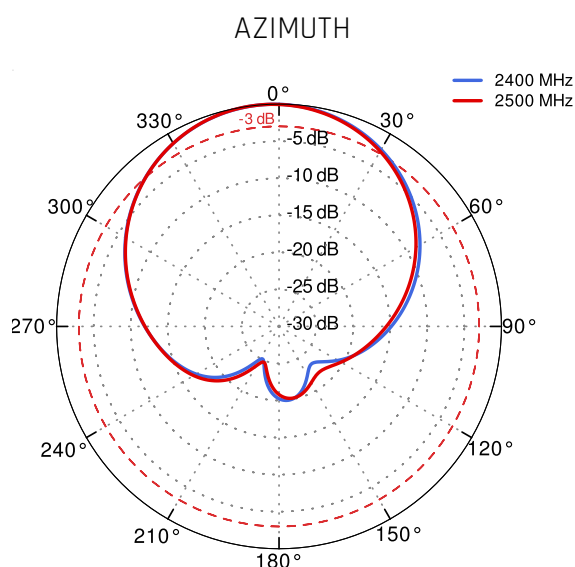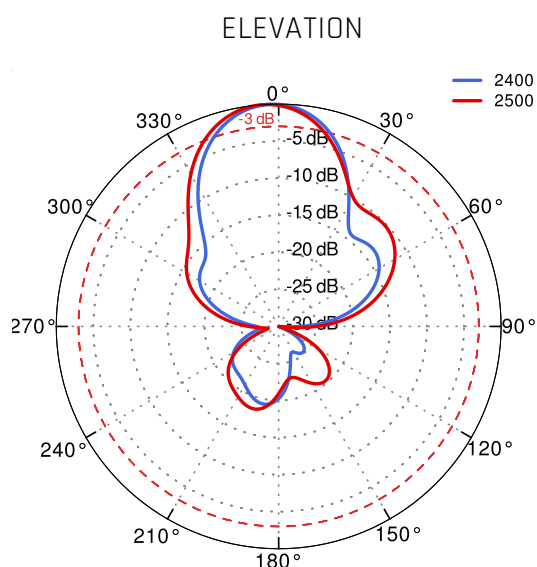

## PORT 1&3 From 5.1GHz to 5.9GHz

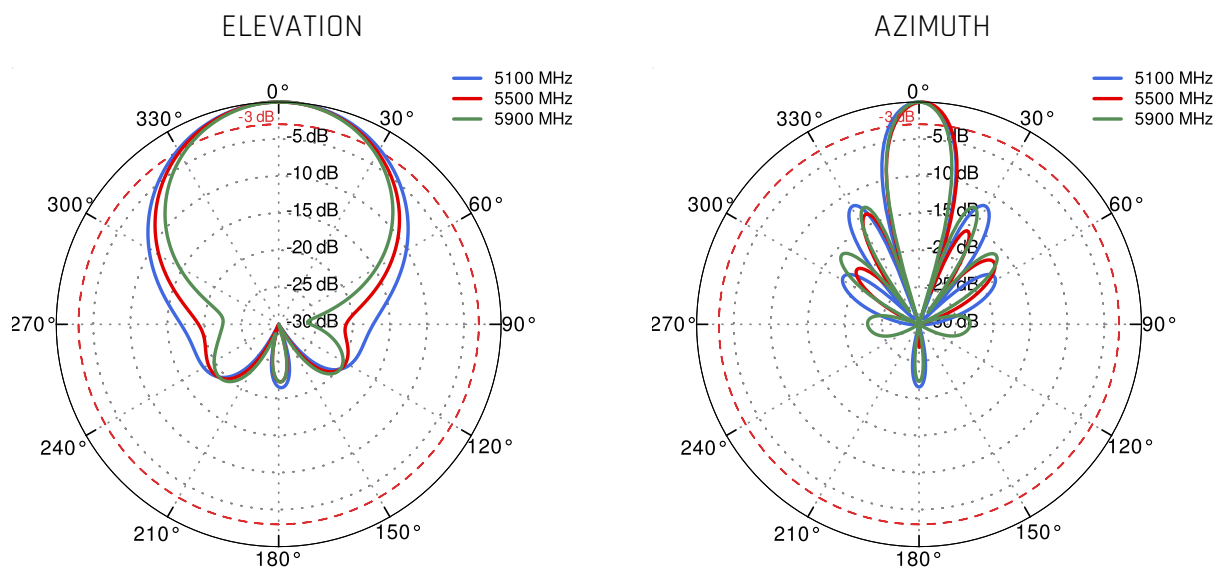

## PORT 2&4 From 5.1GHz to 5.9GHz

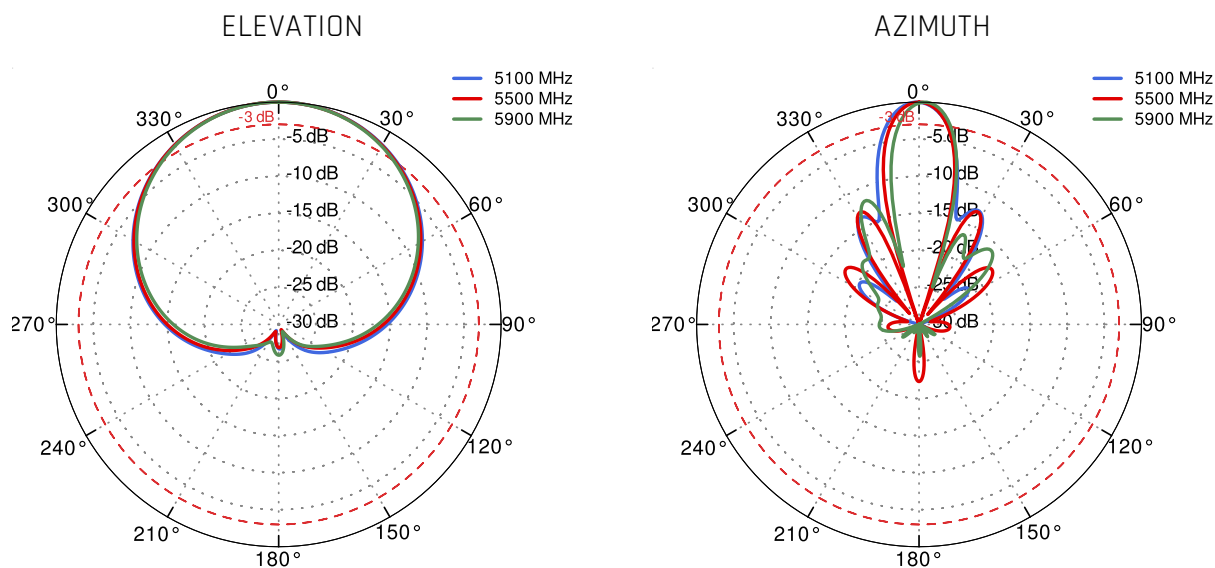



## DIMENSIONS

