

QuSector 17HV-90-2 Nf

QuSector 17HV-90-2 offers a 90 degrees, 17dBi gain signal with four Nf connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector 17HV-90-2 is a concurrent, dual-band, H&V polarity, MIMO 2x2 panel antenna. It simultaneously operates at 2.4GHz with 14dBi gain and 5GHz with 17dBi gain. Due to its high gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions.

The antenna comes with integrated Nf connectors.

QuSector 17HV-90-2 was designed to be a perfect match for your access point.



OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**



MADE IN **EUROPE**



WI-FI SPECIFICATION

| | |
|-------------------------------|------------------------------|
| FREQUENCY | 2.4 - 2.5GHz 5.1 - 5.9GHz |
| GAIN | 14 dBi 17 dBi |
| VSWR | < 1.80 |
| BEAMWIDTH | 90°/16° 90°/8° |
| POLARIZATION | Horizontal Vertical |
| IMPEDANCE | 50 Ω |
| SEPARATION BETWEEN CONNECTORS | >30 dB |
| FRONT-TO-BACK | > 23dB >20dB |
| MAX INPUT POWER | 50W |
| DC GROUND | Yes |

MECHANICAL SPECIFICATION

| | |
|-----------------------|--|
| MATERIAL | ABS |
| CONNECTOR | 2xNf |
| OUTER DIMENSIONS | 272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch |
| WEIGHT | 1.8 kg |
| OPERATING TEMPERATURE | -40°C to +80°C -40°F to 176°F |

MOUNTING KIT

| | |
|---------------------|--|
| DIMENSIONS | 9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch |
| REGULATION RANGE | +/- 30° |
| MAST DIAMETER RANGE | 25 - 60mm 0.98-2.36 inch |
| MATERIAL | Polyamide with fiberglass + galvanized steel U-Bolts |
| MOUNTING PLACE | Wall or ceiling or mast |

COMPATIBLE ROUTERS

VARIANT: S17HV.90.2NF


| | |
|-------------|---|
| TELTONIKA | RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTM10, RUTM11, RUTM51, RUTM54, RUTX10, RUTX11, RUTX12, RUTX50 |
| ROBUSTEL | EG5100, EG5120, EG5200, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite |
| RAJANT | BreadCrumb ES1-2450IS, BreadCrumb ES1-2450CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2255C, BreadCrumb LX5-2295C, BreadCrumb LX5-2455D, BreadCrumb LX5-2955C, Hawk BreadCrumb FE1-2450 / FE1-2450A, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-2450CS |
| ACKSYS | AirBox LTE, AirBox/10, AirLink, AirWan, AirXroad, AirXroad/4P, RuggedAir100 |
| ADVANTECH | EKI-1361(-MB) EKI-1362, EKI-6233BN, EKI-6333AC-2GD |
| ANYBUS | Wireless Router WLAN, WLAN Access Point IP30, WLAN Access Point IP67 |
| ARUBA | AP-204, AP-504, IAP-204, RAP-108 |
| COMSET | CM210A-W, CM210Q-W, CM510Q-W, CM550W, CM580W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G, CM685VX, CM820Q-4, CM820Q-6, CM950W |
| CRADLEPOINT | E300, IBR600C, IBR900, R1900, R500, R920, S700, W4005 |
| D-LINK | DAP-1665, DAP-2020, DAP-2310, DAP-2360, DBA-3621P, DIS-2650AP, DWL-8720AP, N300 4G |
| DIGI | TX54 LTE-Advanced, TX64, WR44 RR |
| ENGENIUS | ENS500EXT |

| | |
|-------------------------|---|
| EXTREME NETWORKS | AP 3917, AP 7522, AP 7522E, AP122X, AP305CX |
| FORTINET | FAP-233G, FAP-U432F |
| FOUR-FAITH | 5G Industrial Router F-NR100, 5G SIM WiFi Router F-NR120, 5G Smart Light Pole Gateway F-G300, Edge Computing Gateway F-G100 |
| HUAWEI | AP4051DN, AP4130DN, AP4151DN |
| MERU | AP1010E |
| MIKROTIK | L009UiGS-2HaxD-IN, L11UG-5HaxD, RB922 |
| MOXA | AWK-1131A Series, AWK-1137C Series, AWK-1151C Series, AWK-3131A Series, AWK-3252A Series, AWK-4131A Series, AWK-4252A Series, TAP-213 Series |
| PEPLINK | AP One Rugged, B One, Balance 20X, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Mini M2M, MAX BR1 MK2, MAX BR1 Pro, MAX BR1 Pro 5G, MAX Transit, MAX Transit Duo Pro, UBR Plus |
| PERLE | IOLAN SCG W Secure Console Server, IOLAN SCG WM Secure Console Server, IOLAN SDG W Serial Device Servers |
| PROROUTE | H685 LTE 4G CAT6 Router, H685 WRT M2M 5G Router, H900 5G Router |
| RAJANT | BreadCrumb ES1-2450IS, BreadCrumb ES1-2450CS, BreadCrumb LX5-2255A, BreadCrumb LX5-2255B, BreadCrumb LX5-2255C, BreadCrumb LX5-2295C, BreadCrumb LX5-2455D, BreadCrumb LX5-2955C, Hawk BreadCrumb FE1-2450 / FE1-2450A, Peregrine LTE BreadCrumb FE1-2455LS, Peregrine LTE BreadCrumb FE1-2455LW, Sparrow BreadCrumb ME5-2450CS |
| ROBUSTEL | EG5100, EG5120, EG5200, R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011, R201x, R5020, R5020 Lite |
| RUCKUS | T350SE |


| | |
|----------------------------------|---|
| SEMTECH (SIERRA WIRELESS) | AirLink RV55, AirLink RX55, RV55, XR60 |
| SIEMENS | 6GK5763-1AL00-7DA0, 6GK5766-1GE00-7DB0, 6GK5763-1AL00-3AA0, 6GK5763-1AL00-3DA0, 6GK5763-1AL00-7DB0, 6GK5766-1GE00-3DA0, 6GK5766-1GE00-3DB0, 6GK5766-1GE00-7DA0, 6GK5766-1GE00-7TA0, 6GK5766-1GE00-7TB0, Scalance W734 RJ45, Scalance W738 M12, Scalance W774 M12 EEC, Scalance W774 RJ45, Scalance W778-1 M12, Scalance W778-1 M12 EEC, SCALANCE W786 |
| TELTONIKA | RUT900, RUT901, RUT950, RUT951, RUT955, RUT956, RUTM10, RUTM11, RUTM51, RUTM54, RUTX10, RUTX11, RUTX12, RUTX50 |
| WAVETEL | W240 4G/LTE, W2400 LTE , W3600 4G/LTE Dual WAN, W4600, W4600-NR 5G, W4600-S2, WNR320 5G, WNR340 5G, WNR5601 5G |
| WLINK | ER120, G200, G230, G510, G520, G530, G530, R220, R520 |
| XIRRUS | XR-520H |
| ZYXEL | LTE3301-PLUS, NWA55AXE |
| OTHER | 2 * N-male, 2 * RPSMA, 2 * RPTNC |

PLOTS


VSWR

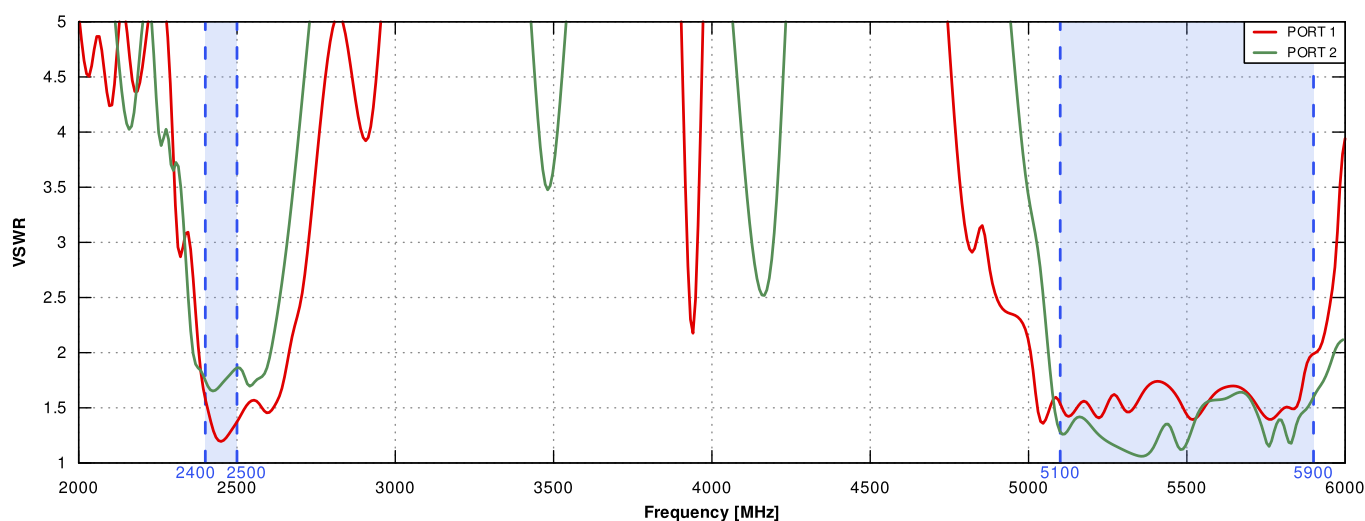


Gain

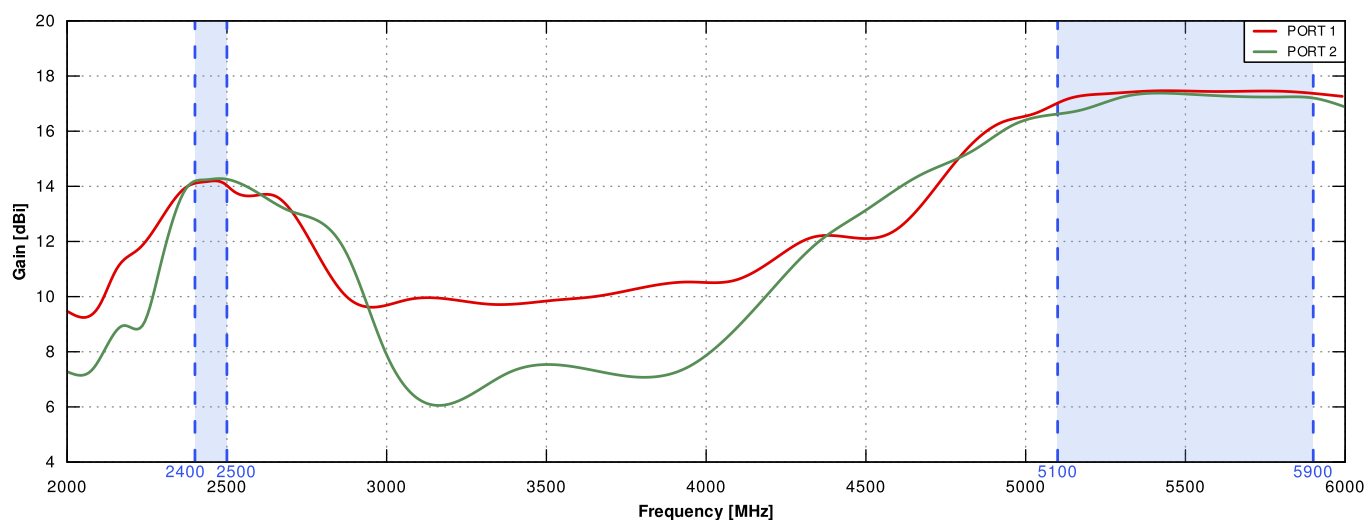


PORT 1 From 2.4GHz to 2.5GHz

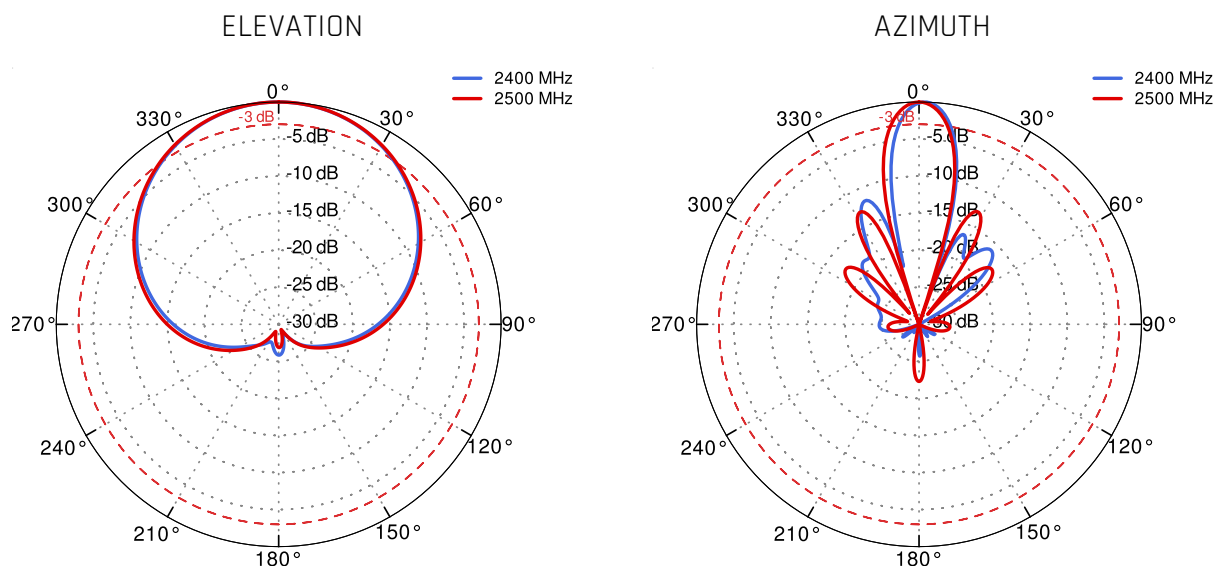


PORT 2 From 2.4GHz to 2.5GHz

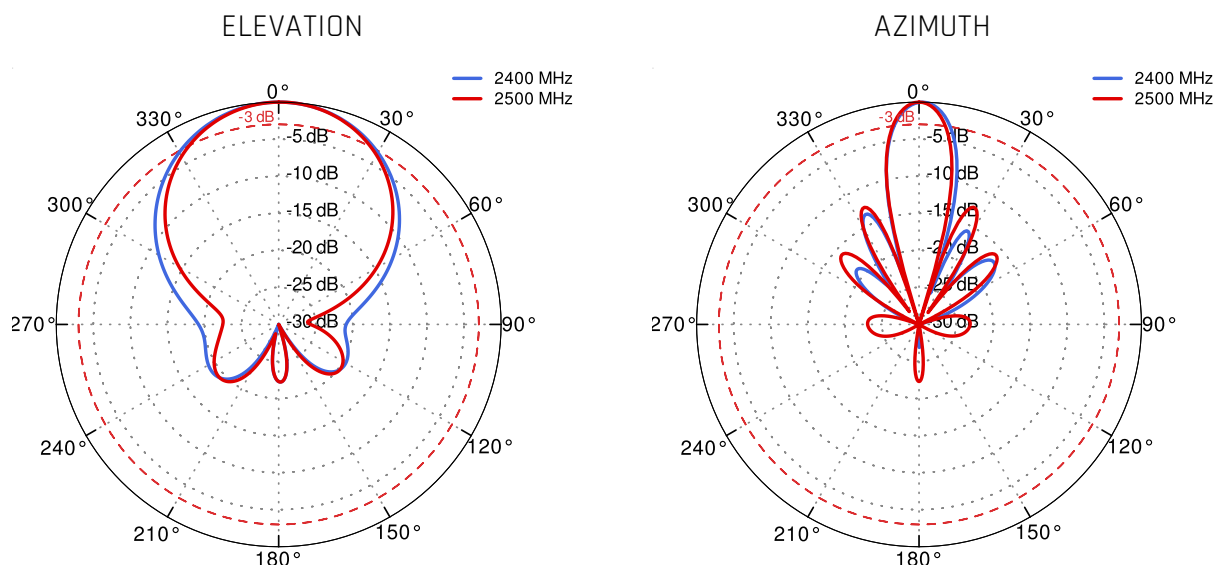

PORT 1 From 5.1GHz to 5.9GHz

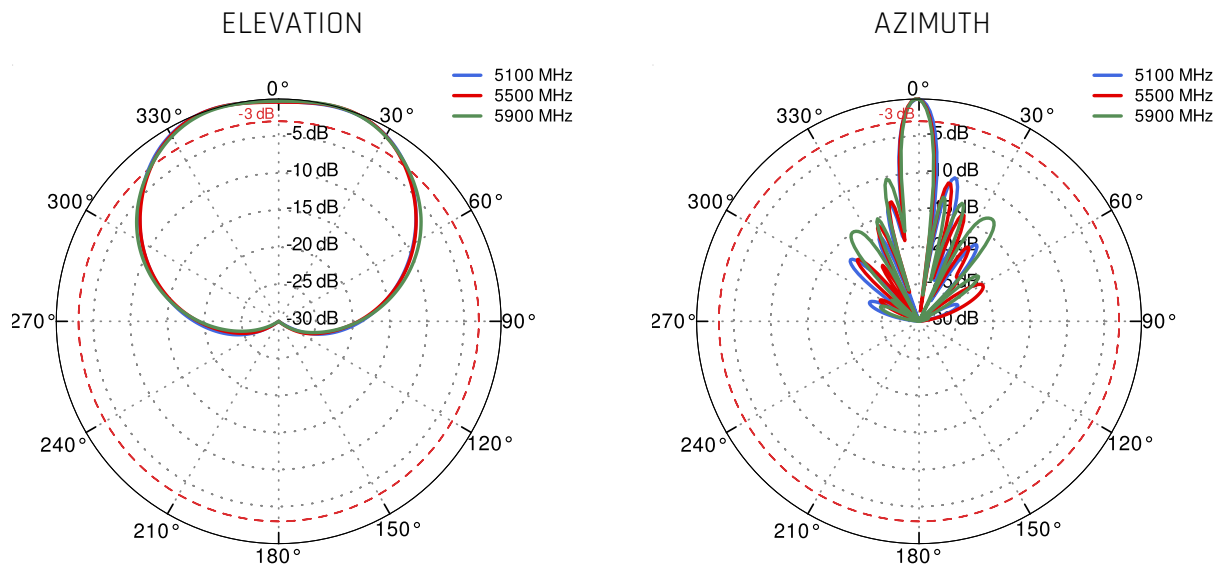

PORT 2 From 5.1GHz to 5.9GHz

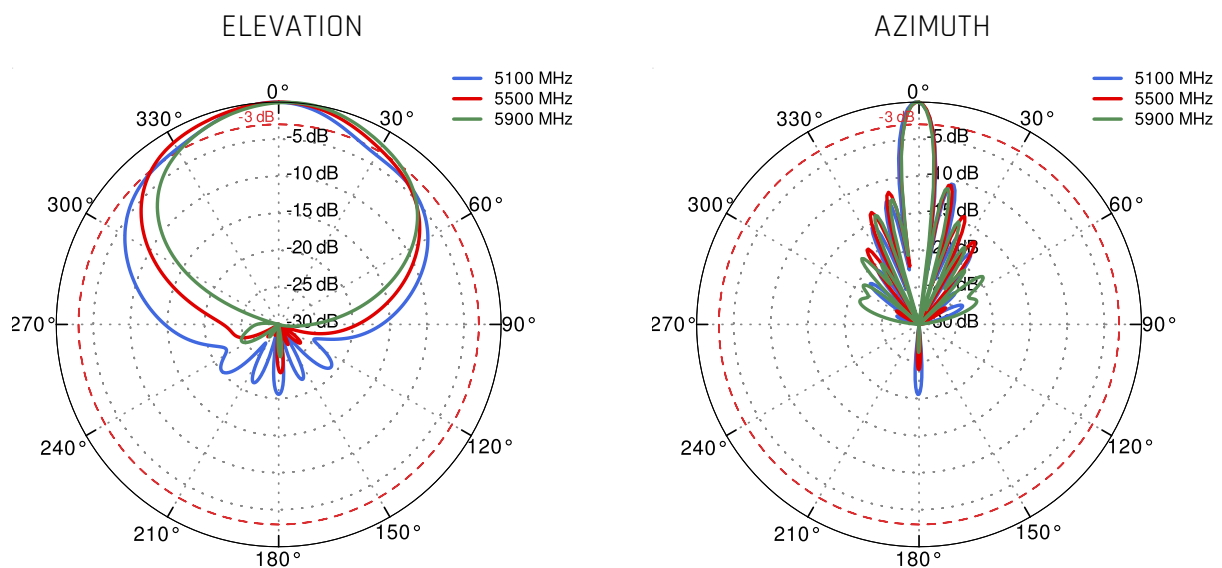

DIMENSIONS

