

QuSector S24-15HV-90-2 Nf

QuSector S24-15HV-90-2 offers a 90 degrees, 15dBi gain signal with two RP-SMA 2.4GHz connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector S24-15HV-90-2 is a single band, H&V polarity, MIMO 2x2 panel antenna. Two connectors operate at 2.4GHz with 15dBi gain. Due to its medium gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions. The antenna comes with 2*Nf connectors.

 **2.4GHz** **2x2 MIMO** **2.4GHz** **15 dBi** **DIRECTIONAL** **IP 67** **-40° TO +80°**

OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP67



ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER



WALL OR MAST MOUNTING SYSTEM WITH **TWO PLANES, 60 DEGREES REGULATION**



MADE IN **EUROPE**



WI-FI SPECIFICATION

| | |
|-------------------------------|------------------------|
| FREQUENCY | 2.3 - 2.7GHz |
| GAIN | 14 dBi |
| VSWR | < 1.80 |
| BEAMWIDTH | 30°/30° |
| POLARIZATION | Horizontal Vertical |
| IMPEDANCE | 50 Ω |
| SEPARATION BETWEEN CONNECTORS | > 32dB |
| FRONT-TO-BACK | > 30dB |
| MAX INPUT POWER | 50W |
| DC GROUND | Yes |

MECHANICAL SPECIFICATION

| | |
|-----------------------|---|
| MATERIAL | ABS |
| CONNECTOR | 2xRPSMA/2xNM/2xRPTNC |
| OUTER DIMENSIONS | 29.2 x 48.6 x 10.6 cm 11.5 x 19.13 x 4.17 inch |
| WEIGHT | 2.5 kg |
| OPERATING TEMPERATURE | -40°C to +80°C -40°F to 176°F |

MOUNTING KIT

| | |
|---------------------|--|
| DIMENSIONS | 9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch |
| REGULATION RANGE | +/- 30° |
| MAST DIAMETER RANGE | 25 - 60mm 0.98-2.36 inch |
| MATERIAL | Polyamide with fiberglass + galvanized steel U-Bolts |
| MOUNTING PLACE | Wall or ceiling or mast |

COMPATIBLE ROUTERS

VARIANT: SS24.15HV.90.2NF



| | |
|-------------|---|
| TELTONIKA | RUT900, RUT901, RUT950, RUT951, RUT955, RUT956 |
| ROBUSTEL | R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011 |
| COMSET | CM210A-W, CM210Q-W, CM685V-1, CM685V-4, CM685V-6, CM685V-6-G |
| CRADLEPOINT | IBR600C, W4005 |
| D-LINK | DAP-2310, DAP-2360 |
| PROROUTE | H685 LTE 4G CAT6 Router, H685 WRT M2M 5G Router, H900 5G Router |
| ROBUSTEL | R1520 Global, R1520-4L (S), R1520-4L (V), R2010, R2011 |
| TELTONIKA | RUT900, RUT901, RUT950, RUT951, RUT955, RUT956 |
| WAVETEL | W240 4G/LTE, W4600, W4600-S2 |

WLINK



R220, R520

PLOTS

From 2.4GHz to 2.5GHz

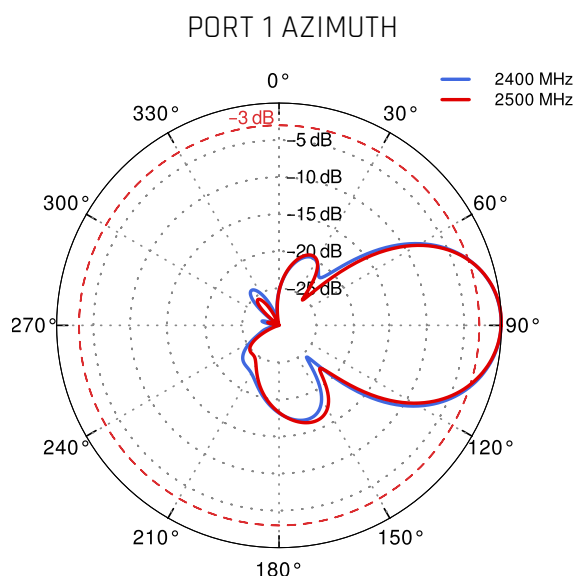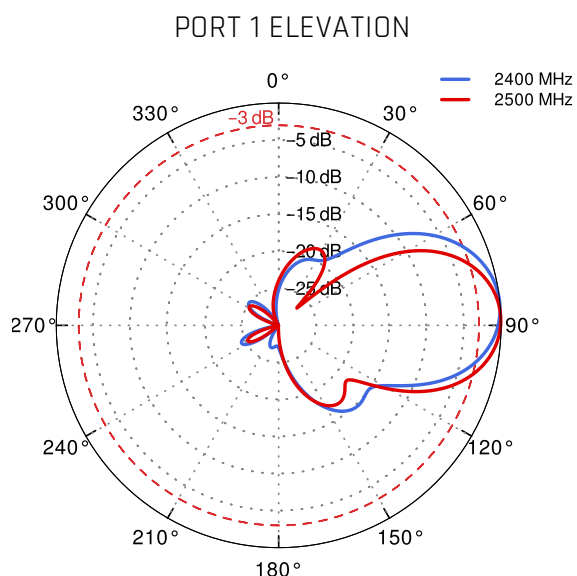

From 2.4GHz to 2.5GHz

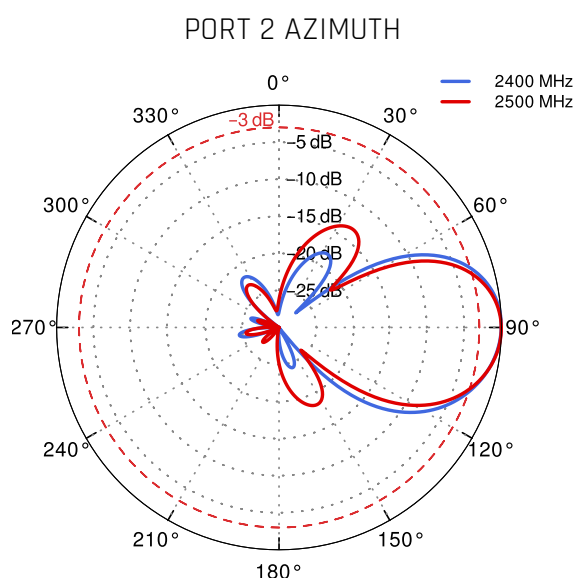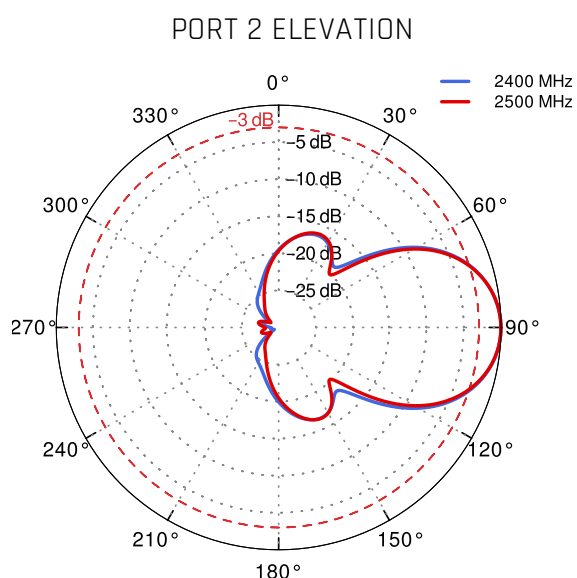

DIMENSIONS

