

# QuSector S57-14HV-90-4 Nf

QuSector S57-14HV-90-4 offers a 90 degrees, 14dBi gain signal with four Nf connectors. It is a perfect indoor and outdoor device for industrial installations.

QuSector S57-14HV-90-4 Nf is a concurrent, Wi-Fi 6e / 7, H&V polarity, MIMO 4x4 panel antenna. It simultaneously operates at **5.1GHz** and **7.125GHz** with **14dBi gain**. Due to its high gain, it can be used on short or medium distances, for example for hotspots in schools, stadiums, offices or public places. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. High quality injection moulded enclosure allows to implement it alongside with indoor and IP67 outdoor solutions.

The antenna comes with integrated Nf connectors.

QuSector S57-14HV-90-4 was designed to be a perfect match for **Cambium ePMP 4600 (MIMO 4x4)**.

**Wi-Fi 6E**  
5GHz  
14 dBi  
DIRECTIONAL  
IP 67  
-40° TO +80°  
4x4 MIMO

OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67



ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



WALL OR MAST MOUNTING SYSTEM  
WITH **TWO PLANES, 60 DEGREES**  
REGULATION



MADE IN **EUROPE**



## WI-FI SPECIFICATION

FREQUENCY	5.1 - 7.125GHz
GAIN	14 dBi
VSWR	< 2.00
BEAMWIDTH	90°/16°
POLARIZATION	Horizontal Vertical
IMPEDANCE	50 $\Omega$
FRONT-TO-BACK	> 25dB
MAX INPUT POWER	50W
DC GROUND	Yes

## MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	272 x 276 x 96 mm 10.71 x 10.87 x 3.78 inch
WEIGHT	1.8 kg
OPERATING TEMPERATURE	-40°C to +80°C -40°F to 176°F

## MOUNTING KIT

### DIMENSIONS

9.9 x 10.5 x 14.8 cm  
3.9 x 4.13 x 5.83 inch

### REGULATION RANGE

+/- 30°

### MAST DIAMETER RANGE

25 - 60mm  
0.98-2.36 inch

### MATERIAL


Polyamide with fiberglass + galvanized steel U-Bolts

### MOUNTING PLACE


Wall or ceiling or mast

## PLOTS



VSWR

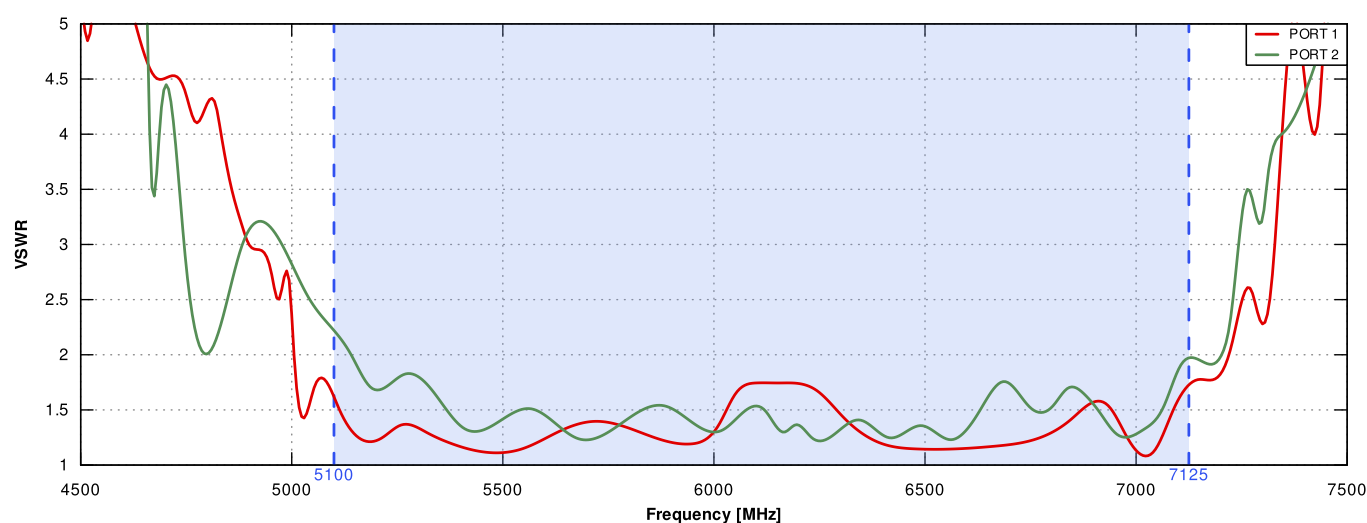



## Gain

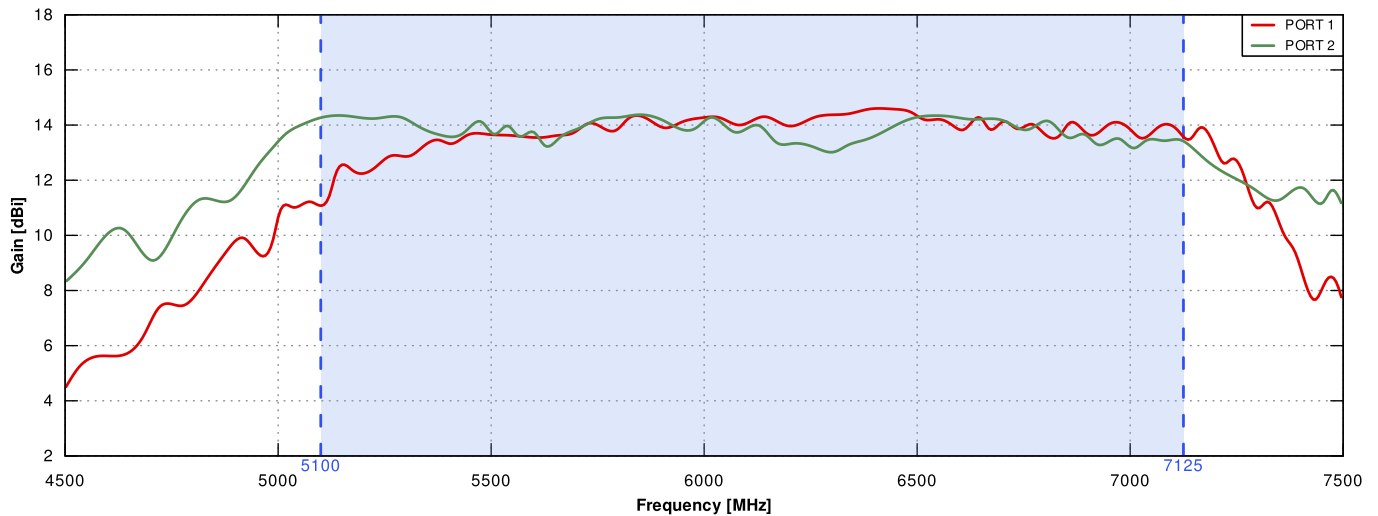

## PORT 1&3 From 5.1GHz to 6.9GHz

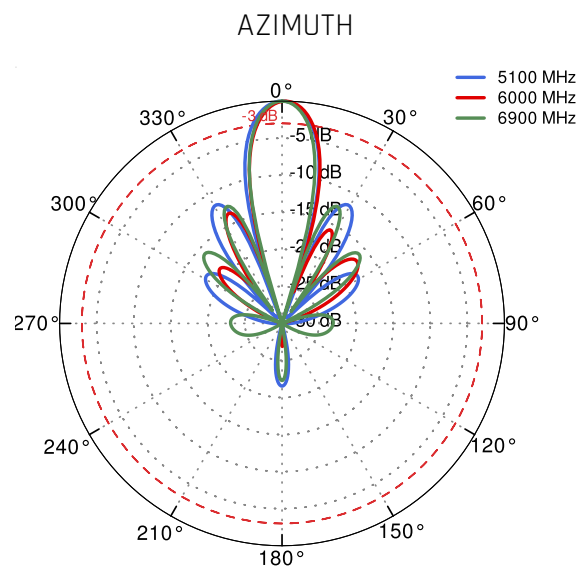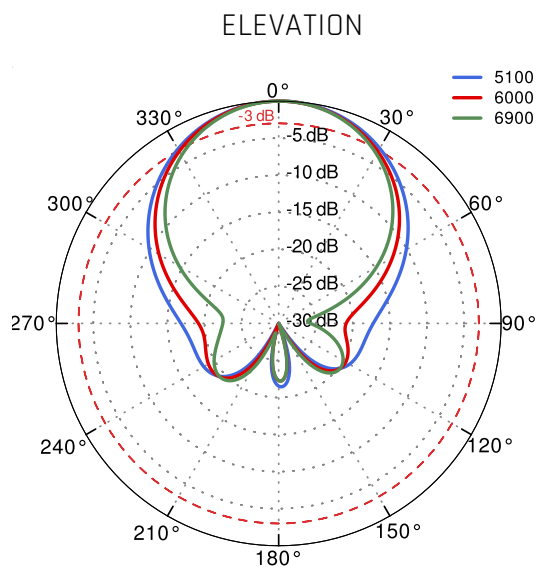

## PORT 2&4 From 5.1GHz to 6.9GHz

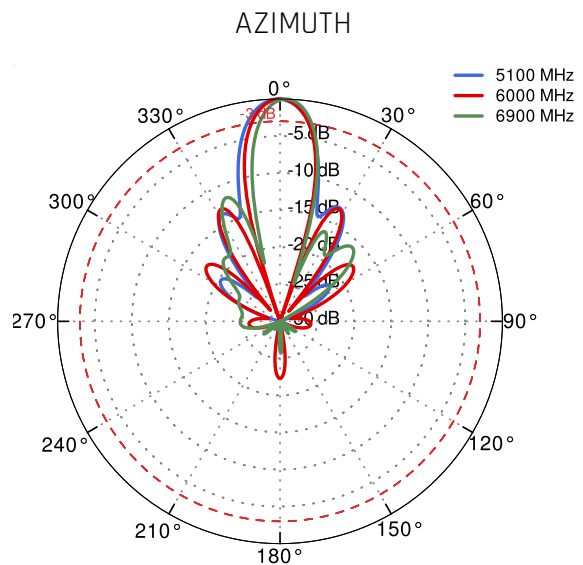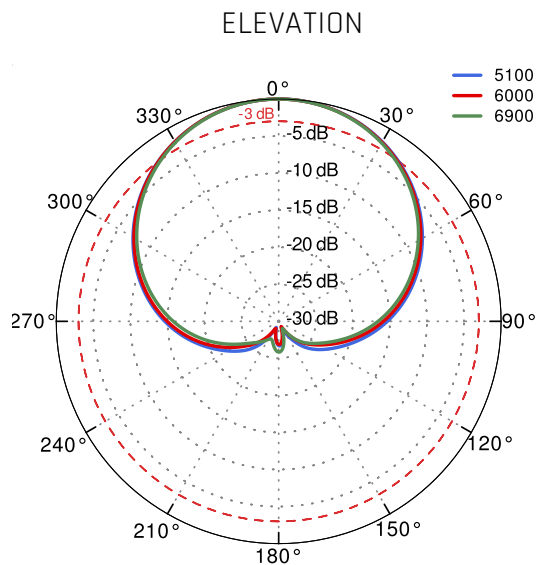

## DIMENSIONS

