

# QuSpot for Teltonika RUTX11

**Integrated multi-band LTE omni antenna + WiFi omni antenna + GPS antenna + Bluetooth antenna + place to install Teltonika RUTX11 (All-in-one)**

QuSpot omni LTE antenna for Teltonika **RUTX11** router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. It also has embedded Wi-Fi dualband 2.4 & 5 GHz omni antenna, GPS antenna and Bluetooth antenna. If you use **RUTX11** with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

This product is also compatible with **RUTM11**. If used with RUTM11, the Bluetooth antenna is unused.

**4G**  
LTE**Wi Fi**  
DUALBAND  
2.4GHz  
5GHz  
BLUETOOTH  
GPS  
694-2700MHz  
7 dBi  
OMNI  
DIRECTIONAL  
IP 67  
-40° TO +80°

OUTDOOR ANTENNA WORKS IN **ANY**  
WEATHER CONDITIONS, IP67




ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



PASSIVE **POE SUPPORT**



MADE IN **EUROPE**

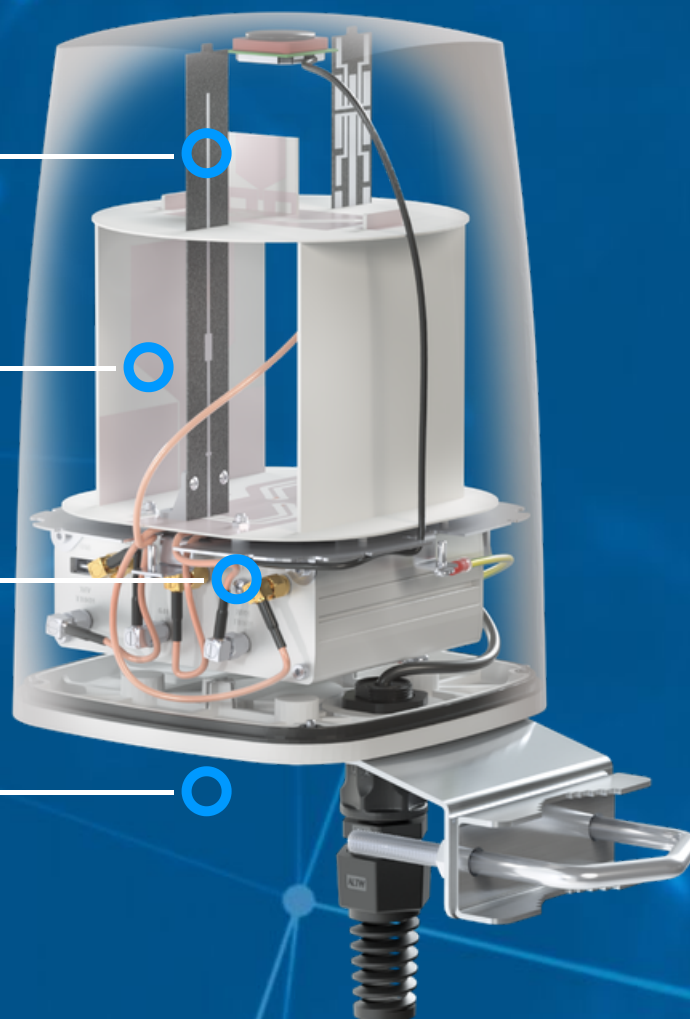

## LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6 GHz : 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 Ω

## BLUETOOTH ANTENNA SPECIFICATION

FREQUENCY	2.20 - 2.70 GHz
GAIN	2 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	40-60 mm 1.57-2.36 inch

## FREQUENCY BANDS

### 5G / LTE GSM

694 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	85	n81	n82	n83	
	n89							

### 5G / LTE UMTS

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	59	
	62	n80	n84	n86	n95			

### 5G / LTE WCS DARS


2300 MHz	30	40					2400 MHz
-------------	----	----	--	--	--	--	-------------

### 5G / LTE


2400 MHz	7	38	41	53	69	n90	2700 MHz
-------------	---	----	----	----	----	-----	-------------

## **PLOTS**

VSWR for Wi-Fi antenna

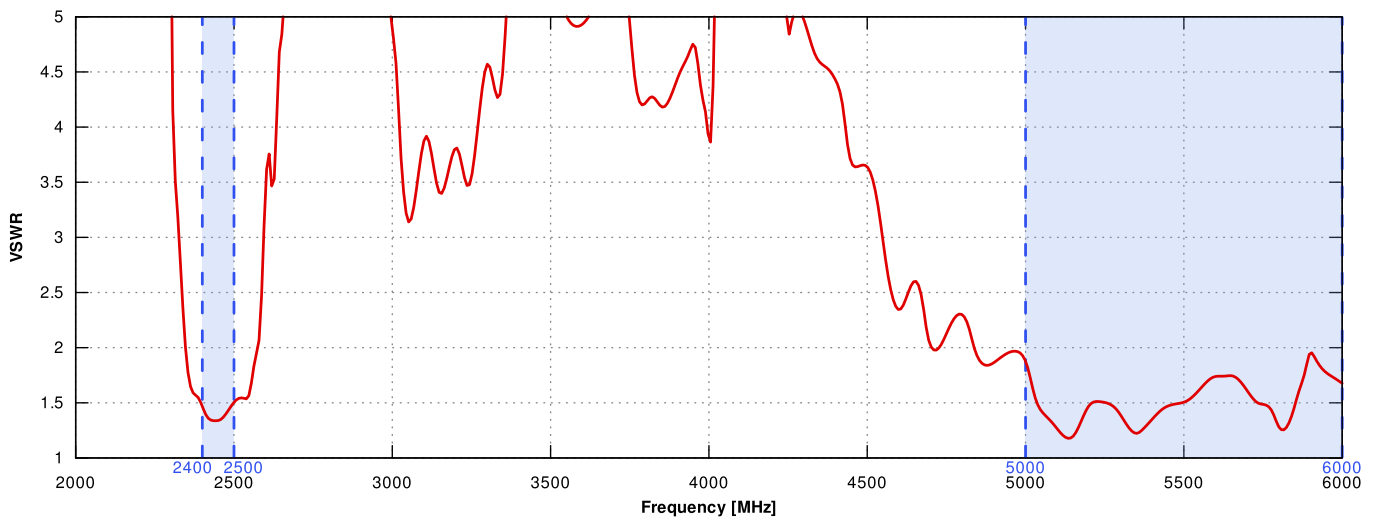


VSWR for LTE antenna

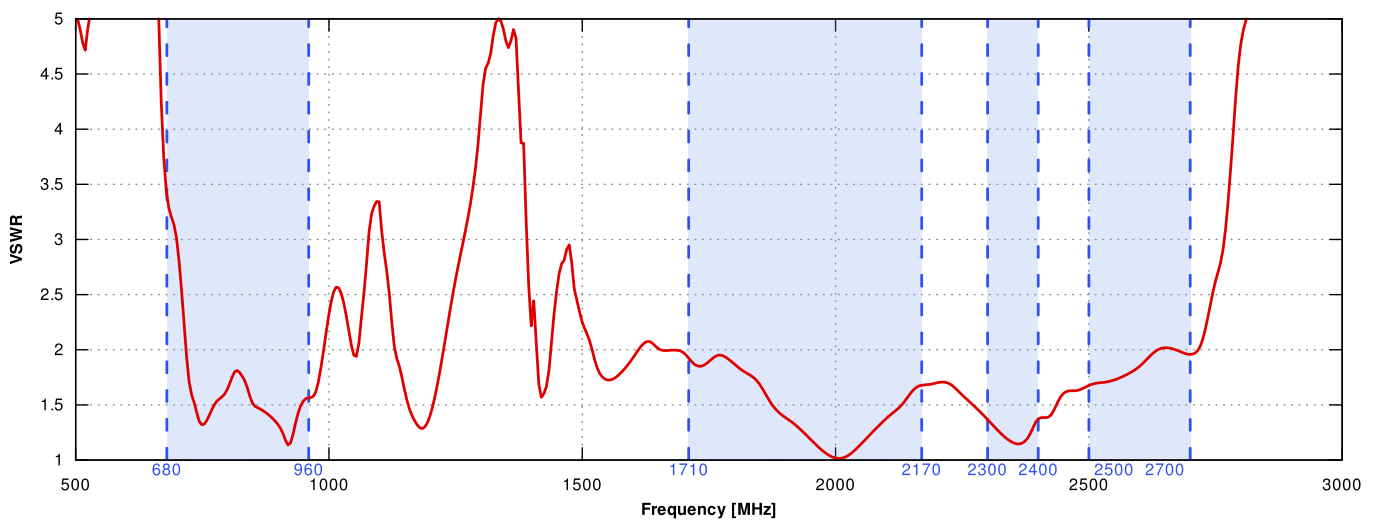



## Gain for Wi-Fi antenna





## Gain for LTE antenna

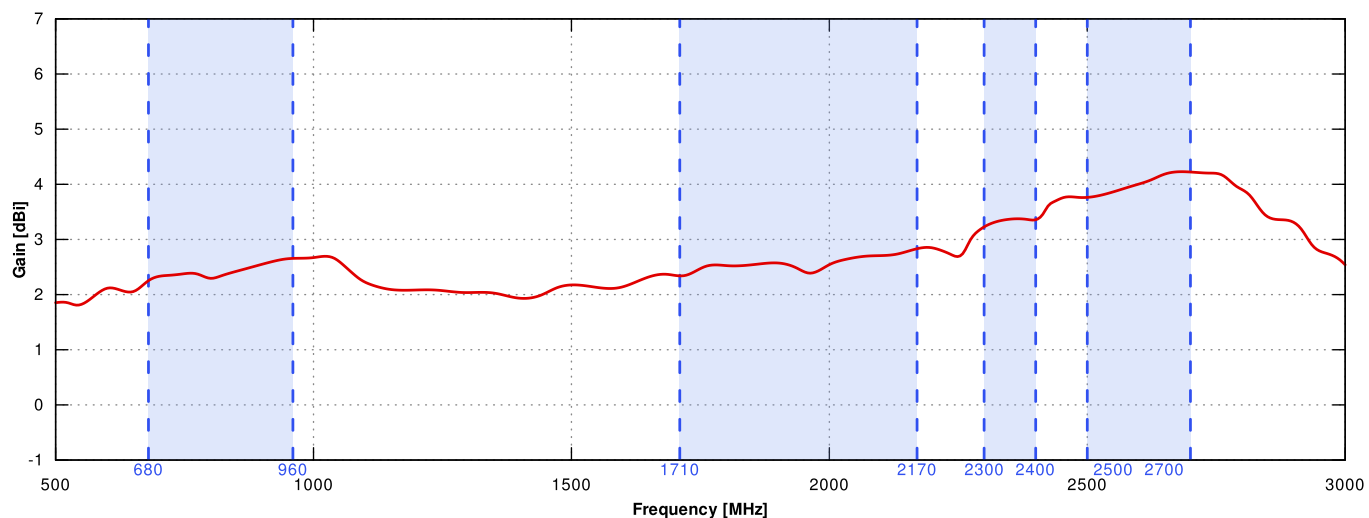



## LTE from 700MHz to 900MHz

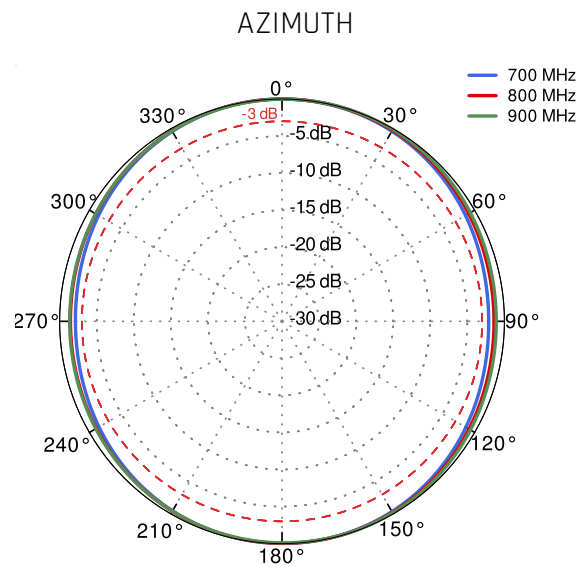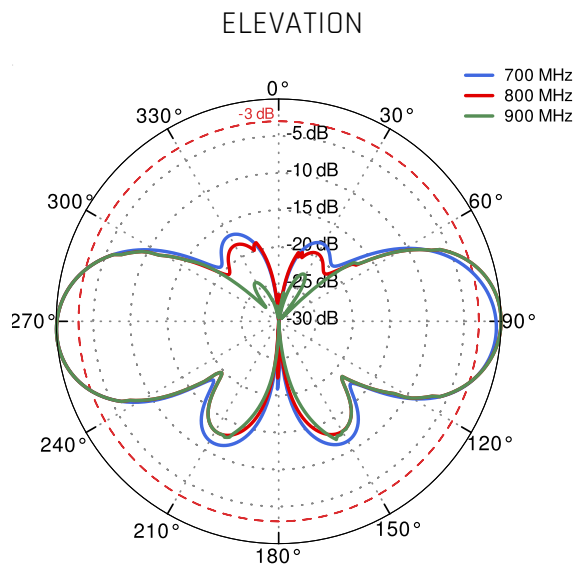



## LTE from 1.71GHz to 2.17GHz

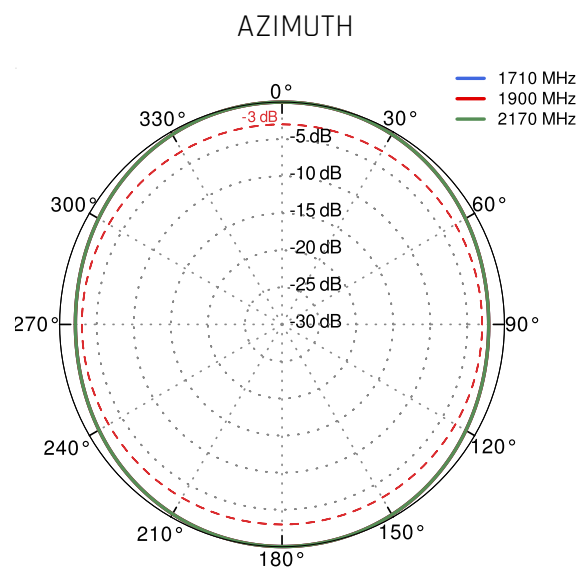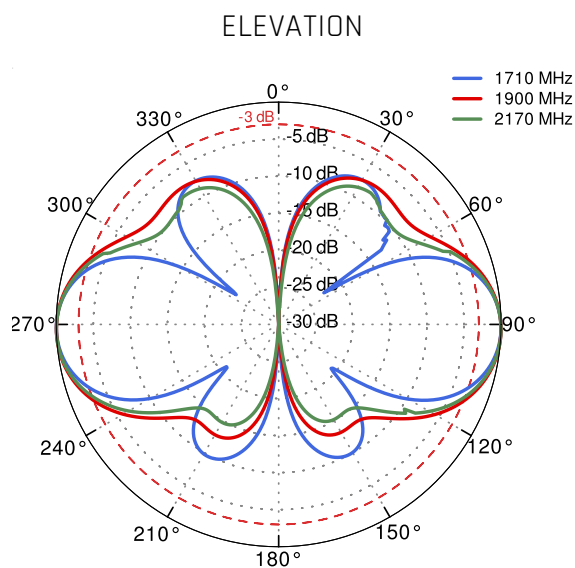

## LTE from 2.3GHz to 2.7GHz

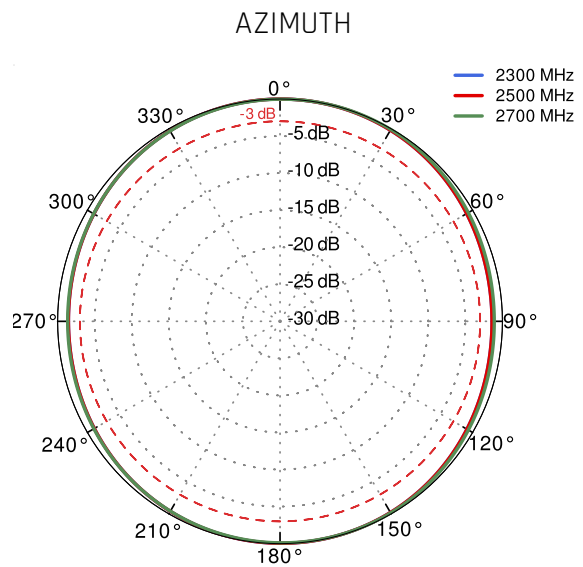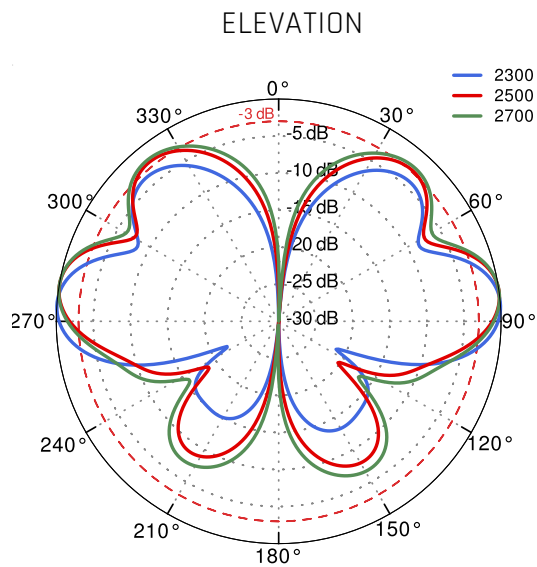

## Wi-Fi 2.4GHz and 5GHz

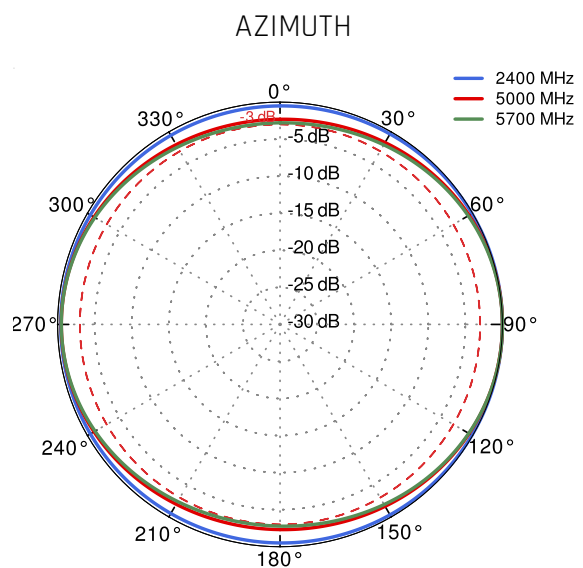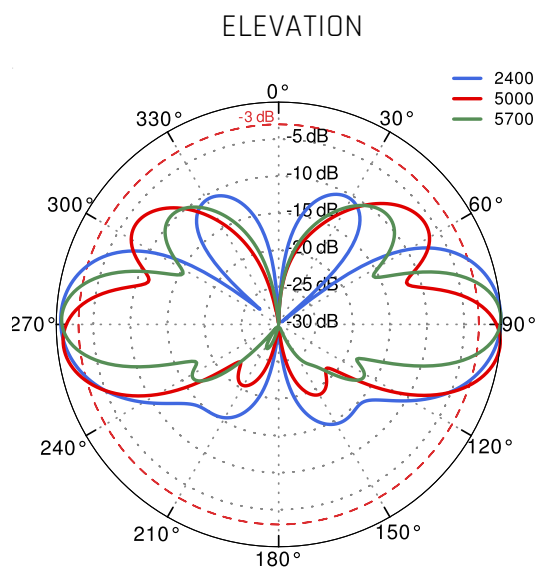



## DIMENSIONS

