


# QuSpot for Semtech / Sierra Wireless RV55

**Integrated multi-band LTE omni antenna + WiFi omni antenna + GPS antenna + place to install Semtech / Sierra Wireless RV55 (All-in-one)**

QuSpot omni LTE antenna for Semtech / Sierra Wireless **RV55** router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. It also has embedded Wi-Fi dualband 2.4 & 5 GHz omni antenna, GPS antenna and Bluetooth antenna. If you use **RV55** with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure. The set contains a [Passive PoE splitter](#), allowing you to split data and power from a single Ethernet cable and maintain gigabit transfer speeds while protecting the LAN port from damage caused by overvoltage, short circuit or improper connection. **NOTE:** should only be used with a 24V (or lower voltage) Passive PoE power supply it is not compatible with an 802.3af/at power source!

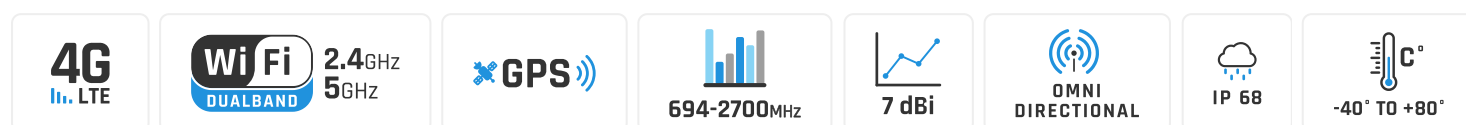


 OUTDOOR ANTENNA WORKS IN **ANY WEATHER CONDITIONS**, IP68

 ANTENNA **PERFECTLY MATCHED** WITH THE ROUTER

 WALL OR MAST MOUNTING SYSTEM

 MADE IN **EUROPE**

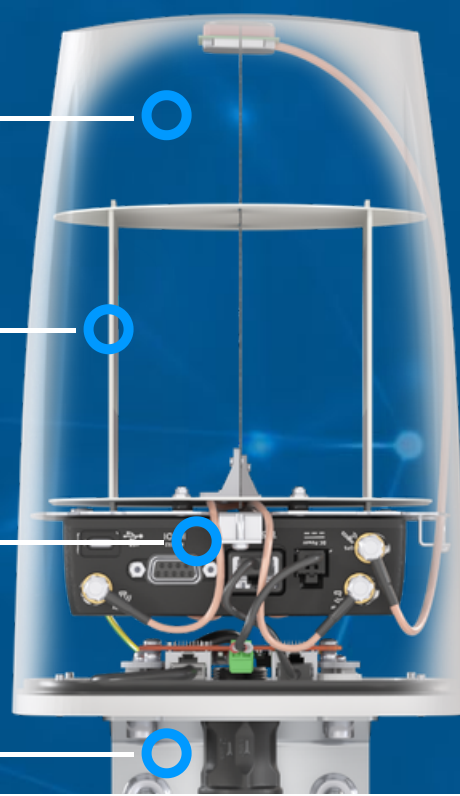

## LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.2 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 23, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 44, 53, 59, 62, 65, 66, 67, 68, 69, 85, n80, n81, n82, n83, n84, n86, n89, n90, n95
VSWR	<1.60, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 4.7 - 6 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 4.7 - 6 GHz : 7 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## POE SPECIFICATION

POE TYPE	Passive PoE up to 24V, not compatible with an 802.3af/at power source!
POE IN MODE	Mode type: B
IEEE STANDARD	IEEE 802.3ab 1000Base-T Gigabit Ethernet

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
ENCLOSURE RECOMMENDED TIGHTENING TORQUE	0,5 - 0,7 Nm
MAST DIAMETER	40-66 mm 1.57-2.60 inch

## FREQUENCY BANDS

**5G / LTE GSM**

694 MHz	5	6	8	12	13	14	17	960 MHz
	18	19	20	26	27	28	29	
	44	67	68	85	n81	n82	n83	
	n89							

**5G / LTE UMTS**

1710 MHz	1	2	3	4	9	10	25	2170 MHz
	33	34	35	36	37	39	59	
	62	n80	n84	n86	n95			

**5G / LTE WCS DARS**


2300 MHz	30	40					2400 MHz
-------------	----	----	--	--	--	--	-------------

**5G / LTE**


2400 MHz	7	38	41	53	69	n90	2700 MHz
-------------	---	----	----	----	----	-----	-------------

## PLOTS


VSWR for Wi-Fi antenna

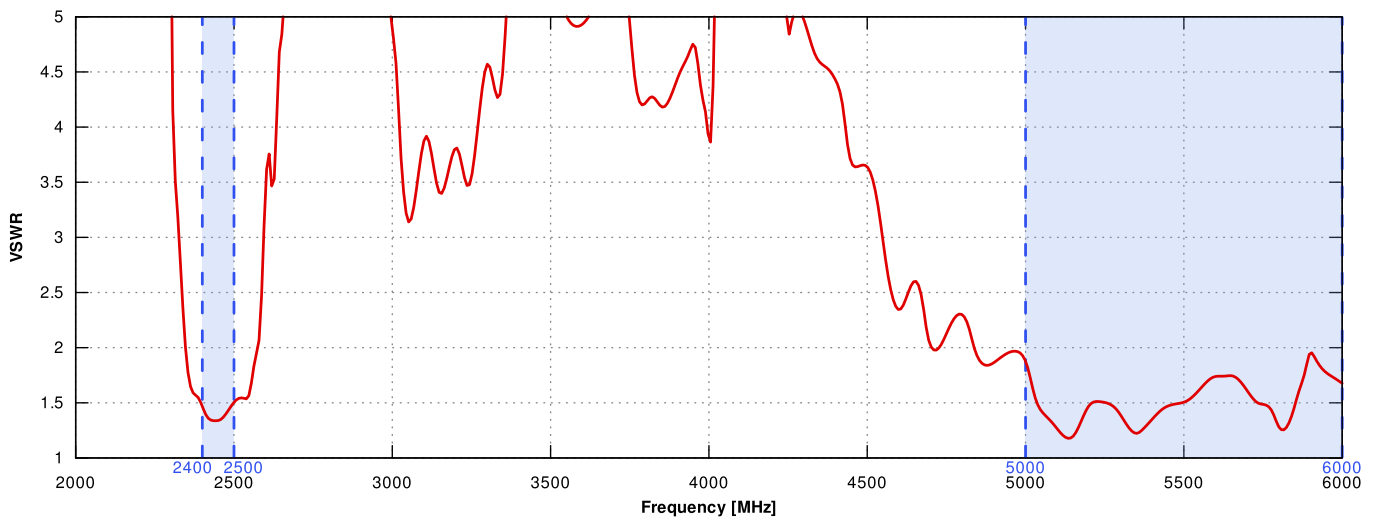


VSWR for LTE antenna

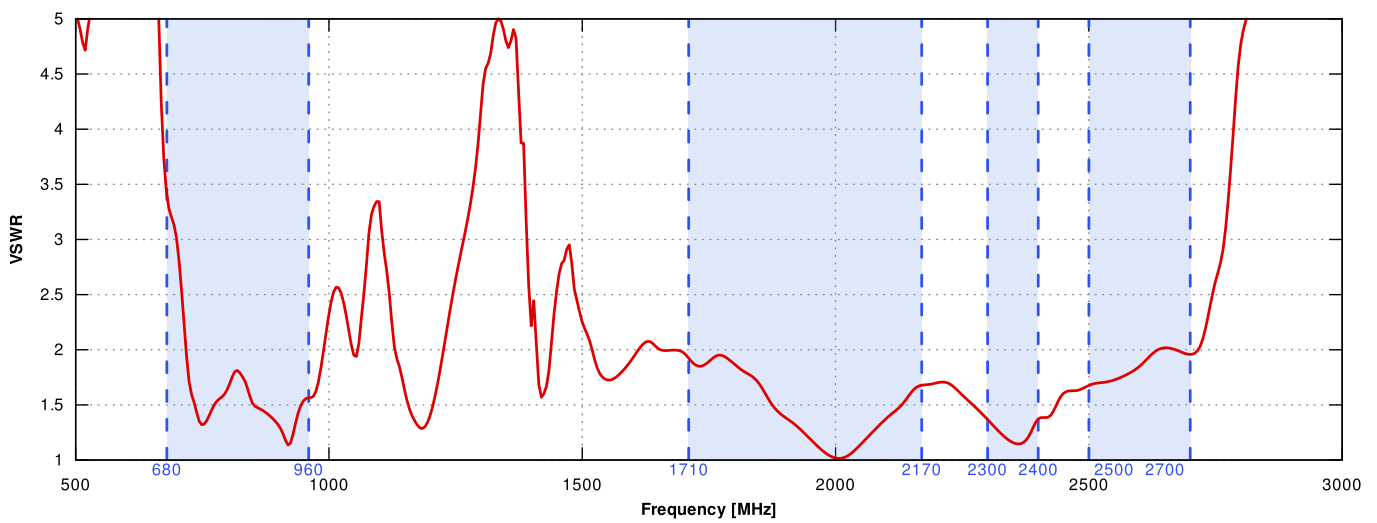



## Gain for Wi-Fi antenna

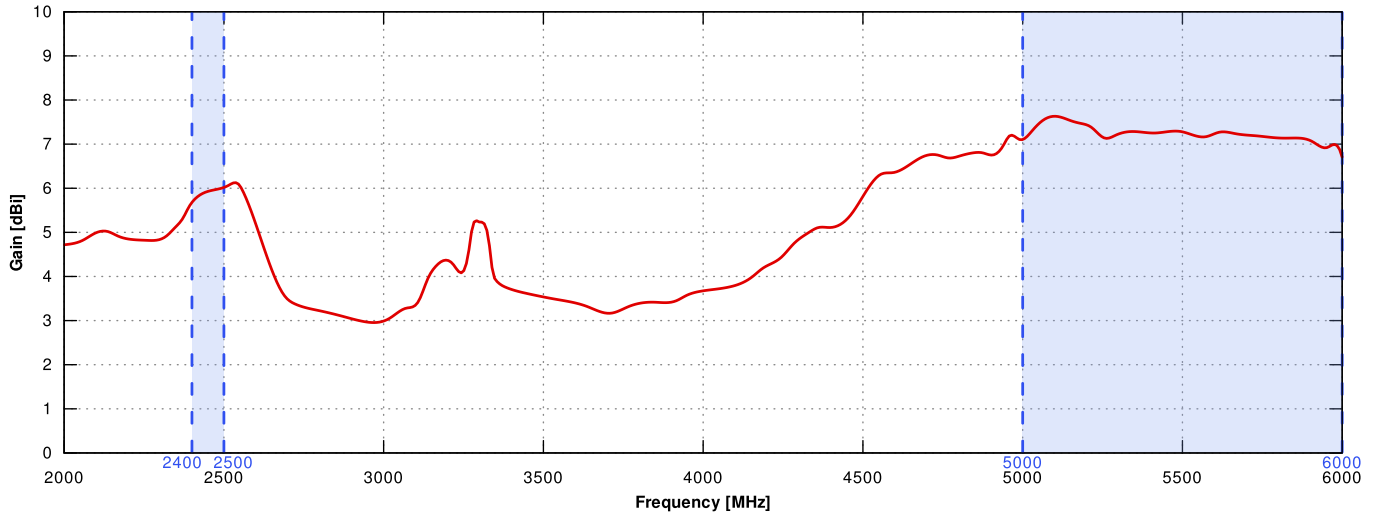



## Gain for LTE antenna

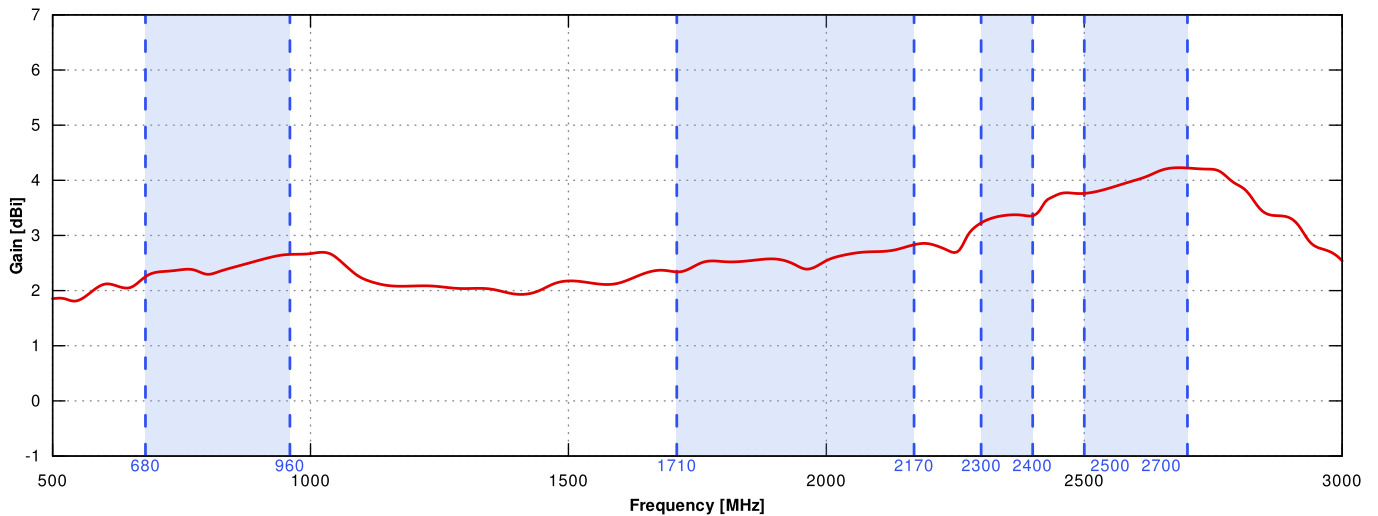


## LTE from 700MHz to 900MHz

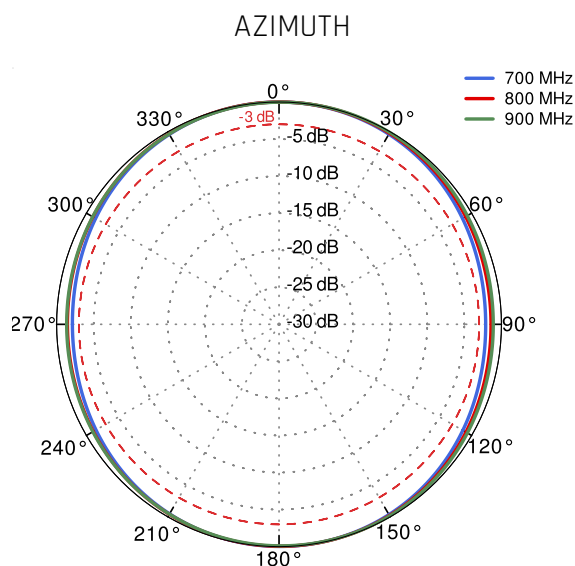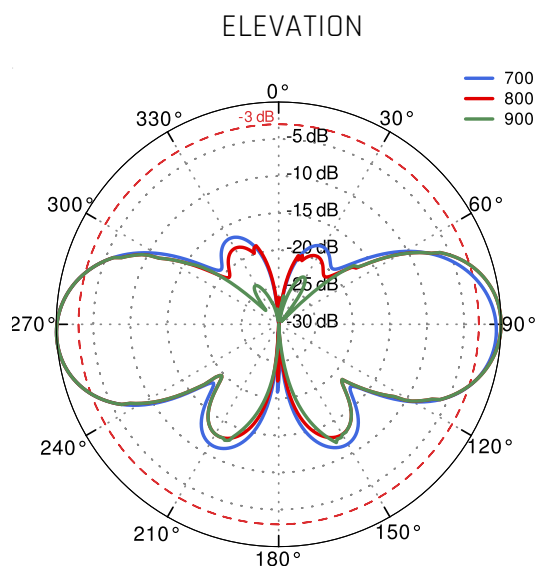


## LTE from 1.71GHz to 2.17GHz

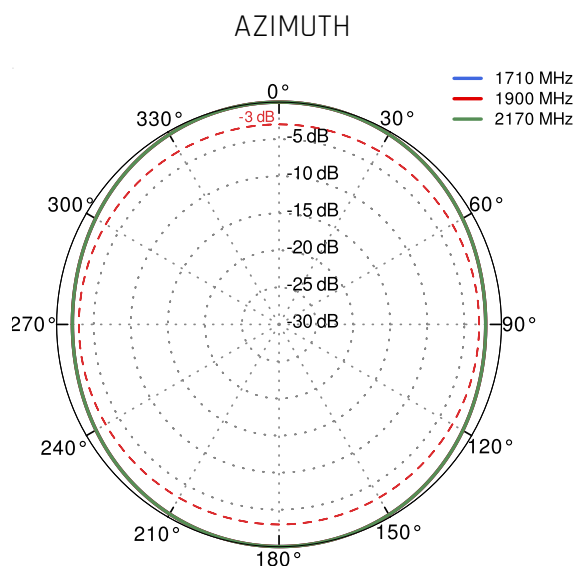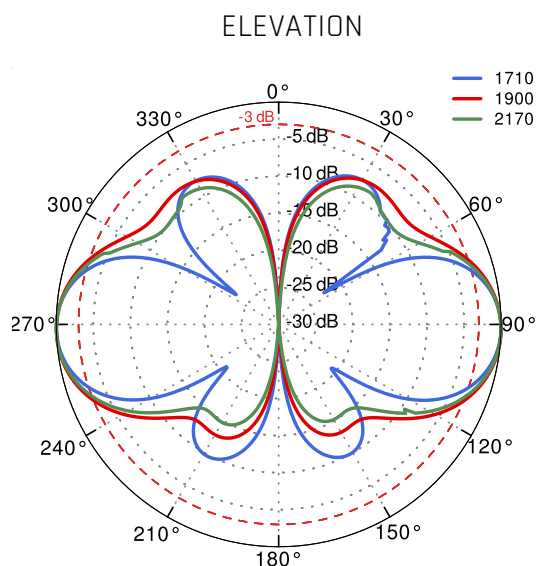

## LTE from 2.3GHz to 2.7GHz

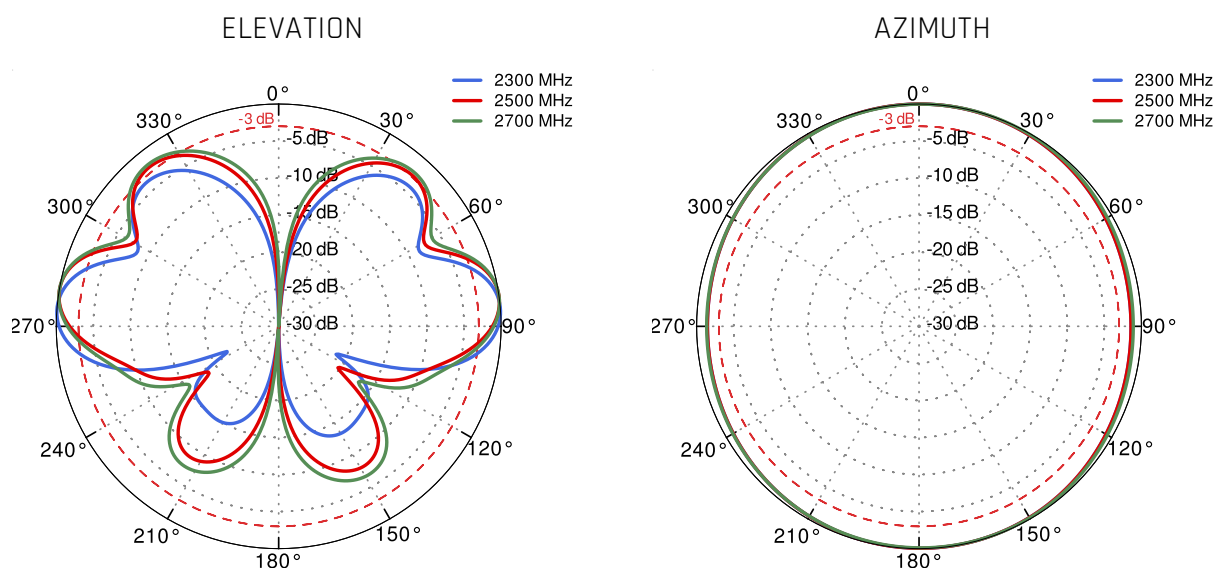

## Wi-Fi 2.4GHz and 5GHz

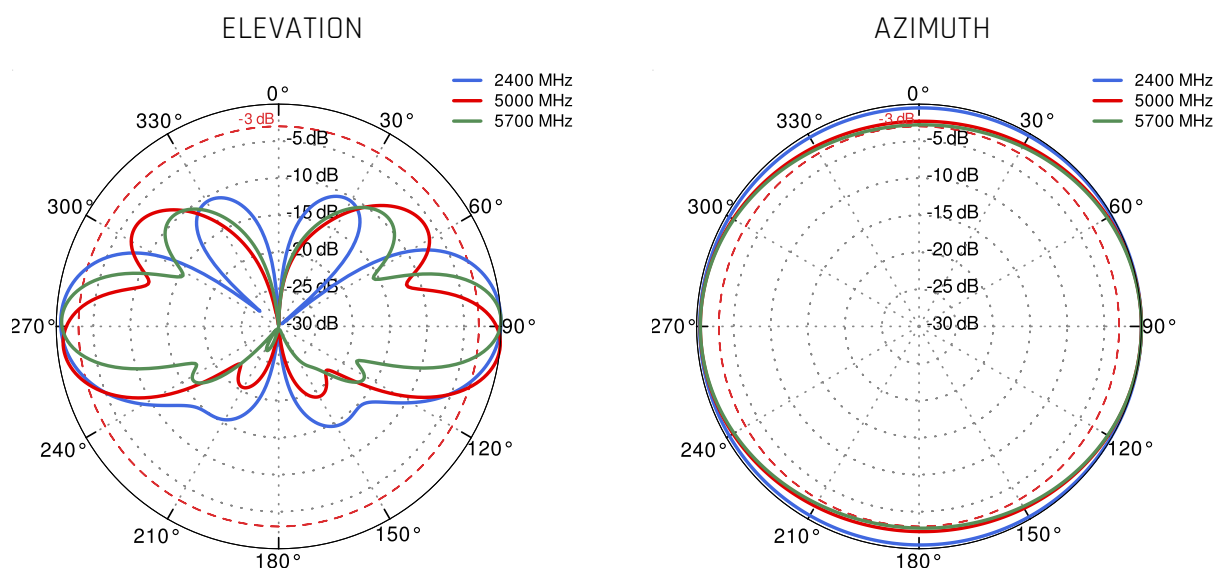



## DIMENSIONS

