


QuOmni 7V-4 Nf Wi-Fi 6E

QuOmni 7V-4 Wi-Fi 6E offers a 360 degrees, 6dBi (2.4GHz) & 7.5dBi (5GHz and 7GHz) gain signal. It is a perfect indoor and outdoor device for industrial installations.

QuOmni 7V-4 is a concurrent dual band, Vertical polarity, MIMO 4x4 omni antenna. It simultaneously operates at **2.4GHz** with 6dBi gain and **5GHz+7GHz** with 7.5dBi gain. It is a futureproof solution with **Wi-Fi 6E** and **Wi-Fi 7** support. This antenna is predicted to be installed as the hotspot in parks, stadiums, warehouses, production halls, malls, lecture halls or another public places. Its aesthetic design is acceptable in most of the visible places. Wide frequency range (2.4-2.5GHz & 5.0-7.2GHz) helps to find suitable frequency for the most effective operation. The antenna comes with four Nf connectors.

Wi Fi 6E
4x4 MIMO
**2.4GHz + 5GHz
6GHz + 7GHz**
7 dBi
**OMNI
DIRECTIONAL**
IP 67
-40° TO +80°**FOUR INTEGRATED NF CONNECTORS****OUTDOOR ANTENNA WORKS IN ANY
WEATHER CONDITIONS, IP67****ANTENNA PERFECTLY MATCHED WITH
THE ROUTER****MADE IN EUROPE**

WI-FI SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz: 6dBi 5 GHz: 7.5dBi 7 GHz: 7.5dBi
VSWR	< 1.50, max < 2.00
BEAMWIDTH	360°/25°
POLARIZATION	Vertical
IMPEDANCE	50 Ω
MAX INPUT POWER	50W
DC GROUND	Yes

MECHANICAL SPECIFICATION

MATERIAL	ABS
CONNECTOR	4xNf
OUTER DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg
OPERATING TEMPERATURE	-40°C to 80°C -40°F to 176°F

MOUNTING KIT

MATERIAL	Galvanized steel
WEIGHT	0.4kg
MOUNTING PLACE	Wall or ceiling or mast
MAST DIAMETER	40-60 mm 1.57-2.36 inch

COMPATIBLE ROUTERS

VARIANT: 07V.4NF _____


DIGI	TX64
ADTRAN	Bluesocket 1925, Bluesocket 6120
ADVANTECH	EKI-6333AC-2G, EKI-6333AC-4GP, EKI-6333AC-M12
AEROHIVE NETWORKS	AP1130
ALCATEL-LUCENT	Stellar AP1222, Stellar AP1322
ARISTA	O-105E
ARUBA	AP-314, AP-324, AP-334, AP-344, AP-514, AP-534, AP-584, AP-634, IAP-314, IAP-324, IAP-334
CAMBIUM NETWORKS	ePMP 4600

CISCO	AIR-AP1562E, AIR-AP1572EAC, AIR-AP1572EC, AIR-AP1852E, AIR-AP2602E, AIR-AP2702E, AIR-AP2802E, AIR-AP3602E, AIR-AP3702E, AIR-AP3802E, AIR-AP3802P, AIR-CAP1532E, AIR-CAP2702E, AIR-CAP3702E, AIR-CAP3702P, Catalyst 9115AXE, Catalyst 9120AXE, Catalyst 9120AXP, Catalyst 9130AXE, Catalyst 9163E, Catalyst IW9165E, IW3702-2E, IW3702-4E, IW6300, MR42E, MR46E, MR53E, MR74, MR76, MR84, MR86
COMSET	CM770W-6
CRADLEPOINT	E3000
D-LINK	DWL-6600AP, DWL-6610APE, DWL-8600AP, DWL-8710AP
DIGI	TX64
ENGENIUS	EAP1300EXT, ECW160, ECW260, ENH1350EXT, ENS620EXT, ESW850, EWS850-FIT
EXTREME NETWORKS	AP 305Cx, AP 360E, AP 3965E, AP 8533, AP3000X, AP310e
FORTINET	AP1020E, AP822E, FAP-222C, FAP-223C, FAP-223E, FAP-224D, FAP-433F, FAP-433G, FAP-C225C, FAP-U223EV, FAP-U432F
FOUR-FAITH	5G Industrial CPE F-NR200
HUAWEI	AirEngine 9700D-S, AP6150DN, AP6510DN-AGN, AP6610DN-AGN, AP6760R-51E, AP8150DN
JUNIPER NETWORKS	AP41E
MIKROTIK	RB912
MILESIGHT	UR75
MIST	AP32E, AP41E, AP43E, AP61E
PEPLINK	AP Pro AX, Balance 310 fiber 5G, MAX HD2, MAX HD4
RUCKUS	T750SE


SIEMENS	6GK5788-1GY01-0AA0, 6GK5748-1GY01-0AA0, SCALANCE W1788
WAVETEL	W3604 Multi-WAN, W3608 Multi-WAN
WLINK	G930
XIRRUS	XH2-120
OTHER	4 * N-male, 4 * RPSMA, 4 * RPTNC

PLOTS

VSWR 

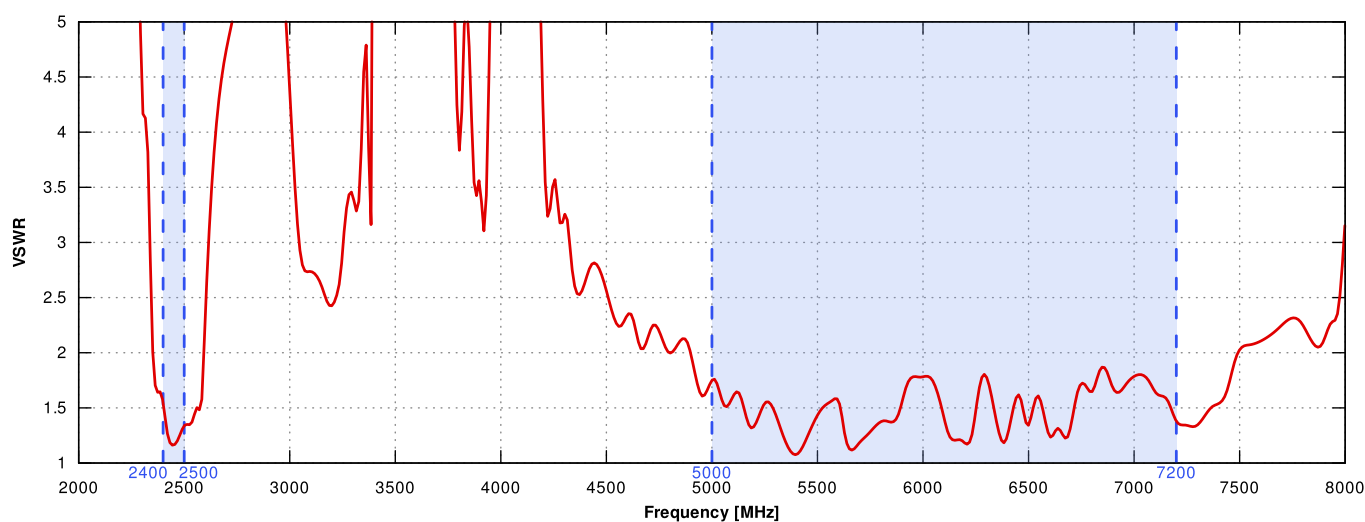


GAIN

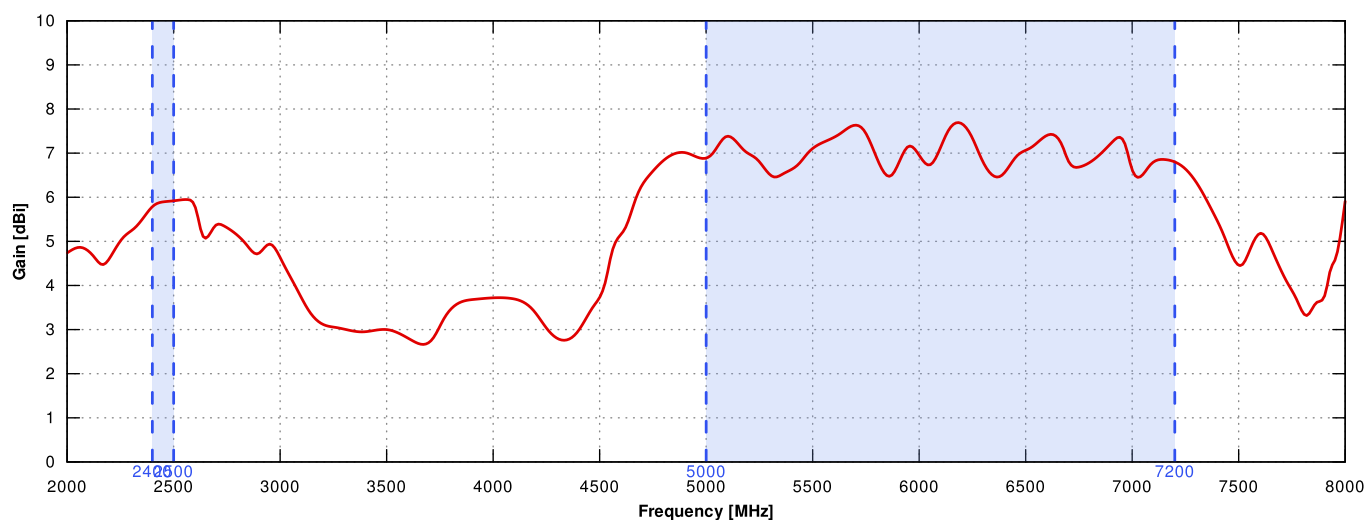


2.4GHz and 5GHz

AZIMUTH

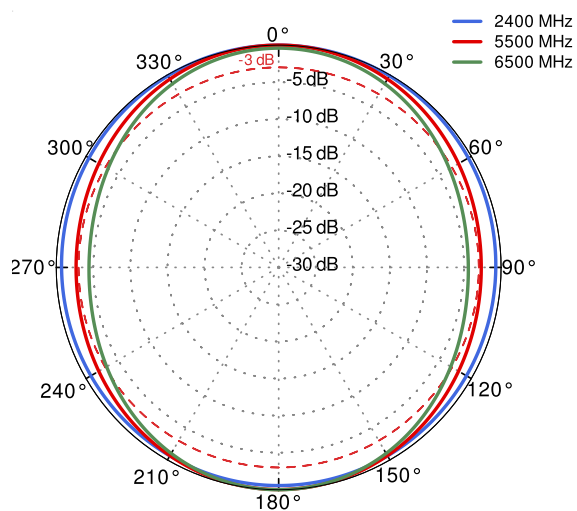

ELEVATION

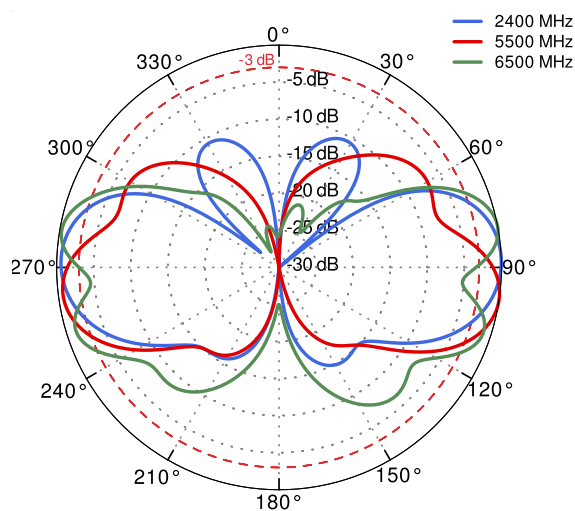

DIMENSIONS

