

QuSpot for Teltonika RUTX10

Integrated outdoor multi band Wi-Fi omni antennas + Bluetooth antenna + place to install Teltonika RUTX10 (All-in-one)

QuSpot omni LTE antenna for Teltonika **RUTX10** router is a perfect outdoor device for mobile and fixed installations like industrial, CCTV, hotspots, yachts, boats, campers, RV etc. It has embedded also Wi-Fi dual band 2.4 & 5GHz omni antenna and Bluetooth omni antenna. If you use **RUTX10** with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

This product is also compatible with **RUTM10**. If used with RUTM10, the Bluetooth antenna is unused.



**2.4GHz
5GHz**



BLUETOOTH



7 dBi



**OMNI
DIRECTIONAL**



2x2 MIMO



IP 68



-40° TO +80°



OUTDOOR ANTENNA WORKS IN **ANY
WEATHER CONDITIONS**, IP68




ANTENNA **PERFECTLY MATCHED** WITH
THE ROUTER



PASSIVE **POE SUPPORT**



MADE IN **EUROPE**

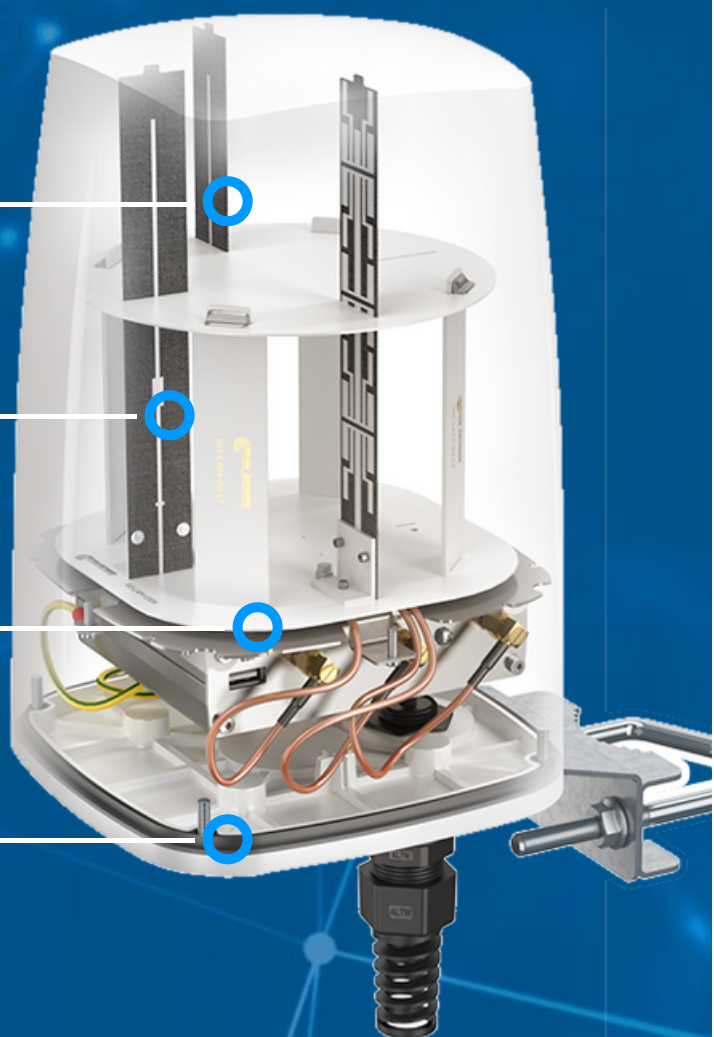

WI-FI ANTENNA SPECIFICATION

| | |
|--------------|--|
| FREQUENCY | 2.4 - 2.5 GHz 4.70 - 6.00 GHz |
| GAIN | 2.40 - 2.50 GHz : 6 dBi 4.70 - 6.00 GHz : 7 dBi |
| VSWR | <2.00 |
| BEAMWIDTH | 360°/25° ±5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

BLUETOOTH ANTENNA SPECIFICATION


| | |
|--------------|-----------------|
| FREQUENCY | 2.40 - 2.50 GHz |
| GAIN | 6 Dbi |
| VSWR | <2.00 |
| BEAMWIDTH | 360°/25° ±5° |
| POLARIZATION | Vertical |
| IMPEDANCE | 50 Ω |

MECHANICAL SPECIFICATION


| | |
|-----------------------|---|
| MATERIALS | ABS, aluminum, PTFE |
| CONNECTOR TYPE | RJ45 |
| INGRESS PROTECTION | IP68 |
| DIMENSIONS | 160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch |
| WEIGHT | 1.5 kg 3.31 lbs |
| OPERATING TEMPERATURE | From -40°C to 80°C From -40°F to 176°F |
| MAST DIAMETER | 40-60 mm 1.57-2.36 inch |

PLOTS



VSWR for Wi-Fi antenna

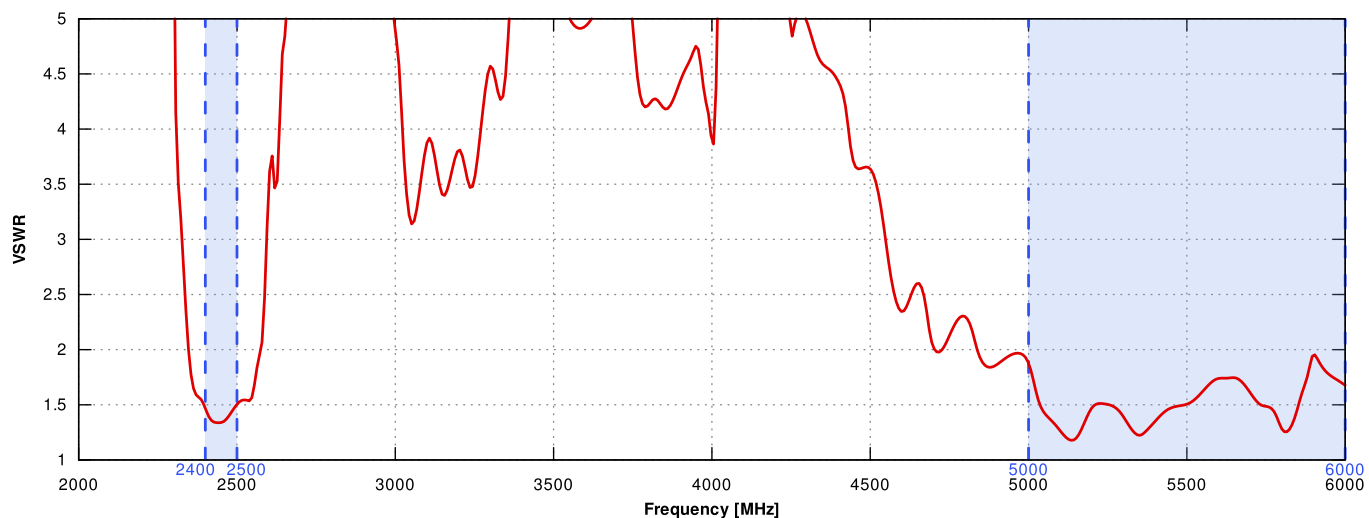

Gain for Wi-Fi antenna

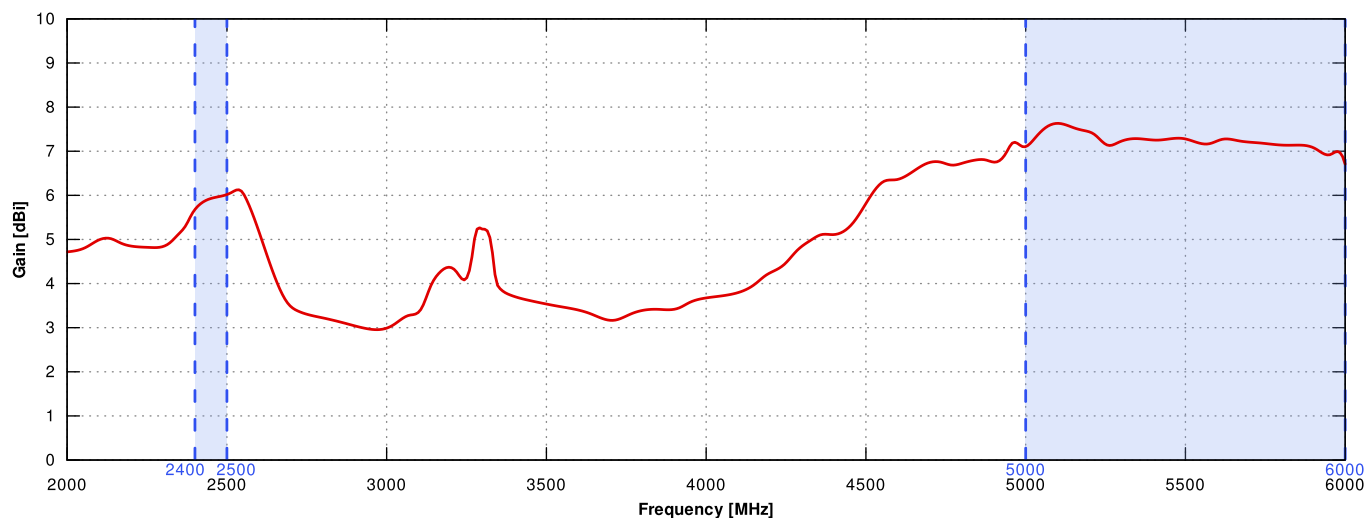

Wi-Fi 2.4GHz and 5GHz

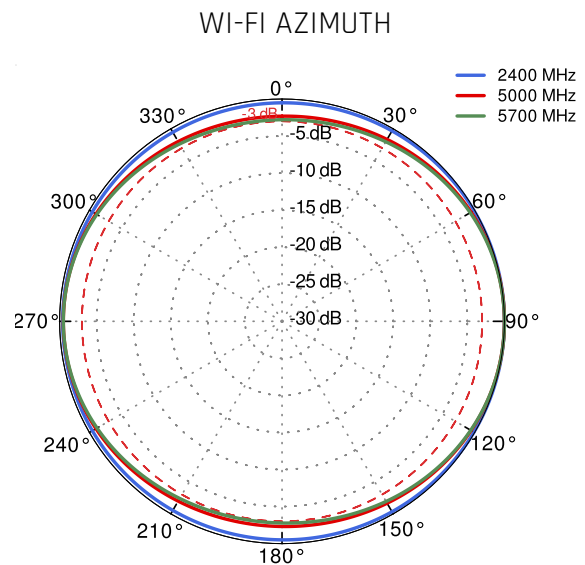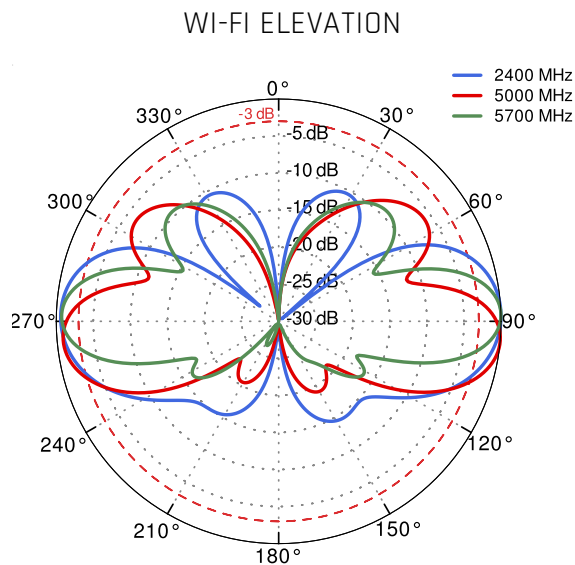

DIMENSIONS

