

# QuSpot for RUT2xx ver. US (Band71)

**Integrated multi-band LTE omni antenna ver. US + WiFi omni antenna + place to install Teltonika RUT241, RUT240 or 230 (All-in-one)**

QuSpot omnidirectional LTE antenna ver. US for Teltonika **RUT260, RUT241, RUT240, RUT230 or RUT200 routers** is a perfect outdoor device for mobile and fixed installations e.g. CCTV, hotspots, industrial areas, campervans, ships etc.. In addition to having omnidirectional, multi-band LTE antennas, **it has also embedded omnidirectional Wi-Fi antenna**. If you use RUT2xx with QuSpot antenna, you get an integrated complete solution with embedded router and multi band antennas in one enclosure.

**4G**

LTE

B  
A  
N  
D  
**71**

617-3800MHz

**Wi Fi**

2.4GHz



4 dBi

OMNI  
DIRECTIONAL

IP 67



-40° TO +80°

OUTDOOR ANTENNA WORKS IN **ANY**  
**WEATHER CONDITIONS**, IP67ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER

WALL OR MAST MOUNTING SYSTEM

MADE IN **EUROPE**

## LTE ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.2 GHz 2.3 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	617 - 960 MHz : 3 dBi 1.7 - 2.2 GHz : 3.5 dBi 2.3 - 2.7 GHz : 3.5 dBi 3.3 - 3.8 GHz : 4dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 106
VSWR	<1.80, max <2.00
BEAMWIDTH	360°/35° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz
GAIN	6 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP67
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
MAST DIAMETER	40-60 mm 1.57-2.36 inch

## FREQUENCY BANDS

LTE / 4G GSM	694 MHz	5	8	12	13	14	17	18	19	20	26	27	28	29	44	67	68	85	103	n81	n82	n83	n89	100	960 MHz
LTE / 4G UMTS	1710 MHz	1	2	3	4	9	10	25	33	34	35	36	37	39	n80	n84	n86	n95	n98	n101					2170 MHz

**LTE / 4G WCS DARS**

2300  
MHz

30

40

n97

2400  
MHz

**LTE / 4G**

2400  
MHz

7

38

41

53


69

n90


2700  
MHz

## PLOTS


VSWR for Wi-Fi antenna

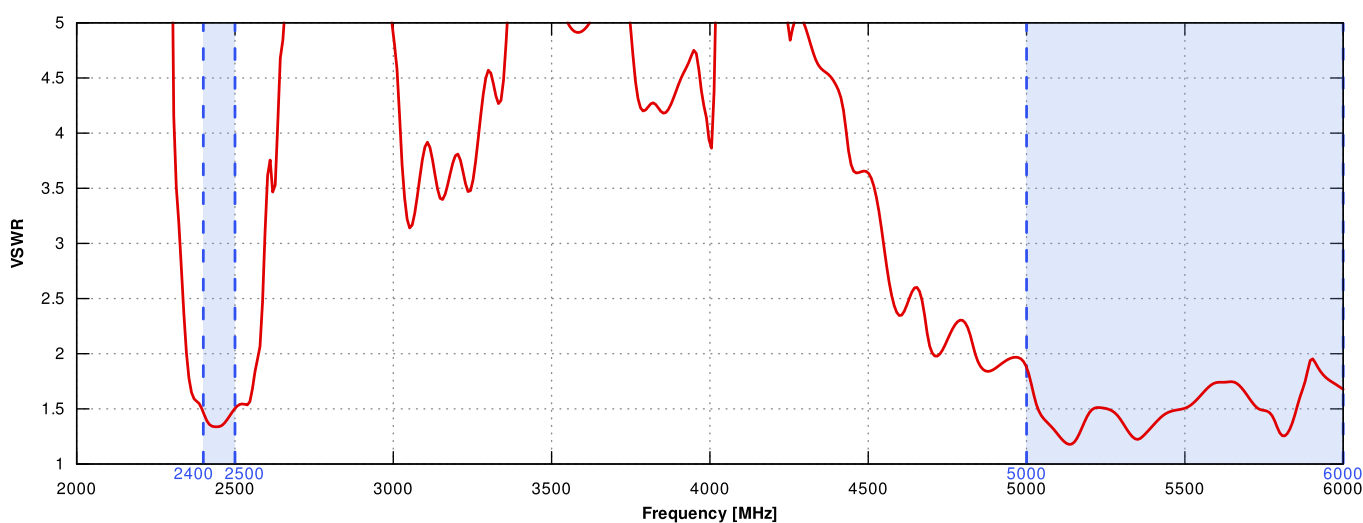


VSWSR for LTE antenna

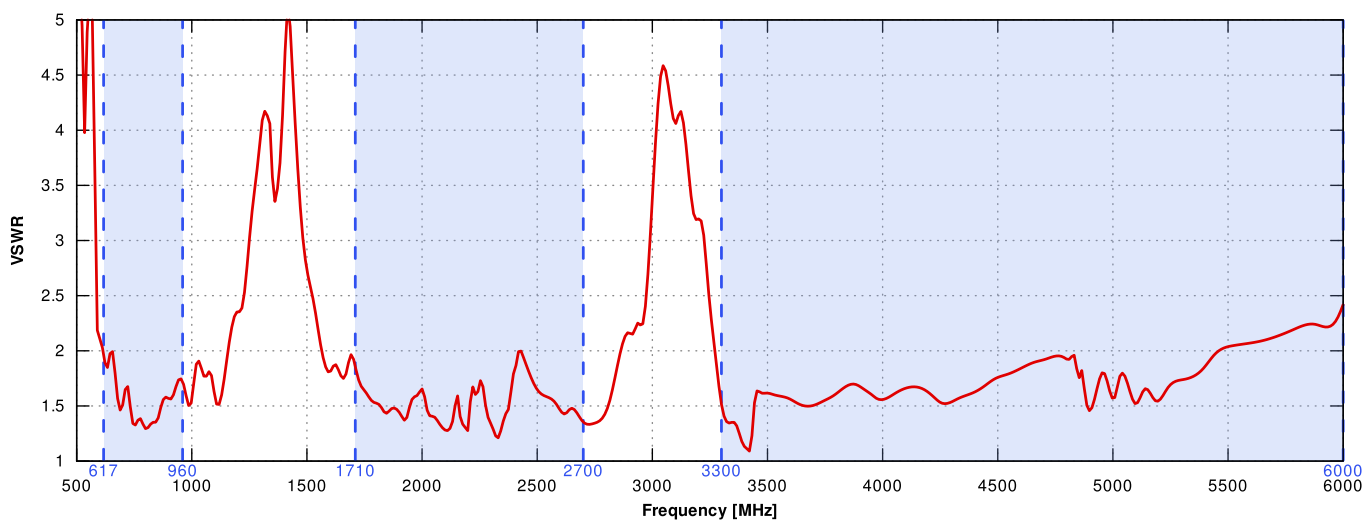


## Gain for Wi-Fi antenna

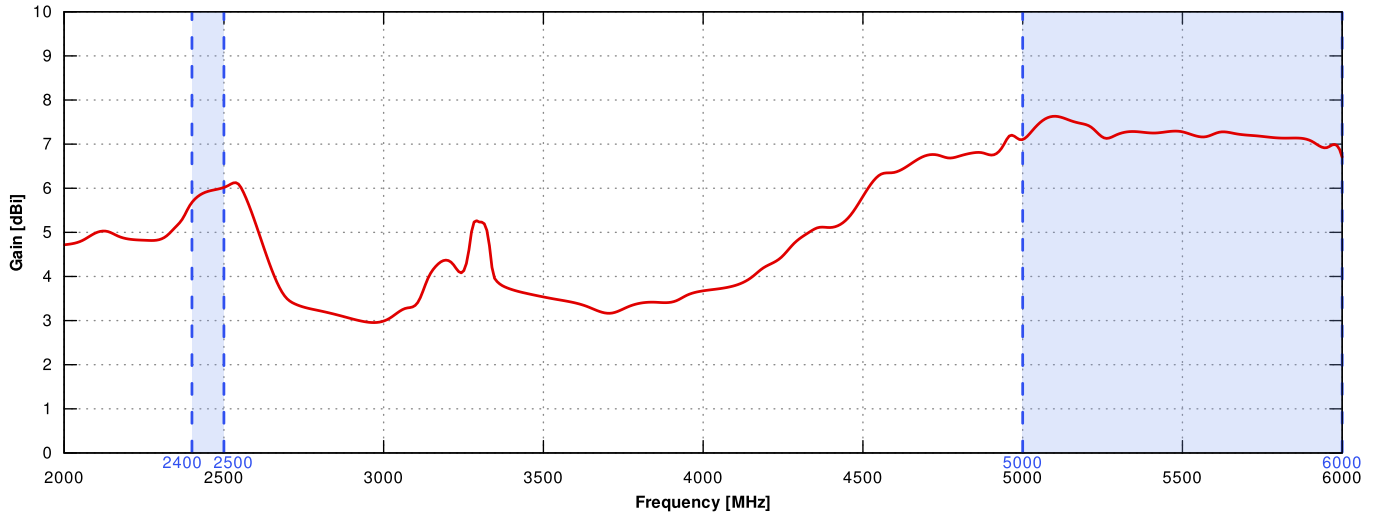


## Gain for LTE antenna

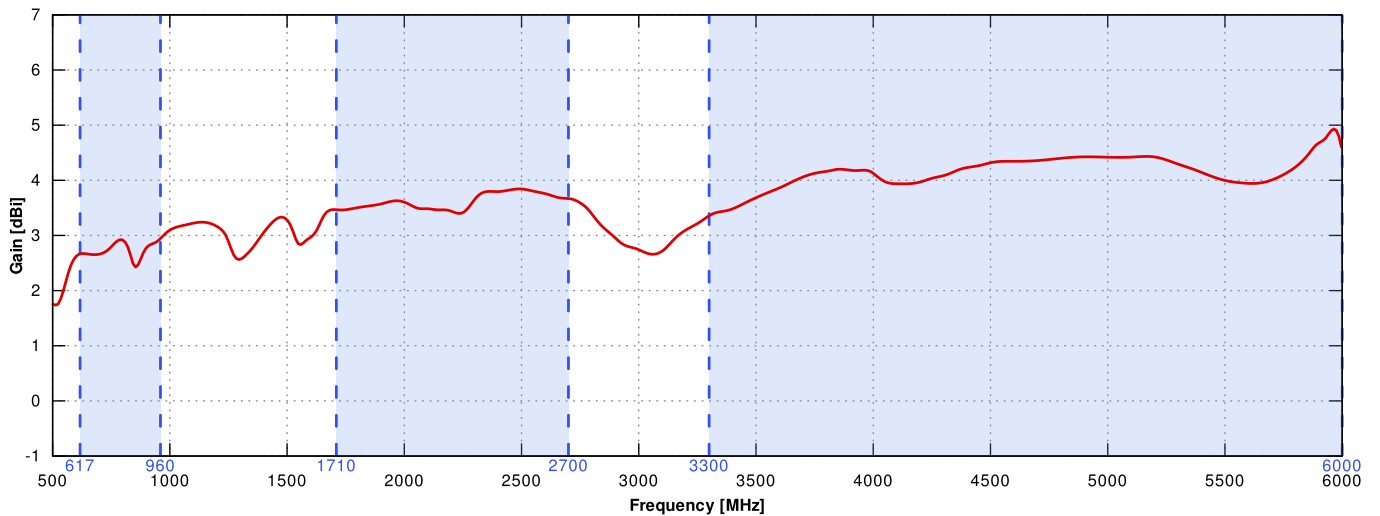


## LTE from 650MHz to 950MHz

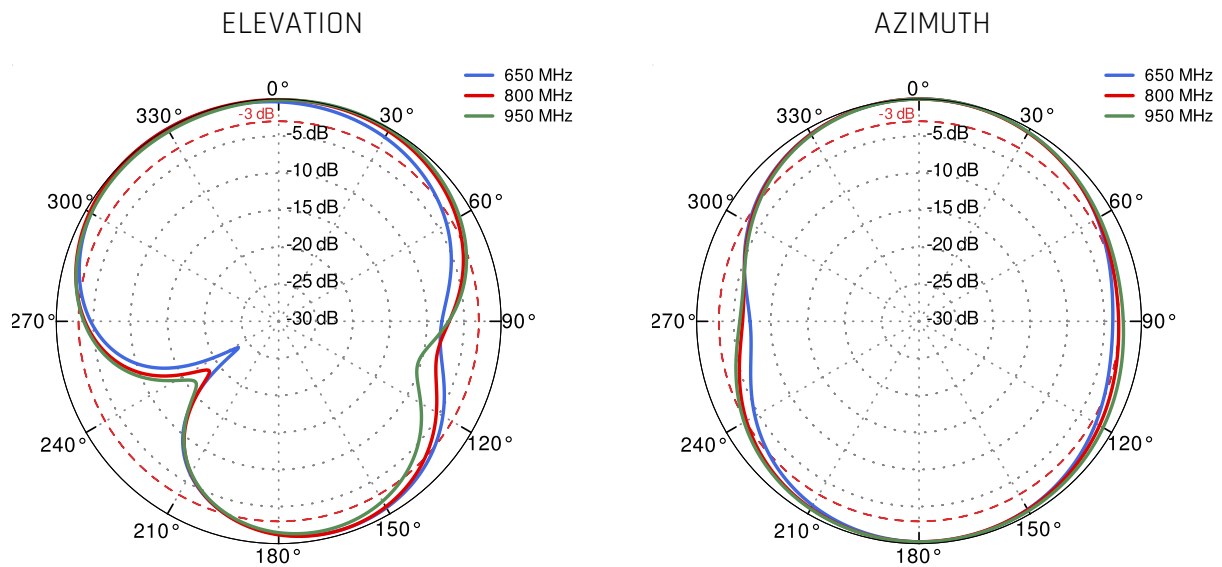


## LTE from 1.71GHz to 2.5GHz

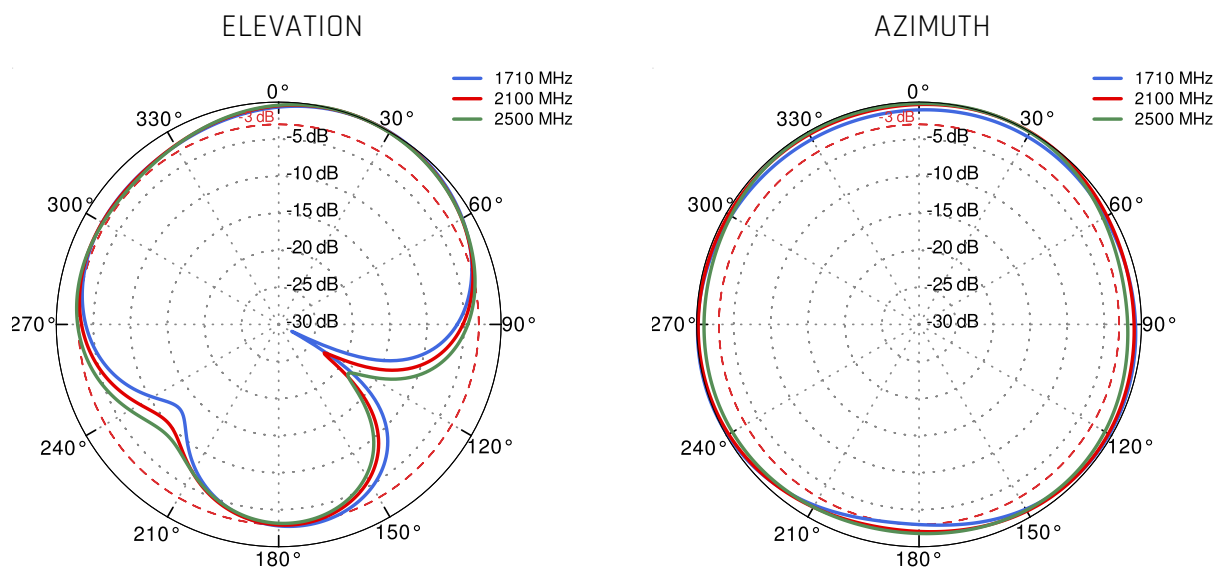

## LTE from 3.3GHz to 4.0GHz

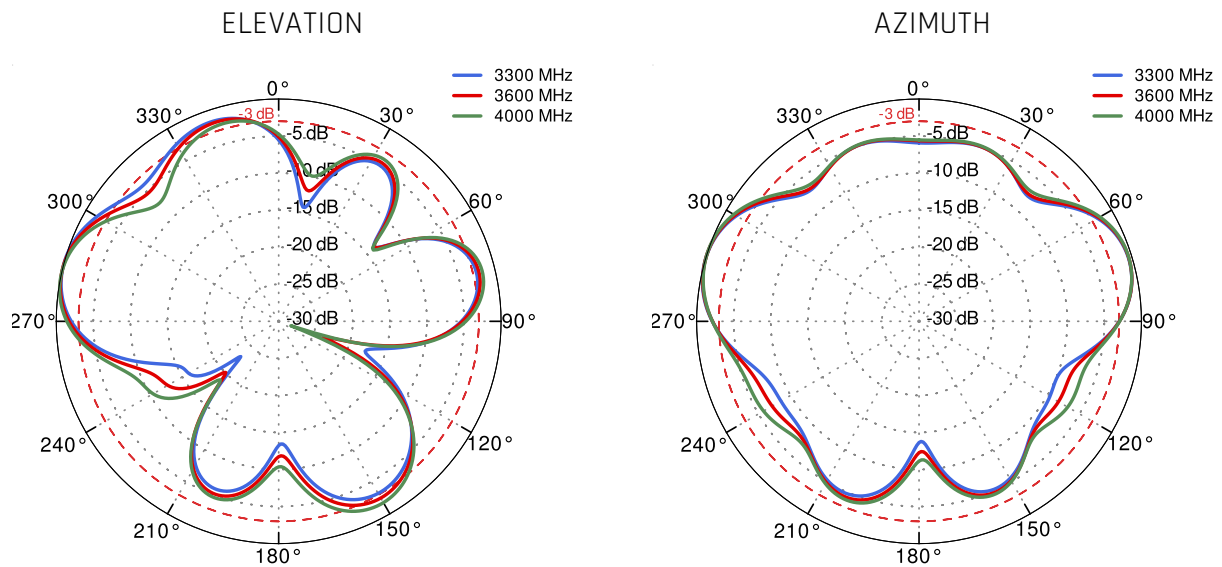

## Wi-Fi 2.4GHz and 5GHz

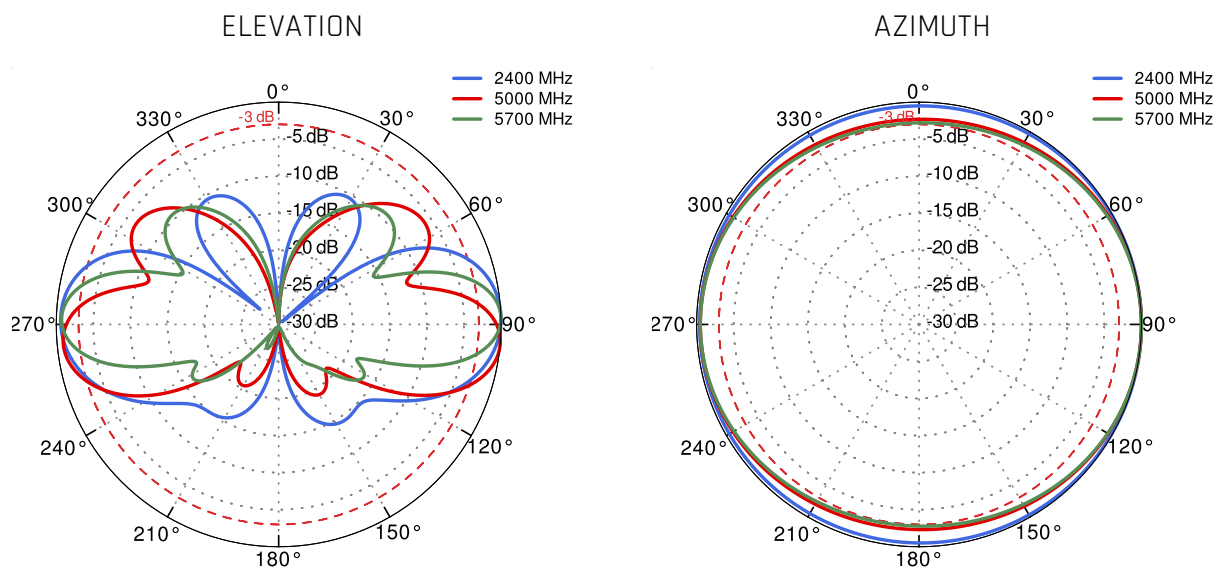

## DIMENSIONS

