

# QuCam for Teltonika RUT241 230V

Outdoor CCTV LTE PoE gateway with embedded LTE router & PoE switch for CCTV cameras.

QuCam for RUT241 is a powerful outdoor industrial gateway for professional CCTV application with embedded PoE switch for up to 3x CCTV cameras and place to install Teltonika RUT241 (not included in gateway set). QuCam for RUT241 also has integrated omnidirectional LTE and Wi-Fi antennas. The mobile router delivers high performance for mission-critical cellular communication in harsh and hazardous environments where a wide operating temperature is required. QuCam for RUT241 is also compatible with the entire RUT2xx series.

**4G**  
LTE**Wi Fi** 2.4GHz  
694-2700MHz  
4 dBi  
OMNI  
DIRECTIONAL  
IP 67  
-40° TO +80°

OUTDOOR ANTENNA WORKS IN ANY  
WEATHER CONDITIONS, IP67



MOUNTING SYSTEM WITH TWO  
PLANES, 60 DEGREES REGULATION




3 X ACTIVE POE OUTPUT (802.3 AF /  
AT)



SIM CARD SLOT



MADE IN EUROPE

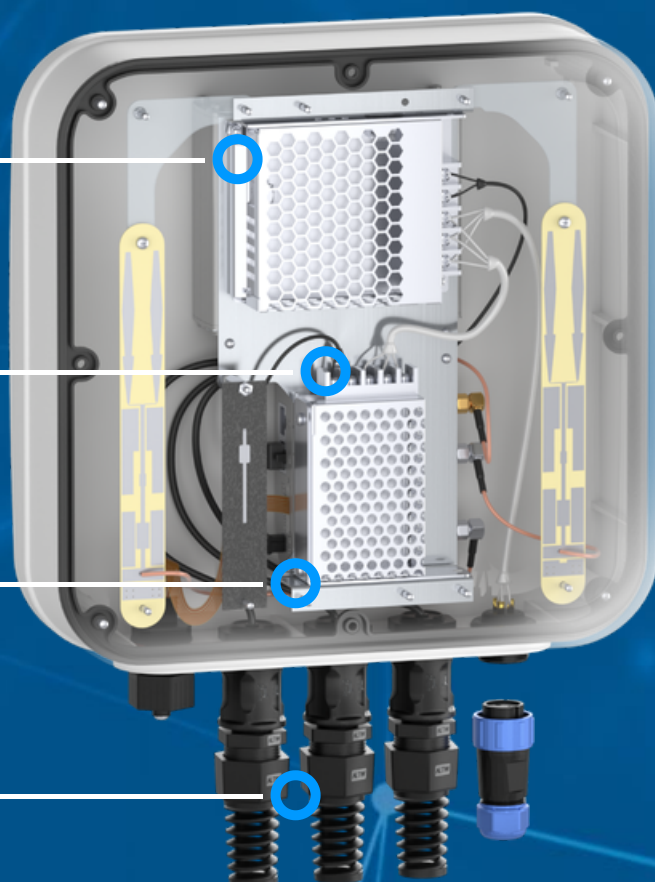

## LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.5 - 2.7 GHz
GAIN	694 - 960 MHz : 2 dBi 1.7 - 2.2 GHz : 2 dBi 2.5 - 2.7 GHz : 4 dBi
SUPPORTED LTE/5G BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 25, 26, 27, 28, 29, 33, 34, 35, 36, 37, 38, 39, 44, 65, 66, 67, 68, 69, 85, 103, n80, n81, n82, n83, n84, n86, n89, n95, n98, n100, n101, n256
VSWR	<1.50, max <2.50
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz
GAIN	3 dBi
VSWR	<1.70, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$

## POWER SUPPLY ELECTRICAL INPUT SPECIFICATION

INPUT VOLTAGE	88 ... 264VAC
INPUT FREQUENCY	47 ... 63Hz
INPUT CURRENT	0,4A/230VAC
INRUSH CURRENT	30A/230VAC
AC LEAKAGE CURRENT	max. 0,75mA/240VAC
EFFICIENCY	85%

## POWER SUPPLY ELECTRICAL OUTPUT SPECIFICATION


OUTPUT VOLTAGE	44 ... 57VDC
OUTPUT POWER	120W
OUTPUT POWER PER PORT	30W
ETHERNET PORTS	Output (PoE): 4x RJ45 10/100/1000Mbps
IEEE 802.3 STANDARDS:	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az

## COMPATIBLE ROUTERS


VARIANT: C240AC

## PLOTS


### VSWR FOR WI-FI ANTENNA

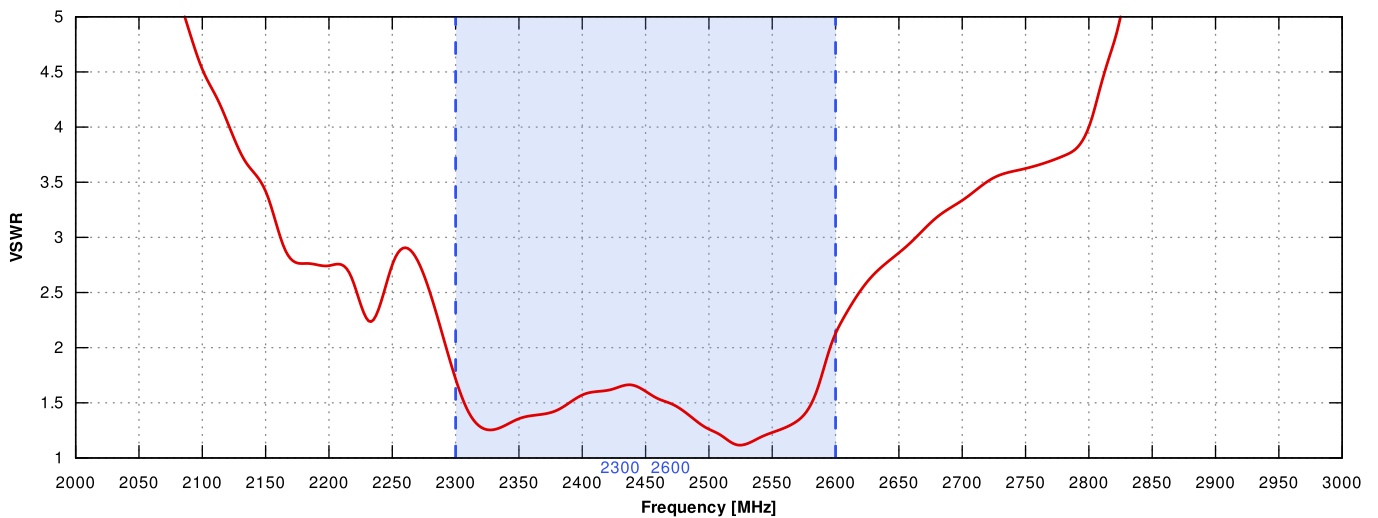


### VSWR FOR LTE ANTENNA

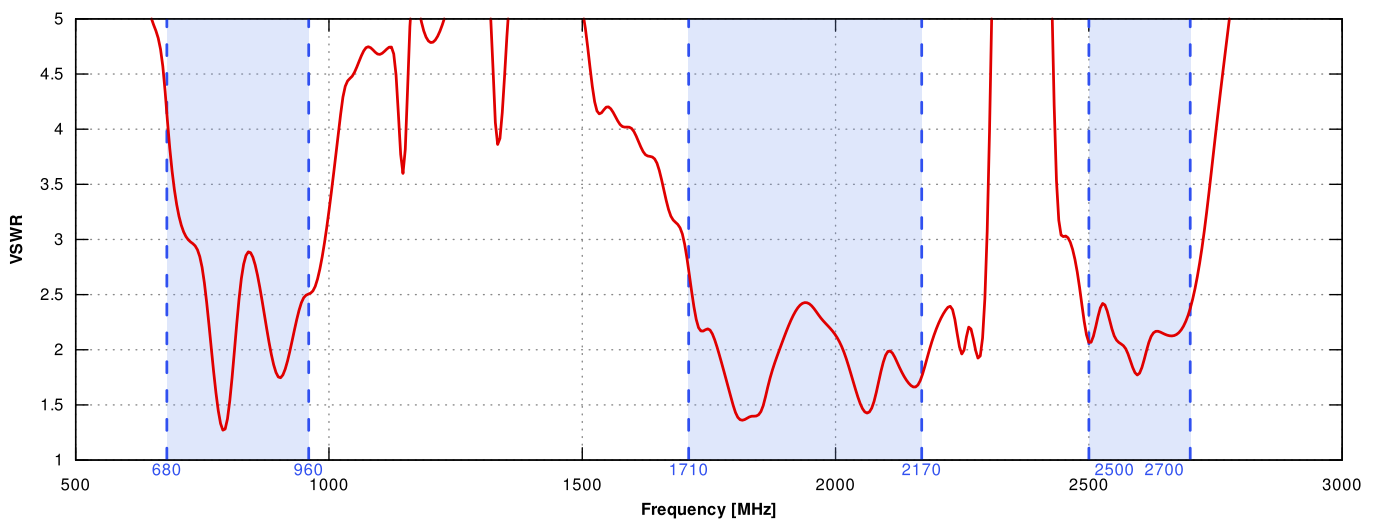



## GAIN FOR WI-FI ANTENNA

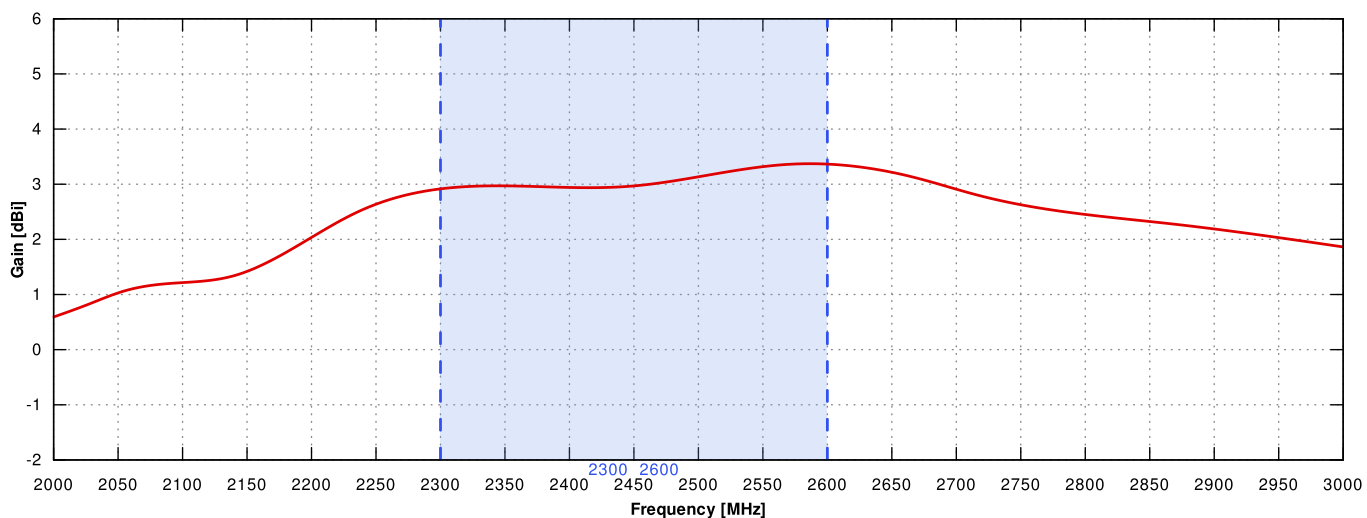



## GAIN FOR LTE ANTENNA

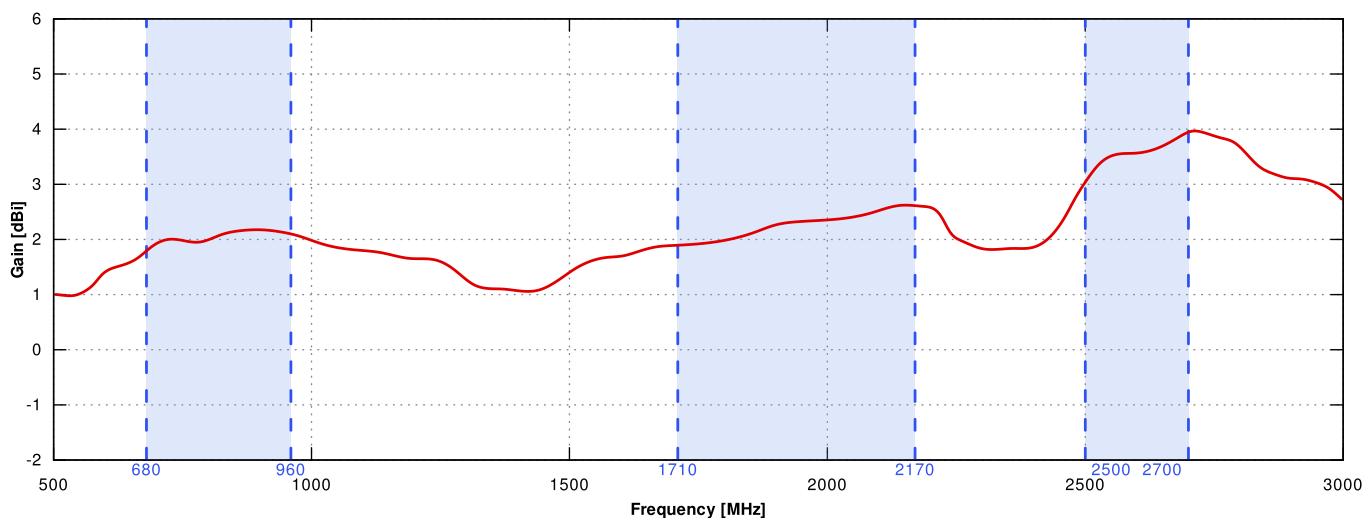



## LTE from 700MHz to 900MHz

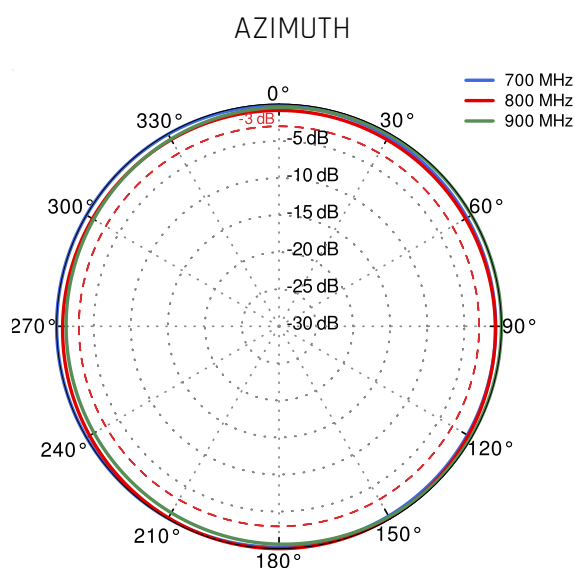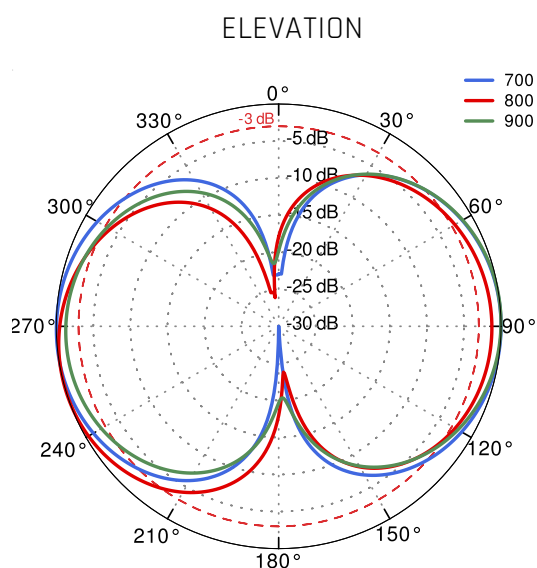



## LTE from 1.71GHz to 2.17GHz

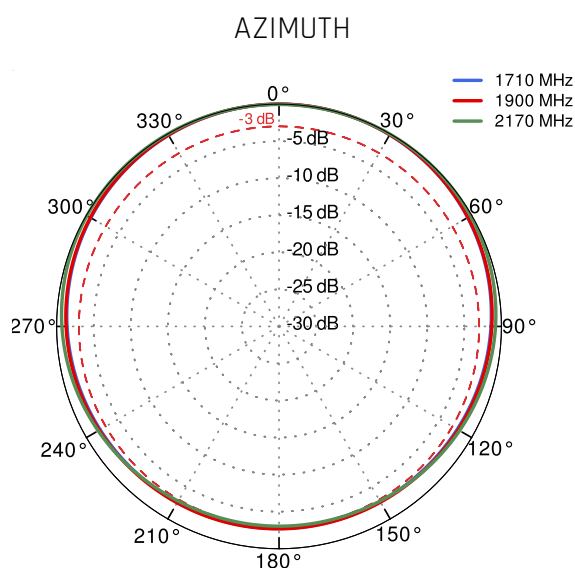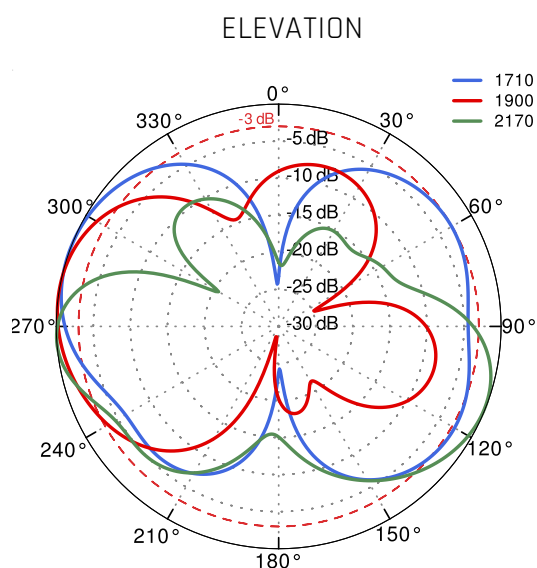

## LTE from 2.3GHz to 2.7GHz

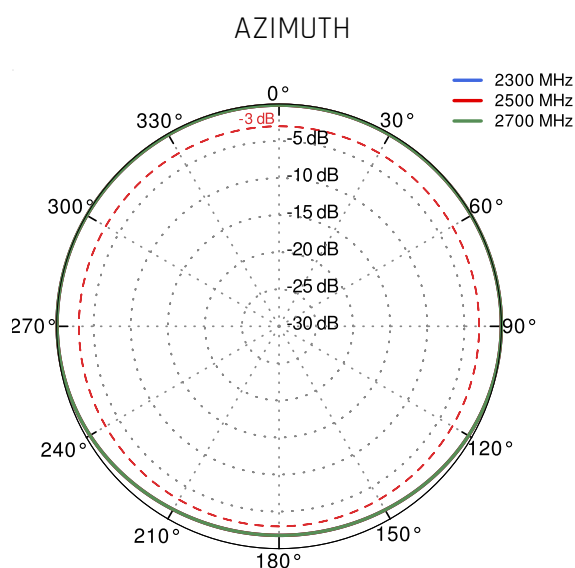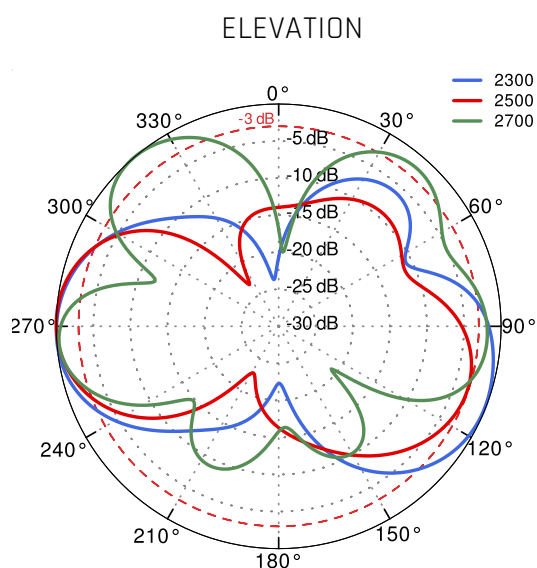

## Wi-Fi 2.4GHz

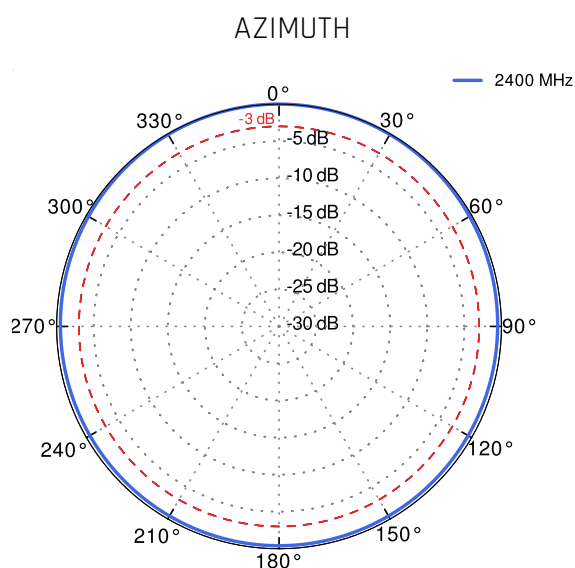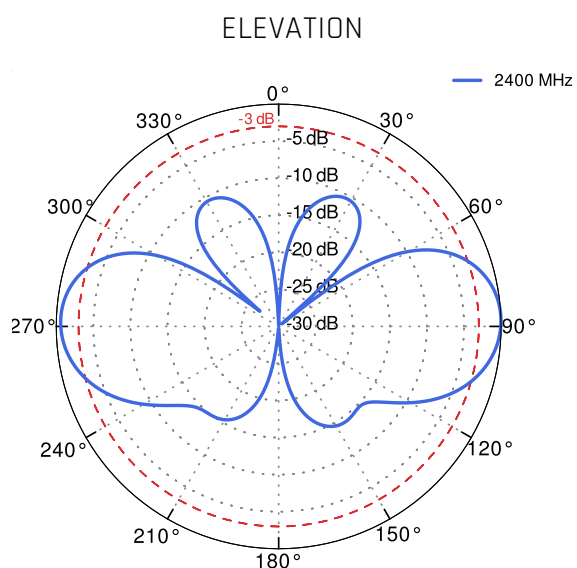

## DIMENSIONS

