

# QuSpot for Ericsson (Cradlepoint) S400

## INTEGRATED MULTI-BAND LTE & 5G OMNI ANTENNA + WI-FI OMNI ANTENNA + PLACE TO INSTALL ERICSSON (CRADLEPOINT) S400 (ALL-IN-ONE)

QuSpot for Ericsson (Cradlepoint) S400 is an outdoor antenna designed to provide reliable wireless connectivity in a variety of environments. This product is an all in one solution that integrates a high gain omnidirectional 5G and Wi-Fi antennas with S400 into a single IP68 (IP67) enclosure. Such integration allows implementation of new outdoor 5G solutions.

QuSpot for Ericsson (Cradlepoint) S400 is an ideal solution for outdoor wireless connectivity in moving applications such as transportation, yachting, boats and camping but also city centres with high signal density.

**5G**  
**617-6000MHz**  
**4 dBi****Wi Fi 6E**  
**OMNI  
DIRECTIONAL**  
**IP 68**  
**-40° TO +80°****BAND  
71**

OUTDOOR ANTENNA WORKS IN **ANY  
WEATHER CONDITIONS**, IP68




ANTENNA **PERFECTLY MATCHED** WITH  
THE ROUTER



802.3AF ACTIVE **POE SUPPORT**



MADE IN **EUROPE**

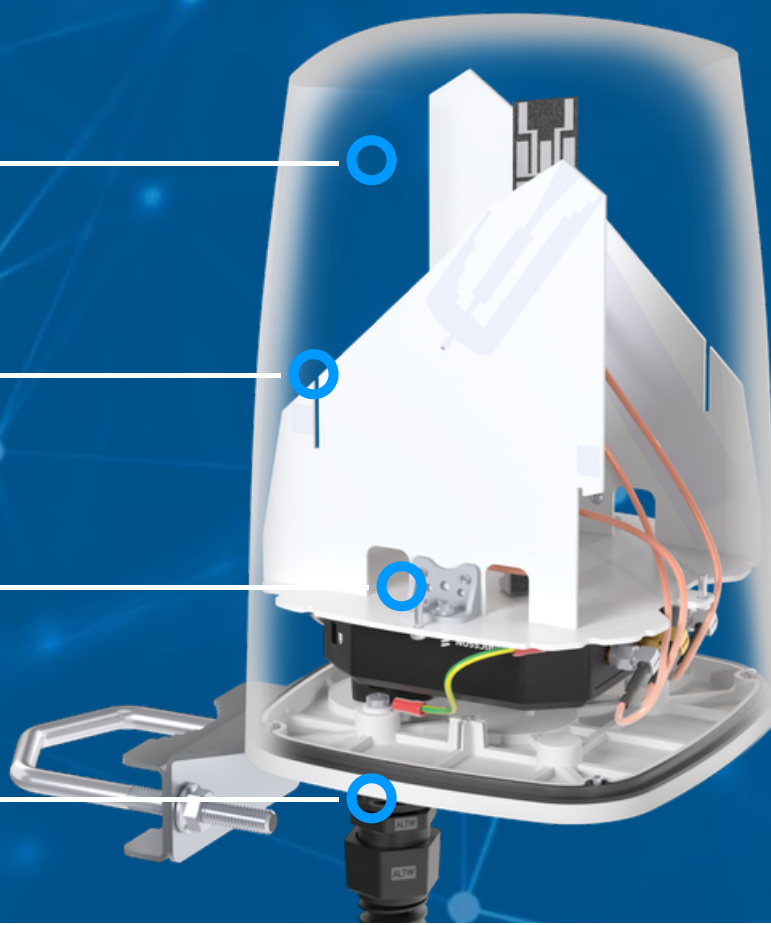

## 5G ANTENNA SPECIFICATION

FREQUENCY	617 - 960 MHz 1.7 - 2.7 GHz 3.3 - 4.7 GHz 5.2 - 6.0 GHz
GAIN	617 - 960 MHz : 2 dBi 1.7 - 2.7 GHz : 4 dBi 3.3 - 4.7 GHz : 4.5 dBi 5.2 - 6.0 GHz : 2 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, 1067, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 71, 85, 103, n77, n78, n80, n81, n82, n83, n84, n86, n89, n90, n95, n97, n98, n100, n101
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n48, n53, n65, n66, n67, n71, n77, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<2.00, max <2.50
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$
CONNECTOR	2x SMA
CABLE TYPE	RG316

## WI-FI ANTENNA SPECIFICATION

FREQUENCY	2.4 - 2.5 GHz 5.0 - 7.2 GHz
GAIN	2.4 - 2.5 GHz : 6 dBi 5.0 - 7.2 GHz : 7.5 dBi
VSWR	<1.50, max <2.00
BEAMWIDTH	360°/25° ±5°
POLARIZATION	Vertical
IMPEDANCE	50 $\Omega$
CONNECTOR	1x RPSMA
CABLE TYPE	RG316

## MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE
CONNECTOR TYPE	RJ45
INGRESS PROTECTION	IP68
DIMENSIONS	160 x 160 x 240 mm 6.3 x 6.3 x 9.45 inch
WEIGHT	1.5 kg 3.31 lbs
OPERATING TEMPERATURE	From -40°C to 75°C From -40°F to 167°F

## MAST DIAMETER

40-60 mm  
1.57-2.36 inch

## FREQUENCY BANDS

### LTE / 4G


	1	2	3	4	5	7	8	
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
617 MHz	29	30	33	34	35	36	37	4300 MHz
	38	39	40	41	42	43	44	
	48	49	52	53	65	66	67	
	68	69	71	85	103	106		

### 5G


	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
617 MHz	n48	n53	n65	n66	n67	n71	n77	4300 MHz
	n78	n80	n81	n82	n83	n84	n85	
	n86	n89	n90	n95	n97	n98	n100	
	n101	n256						

## PLOTS


VSWR for 5G/LTE antenna 

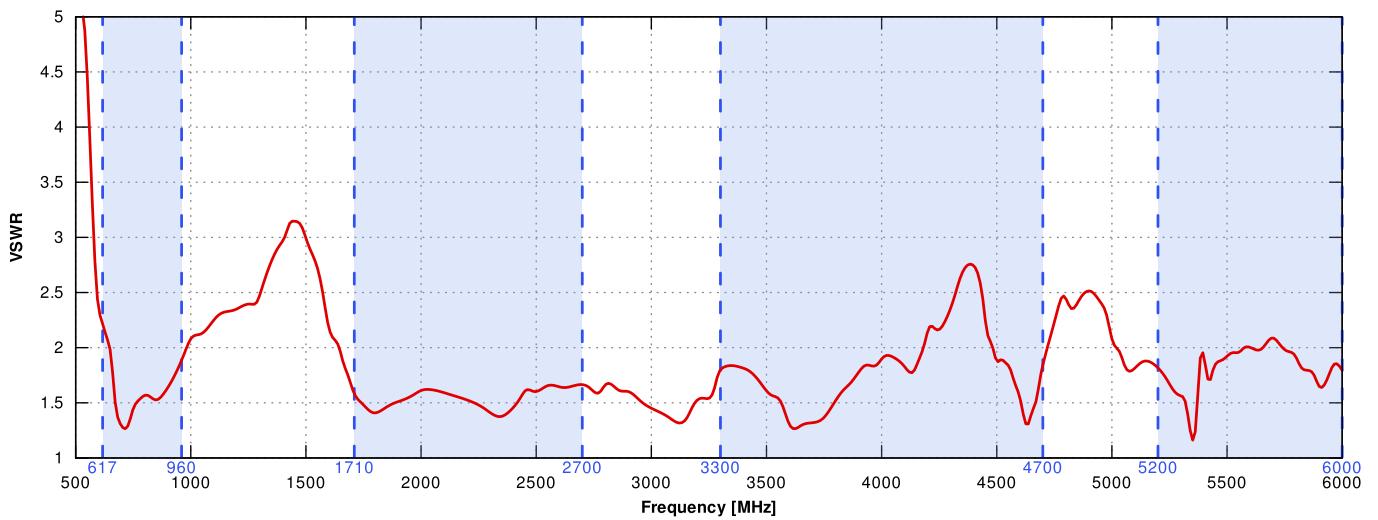


VSWR for Wi-Fi antenna 

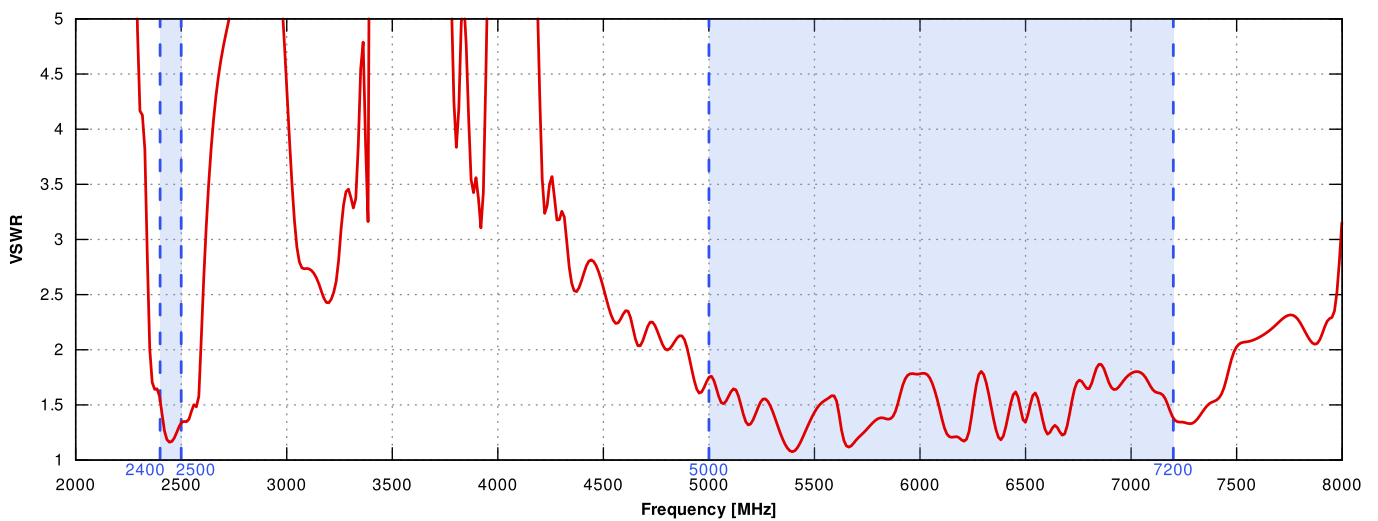


Gain for 5G/LTE antenna

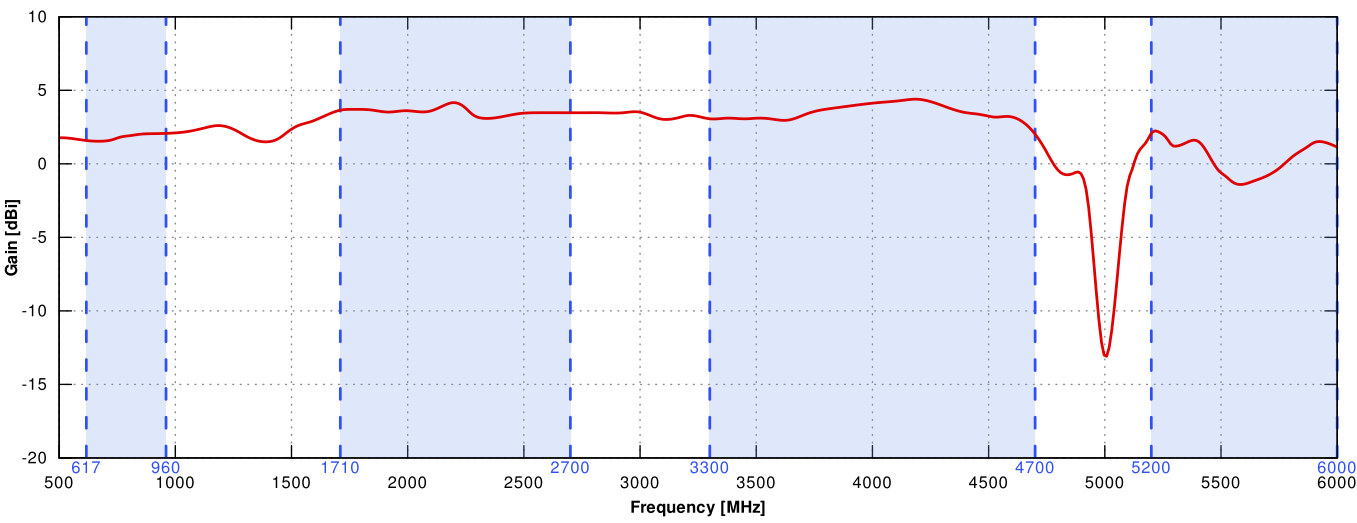


Gain for Wi-Fi antenna

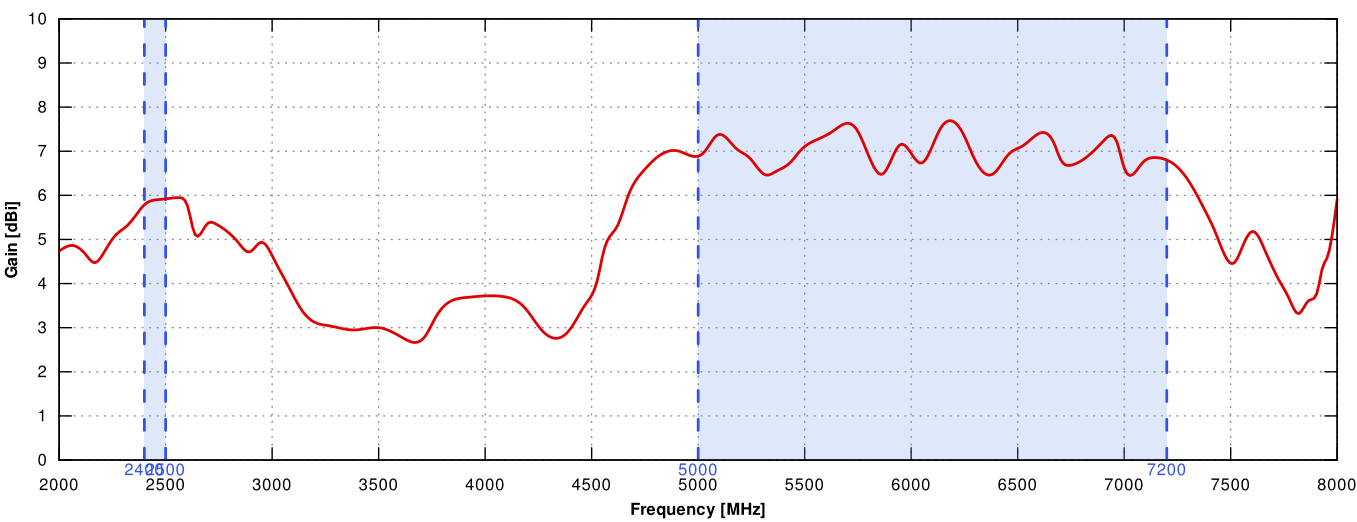


## 5G/LTE from 650MHz to 950MHz

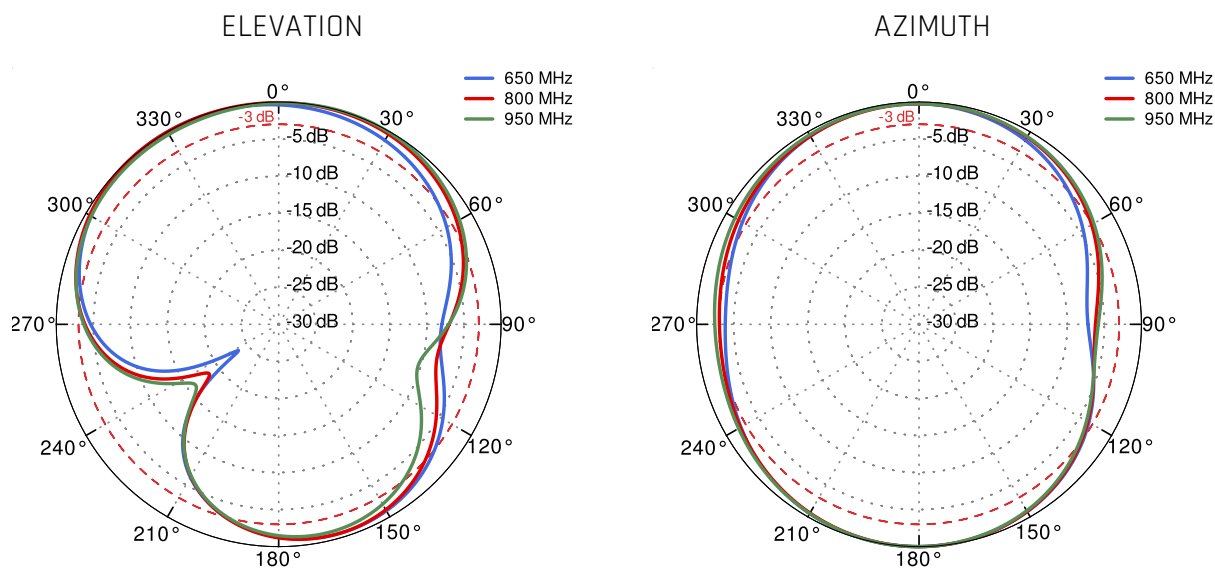


## 5G/LTE from 1.71GHz to 2.5GHz

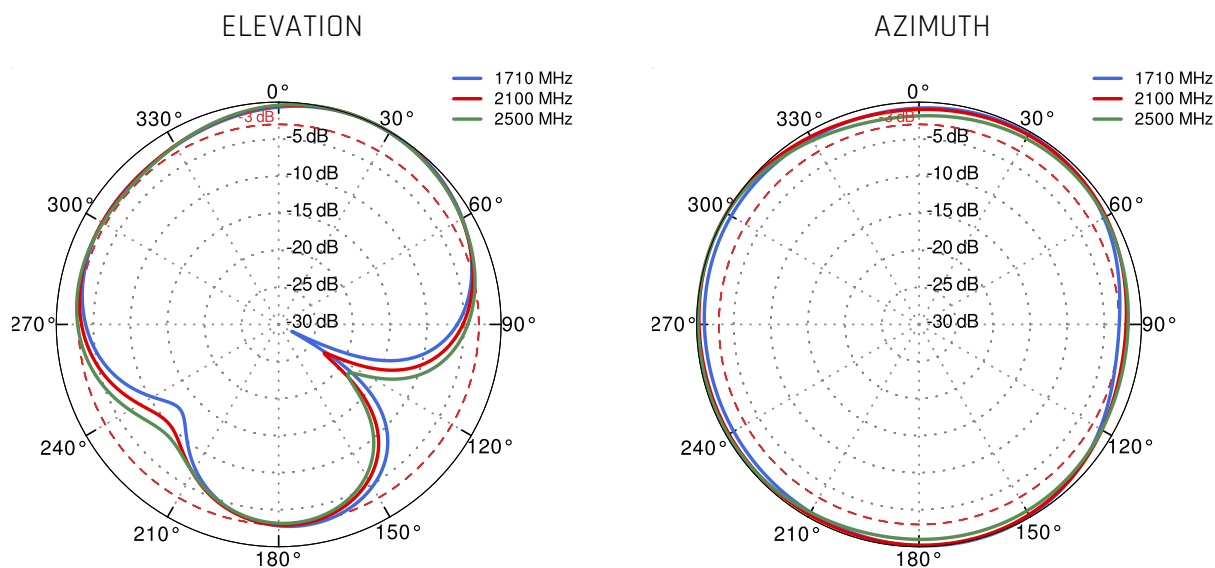

## 5G/LTE from 3.3GHz to 4.0GHz

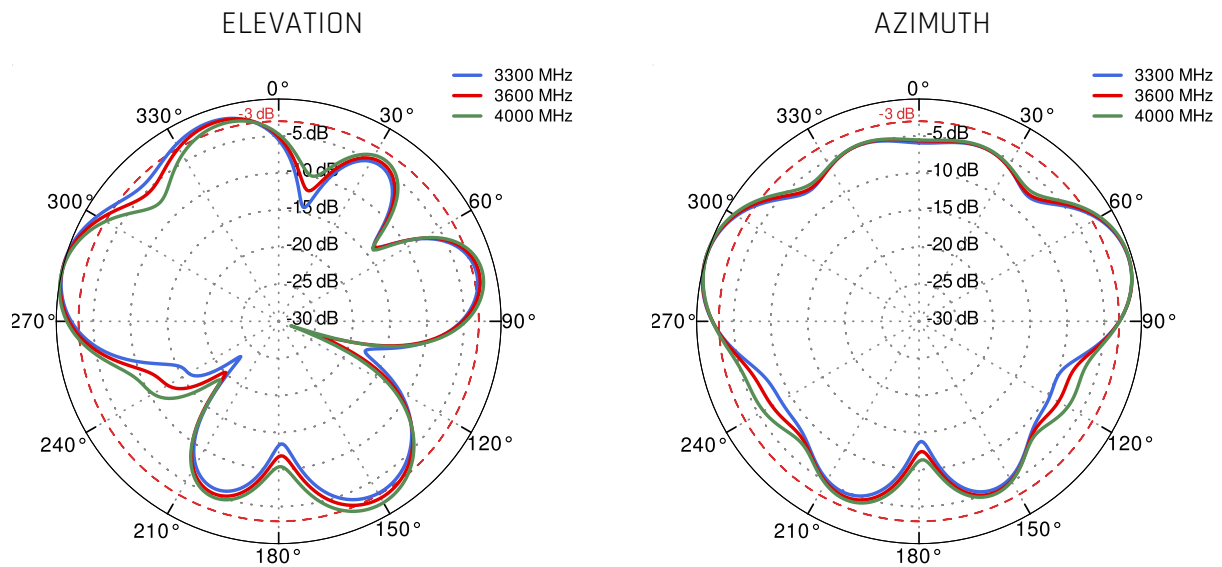


## 5G/LTE from 4.5GHz to 5.5GHz

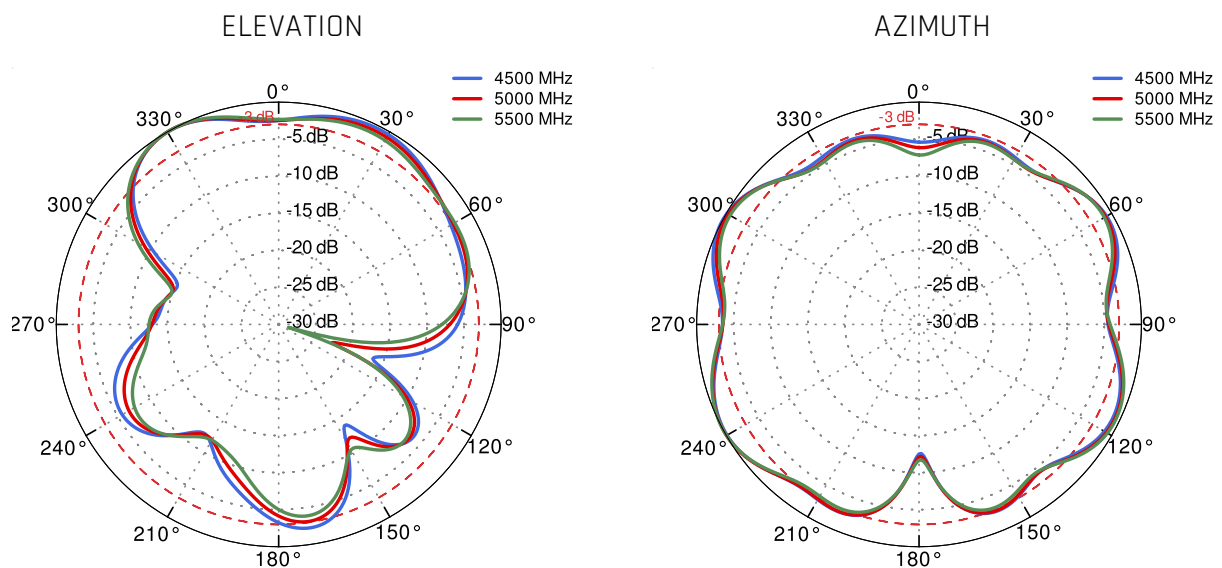



Wi-Fi 2.4 GHz and 5 GHz

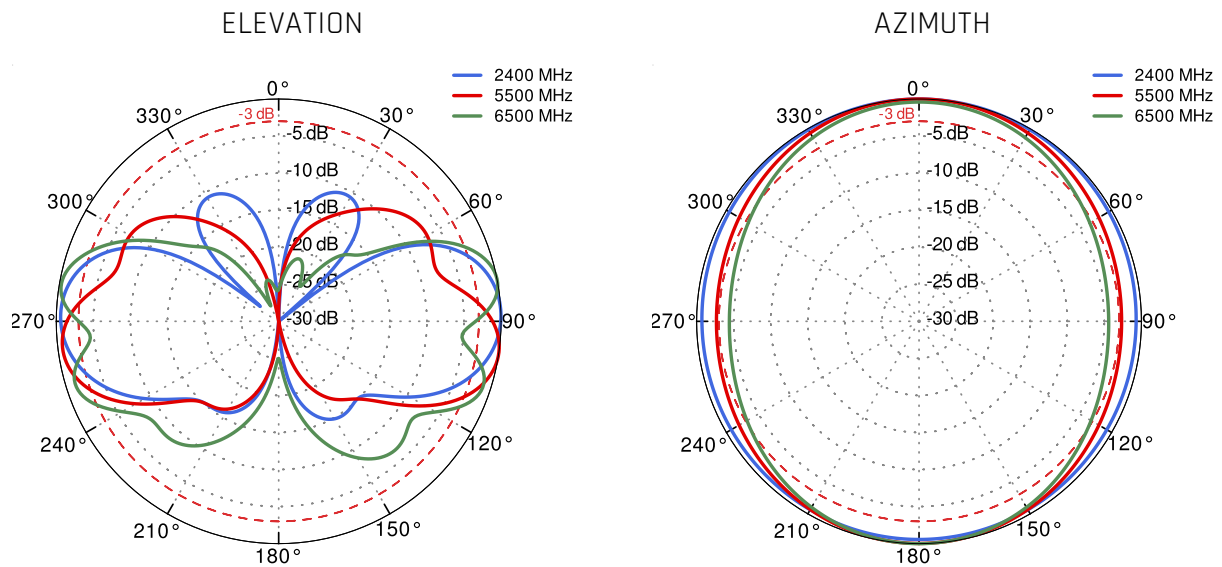

## DIMENSIONS

